

# LED Wall Packs

## MODEL WP-PC 50W | WP-PC 70W




### HIGHLIGHTS

- Angle adjustable LED wall packs
- Comes with built-in photocell sensor
- Full cut off design for controllable illumination
- No light pollution and has a 0°-90° adjustable head
- Waterproof breathable technology to maintain stable atmospheric pressure
- Offers an easy, precise onsite adjustments to target the lighting direction where needed

### SPECIFICATIONS

Model	WP-PC 50W	WP-PC 70W
Wattage	50W	70W
Voltage	120-277V AC	
Lumens	6000 lmn	7700 lmn
Beam Angle	110°	
Lifetime	50000 hours	
CRI	≥ 80	
Dimmable	No	
Rating	Non-IC Rated / Indoor and Outdoor use / for Wet locations	
Grade of Protection	IP 65	
Application	Buildings / Loading bay / Commercial entryways / Outdoor areas	
Colour Temp.	4000K (Natural White)	
Operating Temp.	-30°C ~ +40°C	
Warranty	5 years	

### DIMENSIONS

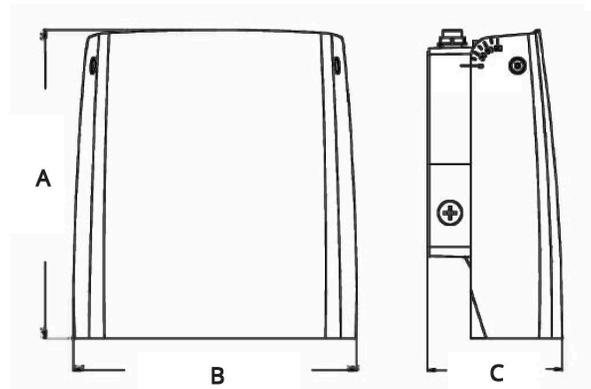

Model	WP-PC 50W	WP-PC 70W
A	7-3/8" (188 mm)	10-1/2" (267 mm)
B	6-1/4" (158 mm)	9-3/4" (247 mm)
C	3-11/16" (94 mm)	4-5/8" (117 mm)

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.