



# CF3-SERIES GARAGE LUMINAIRE WITH MOTION SENSOR



Project	
Date	
Prepared by	
Model #	CF3-604-MS-1

## OVERVIEW

The CF3 Series is a next generation LED Canopy luminaire purpose-built for parking garages. With a specially designed fresnel lens that provides 360° light dispersal, an integrated motion sensor to detect occupancy, and an ultra-thin profile that helps to preserve height clearance, this is the fixture of choice when a project requires maximum lateral lighting in low height environments.

## PRODUCT HIGHLIGHTS

- Integrated Multi-Function Microwave Motion Sensor Sets Detection Zone, Stand-By Time, Dimming and Hold Time
- Aluminum alloy for superior heat dissipation
- Moisture-resistant Wet Location rated and IP65 listed
- Grooved fresnel lens specially engineered for 360° light dispersal
- Epoxy potted driver reduces interference with sensors




### OPTICAL SPECIFICATIONS

Lumen Output (lm) <sub>1</sub>	7677 lm	Beam Angle (°) <sub>1</sub>	150°
CCT (K) <sub>1</sub>	4000k	Projected Lifetime (L <sub>70</sub> )	>50,000 hrs
CRI (Ra) <sub>1</sub>	>86	Lumen Maintenance Factor	70% (L <sub>70</sub> )
Efficacy (lm/W) <sub>1</sub>	124.44 lm/W	Chromaticity Shift	±50K

### ELECTRICAL SPECIFICATIONS

Power	60W	Current Draw at 120V <sub>AC</sub> (A) <sub>2</sub>	0.63A
Apparent Power (VA)	64.8VA	Current Draw at 208V <sub>AC</sub> (A) <sub>2</sub>	0.36A
System Wattage (W)	61.7W	Current Draw at 240V <sub>AC</sub> (A) <sub>2</sub>	0.31A
Input Voltage <sub>2</sub>	120-277VAC	Current Draw at 277V <sub>AC</sub> (A) <sub>2</sub>	0.27A

### PRODUCT DIMENSIONS

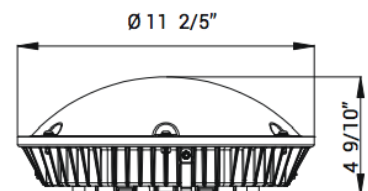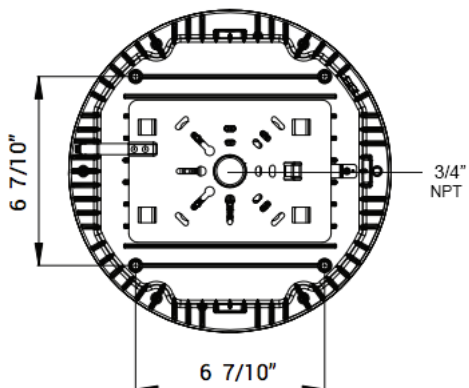

## LED & DRIVER SPECIFICATIONS

LED (Brand)	NICHIA	Power Factor	0.9
LED Design Origin	Japan	THD	14.62%
LED Type	SMD 3030	Driver Class	Class 2
Dimmable	Yes (0-10V)	Driver Feature	Epoxy potted
Output Voltage (VDC)	30-42VDC	Surge Protection	2kV (Line to Earth)
Lighting Control	Microwave Occupancy Sensor		

### CONSTRUCTION

Housing Material	Powder Coated Aluminum Alloy
Housing Color	White
Lens Material	Polycarbonate
Dimensions (inch/mm)	11.3"Φ x 4.9" 287 mmΦ x 125 mm
Knockout Size	3/4" NPT
Weight (kg/lbs)	4 kgs / 8.8 lbs
Installation Method	Surface mount, pendant mount
Operation Range (°C/°F)	-40°C to 40°C -40°F to 104°F
Warranty <sub>3</sub>	10 Year (fixture), 5 Year (sensor)

### APPROVALS & LISTINGS


DLC Premium	PLYFP4PTS3Z0
IP Rating	IP65
Wet Location Rated	Yes
UL/ETL Listed	cULus
UL/ETL File Number	E473127

#### Rated Lifetime<sup>1</sup>


Models	Lumen Output = 70% of Initial (L <sub>70</sub> ) <sup>2</sup>
CF3-40x-MS-x CF3-60x-MS-x	>50,000 hrs

1. Rated Lifetime projected the time needed for the fixture to drop its lumen output to 70% of its initial value, which was measured based on IESNA LM-79-80 luminaire test report.
2. Calculations are based on TM-21 luminaire test report, estimated rated lifetime (hours) at T<sub>A</sub>=77°F / 25°C (ambient temperature).

### POLAR CANDELA DISTRIBUTION

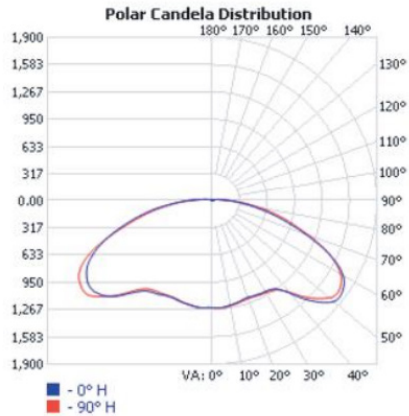


### ILLUMINANCE AT A DISTANCE

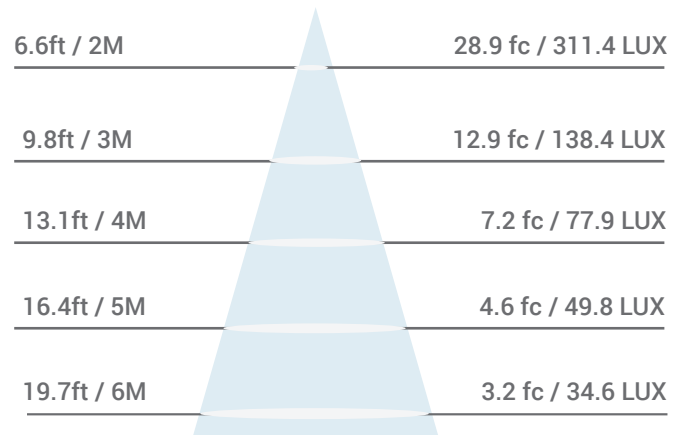

### MOTION SENSOR DEFAULT SETTINGS

By default the fixture's motion sensor is preset with the following default settings:

- Detection at 65 feet / 20 meters range (100%)
- Starts to dim after 5 seconds
- Dims at dimming Level of 10%
- Turn off at 0 seconds (immediately)

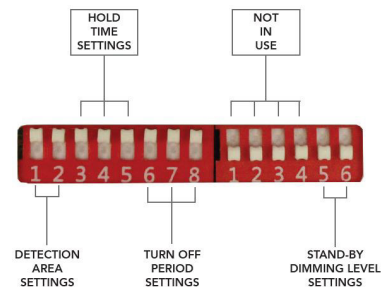

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.  
2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.  
3. Refer to Warranty Terms & Conditions available at [premiseled.com/warranty](http://premiseled.com/warranty)