



FL4-SERIES MULTI-MOUNT FLOOD LIGHT



Project	
Date	
Prepared by	
Model #	FL4-2404T5-1

OVERVIEW

The FL4-Series Flood Light represents our entry into specification grade exterior lighting. Finished in black, its sleek design and larger housing size provides an attractive look, especially when mounted on poles. Offering a wide range of mounting options, lumen packages, IES beam distribution patterns, and integrated controls, they will allow you to achieve any design requirement.

PRODUCT HIGHLIGHTS

- Interchangeable mounting options to adapt to any application: yoke, trunnion, slip fitter or mounting arm*
- Operates in -40°F/-40°C degree outdoor weather
- 1-10V dimming for maximum control and energy savings
- IP65 and Wet Location rated
- Black contemporary finish to complement all outdoor environments
- Available with integrated motion sensor or photocell (optional)

*Fixture does not include mount. Mount must be ordered separately.



OPTICAL SPECIFICATIONS

Lumen Output (lm) ₁	32744 lm	Beam Angle (°) ₁	Type V (125°x160°)
CCT (K) ₁	4000K	Projected Lifetime (L ₇₀)	50,000 hrs
CRI (Ra) ₁	80	Chromaticity Shift	±250K
Efficacy (lm/W) ₁	136 lm/W		

ELECTRICAL SPECIFICATIONS

Power	240W	Replacement For	Up to 1000W HID or HPS/MH
Apparent Power (VA)	247.5VA	Current Draw at 120V _{AC} (A) ₂	1.932A
System Wattage (W)	239.92W	Current Draw at 208V _{AC} (A) ₂	1.071A
Input Voltage	100-277VAC	Current Draw at 240V _{AC} (A) ₂	1.009A
Output Voltage (VDC)	56VDC	Current Draw at 277V _{AC} (A) ₂	0.864A

PRODUCT DIMENSIONS

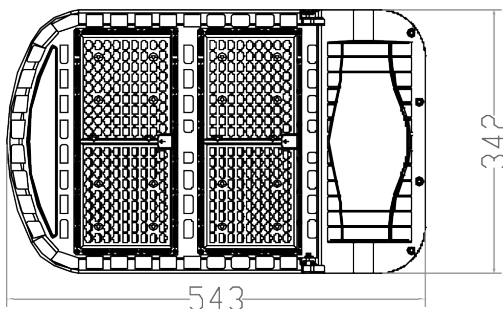

CONSTRUCTION

Housing Material	Aluminum Alloy	Installation Method	Wall Mounted/ Square Pole Mounted/ Round Pole Mounted
Housing Color	Black	Operation Range (°F/°C)	-40°F to 113°F/-40°C to 45°C
Lens Material	Polycarbonate	Weight (Kg/Lbs)	9.4kg / 20.72lbs
Dimensions (inch/mm)	21.4" x13.5" x 4.5" / 543mm x 342mm x 115mm	Warranty	10 Years


APPROVALS AND LISTINGS

DLC Premium	POM0NQ6	IP Rating	IP65
Wet Location Rated	Yes	EPA Rating	2.57ft²
UL/ETL	cETLus	BUG Rating	B5-U3-G5

LED AND DRIVER SPECIFICATIONS

LED Type	3030	Surge Protection	L/N-PE: 10KV, L-N: 6KV
Dimmable	Yes (1-10V)	Inrush Current (A)	60A/130A
Power Factor	0.9	Driver Class	Class 2
THD	15%		

PHOTOMETRICS

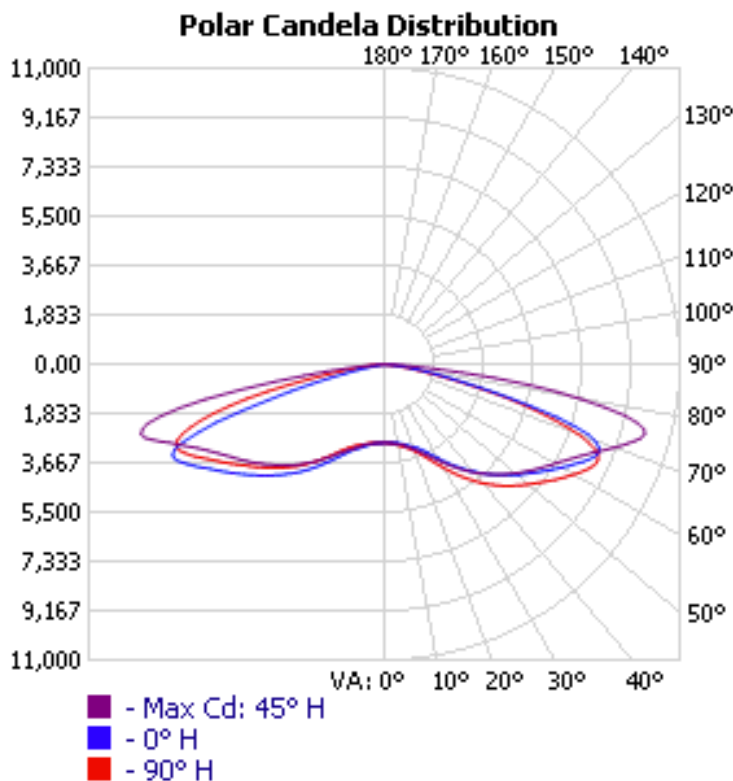

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	2,904.7	8.9%	8.9%
0-40	5,841.6	17.8%	17.8%
0-60	16,383.9	50%	50%
60-90	16,204.9	49.5%	49.5%
70-100	8,205.3	25.1%	25.1%
90-120	93.9	0.3%	0.3%
0-90	32,588.8	99.5%	99.5%
90-180	156.4	0.5%	0.5%
0-180	32,745.2	100%	100%

LCS TABLE

BUG RATING	B5 - U3 - G5
FORWARD LIGHT	LUMENS LUMENS %
LOW(0-30):	1,435.5 4.4%
MEDIUM(30-60):	6,684.9 20.4%
HIGH(60-80):	7,718.1 23.6%
VERY HIGH(80-90):	854.7 2.6%
BACK LIGHT	
LOW(0-30):	1,468.9 4.5%
MEDIUM(30-60):	6,795.9 20.8%
HIGH(60-80):	7,235.5 22.1%
VERY HIGH(80-90):	394.6 1.2%
UPLIGHT	
LOW(90-100):	36.8 0.1%
HIGH(100-180):	119.6 0.4%
TRAPPED LIGHT:	0.0 0%

ILLUMINANCE AT A DISTANCE

HEIGHT(FT)	CENTER BEAM	BEAM SPREAD(FT)		FIELD SPREAD(FT)	
	FOOTCANDLE	HORIZONTAL	VERTICAL	HORIZONTAL	VERTICAL
4.00	182.23 FC	13.7	35.8	27.2	67.2
8.00	45.56 FC	27.3	71.7	54.4	134.3
12.00	20.25 FC	41.0	107.5	81.6	201.5
16.00	11.39 FC	54.6	143.3	108.8	268.7
20.00	7.29 FC	68.3	179.1	136.0	335.9
		BEAM ANGLE		FIELD ANGLE	
		119.3°	154.8°	147.2°	166.4°

MOUNTING OPTIONS

	FL-MA4	Mounting Arm for FL4-Series Area/Flood Lights		FL-SF4	Slip Fitter for FL4-Series Area/Flood Lights
	FL-TR4	Trunnion Mount for FL4-Series Area/Flood Lights		FL-YK4	Yoke Mount for FL4-Series Area/Flood Lights

ACCESSORIES

	PC1-TPT-1	Stem Mount Swivel Photocell (Compatible with Mounting Arm or Slip Fitter option only)		FL-SHIELD24	Glare Shield for FL4-Series Area/Flood Lights (200W/240W/300W models only)
---	------------------	---	---	--------------------	--

PRODUCT KEY

FL4	-				-		-		Adders
Product Series			CCT		Voltage				
			☐ 4 - 4000K		☐ 1 - 100-277V ☐ 2 - 277-480V				
		Wattage		LENS					
		☐ 80 ☐ 100 ☐ 150 ☐ 200 ☐ 240 ☐ 300 ☐ 450		☐ T3 - Type III Distribution ☐ T4 - Type IV Distribution ☐ T5 - Type V Distribution					

Example
FL4-2404T3-1-M6P1

FACTORY INSTALLED ADDERS

Motion Sensor Adders

☐ M6 Microwave Motion Sensor, Dimmable, 120-277V (80W-300W models)
☐ M7 Microwave Motion Sensor, Dimmable, 120-277V (450W model)

Photocell Sensor Adders

☐ P1 Stem Mount Photocell, 120V (Mounting Arm and Slip Fitter Only)

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.
3. Refer to Warranty Terms & Conditions available at premiseled.com/warranty