

Please go to www. quozel. com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (1) Medium Base bulb 100W Maximum, Alternate bulb (1) 23W CFL.

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

Package Contents

- A** Mounting Screw x 3



STEP 3 – Drill Pilot Holes on Post

- A. Carefully fit the Post Fitter over the end of the Post (not supplied), making sure the Post Fitter is fully seated.
- B. Mark the drill point for the (3) Mounting Screws, using (3) Mounting Holes as reference. After marking hole locations, remove fixture from post and drill 1/16" pilot holes for screws.

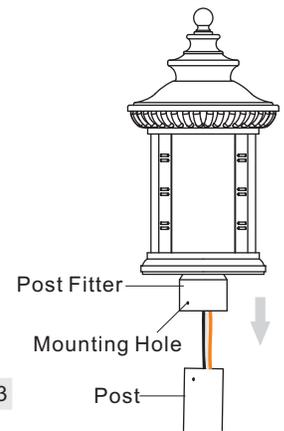


Figure 3

STEP 1 – Remove Package inside of the Fixture

- A. Unscrew Allen Screws on the Fixture Hood and remove Fixture Hood from the Cage.
- B. Remove Styrofoam inside of the Cage.
- C. Unscrew Screws and Tabs on the top edge of the Glass. Remove the Glass from the Cage and remove Foams around the Glass.

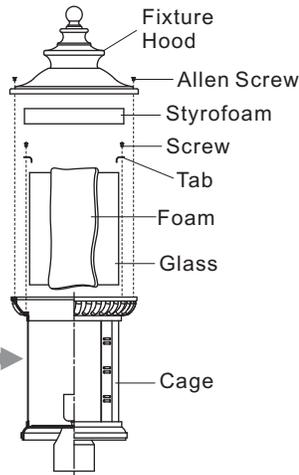


Figure 1

STEP 4 - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

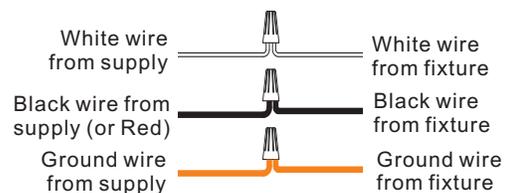


Figure 4

STEP 2 – Install Glass, Bulb and Fixture Hood

- A. Place the Glass back into the Cage and secure with the Tabs and Screws.
- B. This fixture uses standard bulb with medium base. Maximum 100 watts. Insert bulb and screw snugly into place.
- C. Place the Fixture Hood back onto the Cage and secure with Allen Screws. Hand tighten until snug.

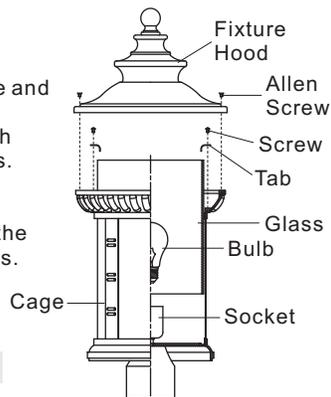


Figure 2

STEP 5 – Attach Fixture Body to Post

- A. Coat the top 1" of the Post with Clear Silicone Caulk (not supplied) and position the Post Fitter onto the Post. Be sure to seat it completely, aligning the holes in the Fitter with the 1/16" Pilot Holes drilled into the Post.
- B. Secure the Fixture to Post with (3) Mounting Screws (A).

Your fixture is now assembled and ready to use. Enjoy!

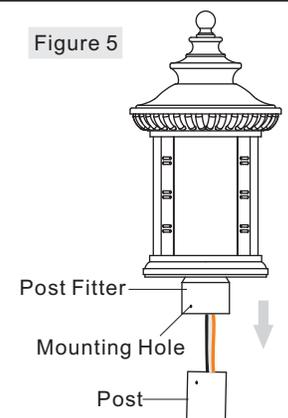


Figure 5

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700 or visit us on-line at www. quozel. com

HOW TO REPLACE GLASS

- A. Unlock Allen Screws on the Fixture Hood and remove Fixture Hood from the Cage.
- B. Remove Bulb from inside of the Cage.
- C. Unscrew Screws and Tabs on the top edge of the Glass and replace the Glass. Re-attach the Tabs and Screws onto the top edge of the replacement Glass to secure it properly.
- D. Re-install the Bulb and re-attach the Fixture Hood to the Cage. Secure with Allen Screws and hand tighten until snug.


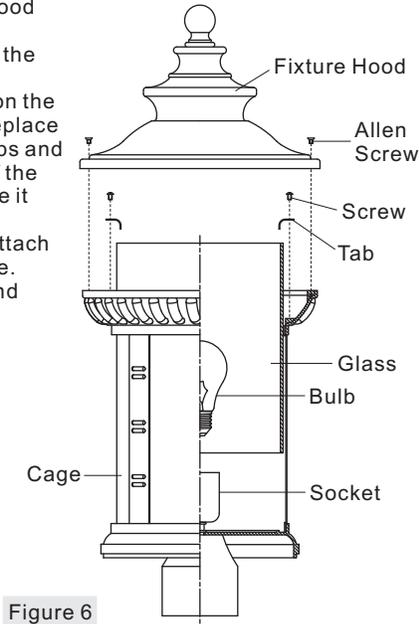



Figure 6

CHI9011IB

FINISH: IMPERIAL BRONZE

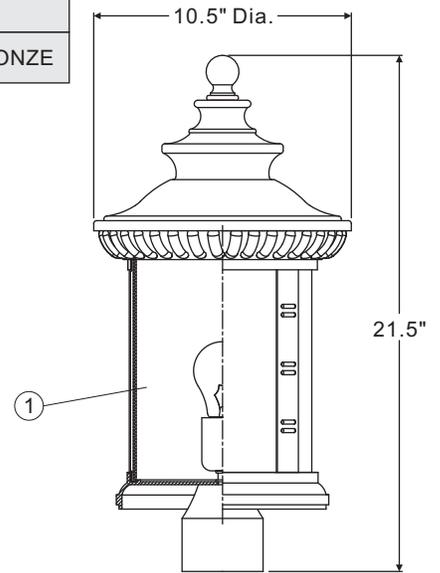

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"



(1) 100W Medium Base Bulb (Not Supplied)

NO.	PART NUMBER	REPLACEMENT PART	REQ.
1	G2861SH	GLASS SHADE	1

Thank you for purchasing a Quoizel product.
 Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
 or visit us on-line at www.quoizel.com