



### Tools Required

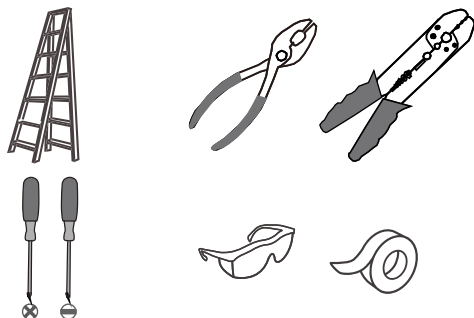

### Light Source

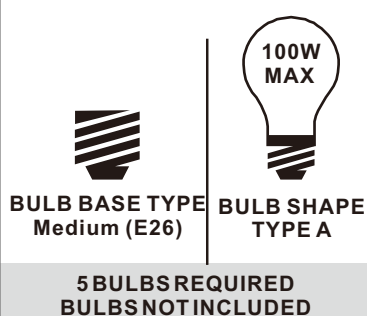

### Fixture Height Adjustable 16.75" to 46.75"

#### ⚠ Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.




Turn off power to the fixture and allow the bulbs to cool before replacing.

### Package Contents

**Preparation:** Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.

#### PARTS BAG

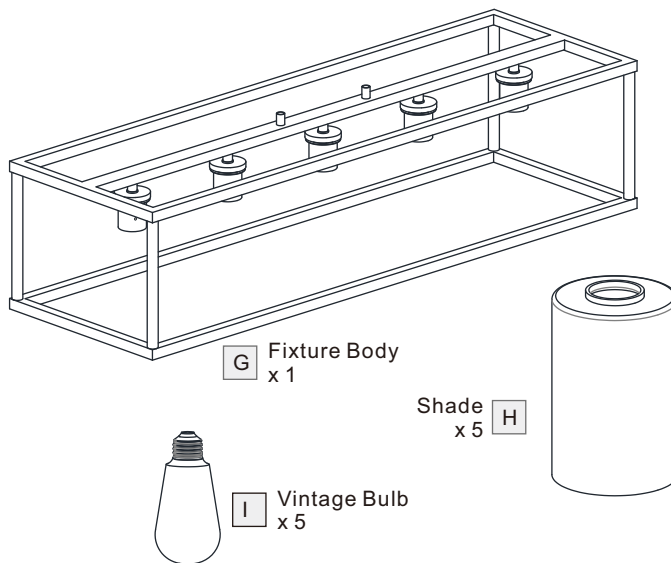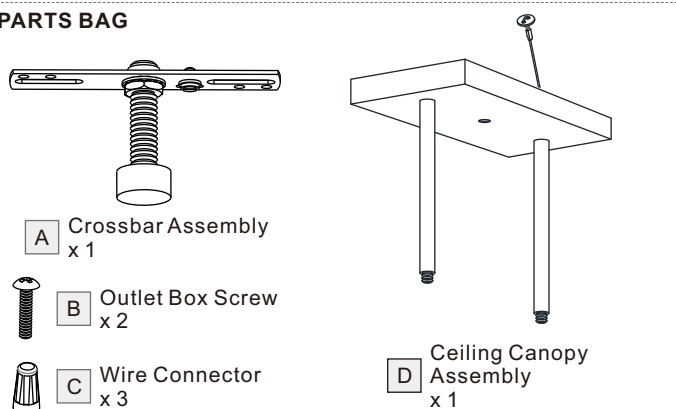


### Table of Contents

Crossbar Assembly	Ceiling Canopy Assembly & Rods	Lanyard	Wiring	Ceiling Canopy	Shade	Bulb
STEP 1	STEP 2	STEP 3	STEP 4	STEP 5	STEP 6	STEP 7

## STEP 1



1

Step 1  
Install crossbar assembly

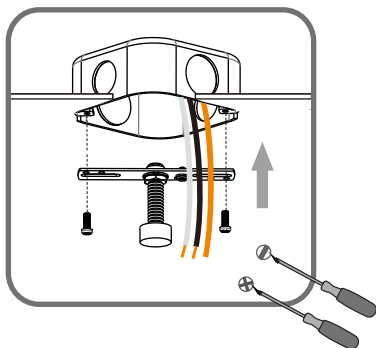

2

Step 2 - 3  
Test fitting ceiling canopy to nipple

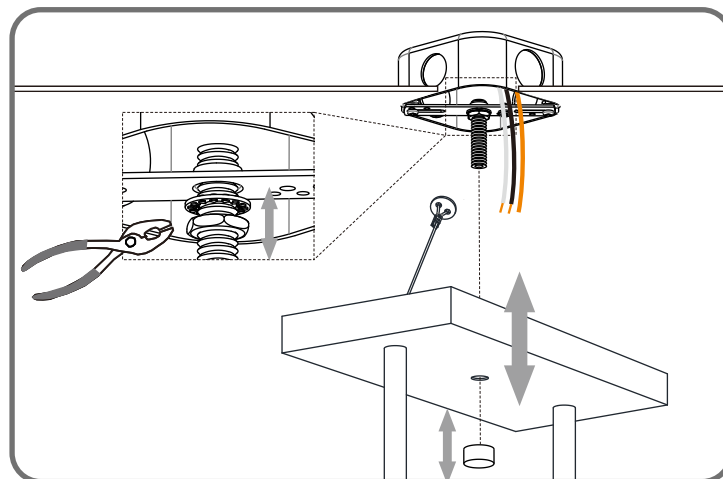


3

## STEP 2


### Optional Rods

8' ceiling:  
(2) 6"L + (2) 12"L rods  
9' ceiling:  
(2) 6"L + (4) 12"L rods  
10' ceiling:  
(4) 6"L + (4) 12"L rods



1


Remove 6"L rod from  
ceiling canopy

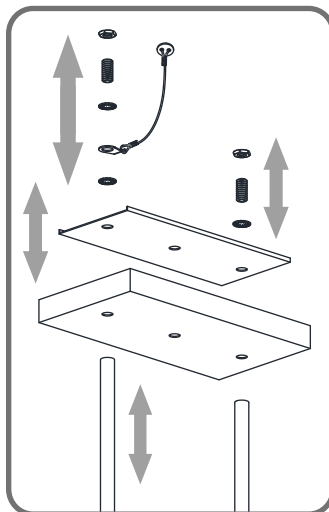

Install ceiling canopy and  
lanyards back onto upper rod


2

Install rods to fixture body

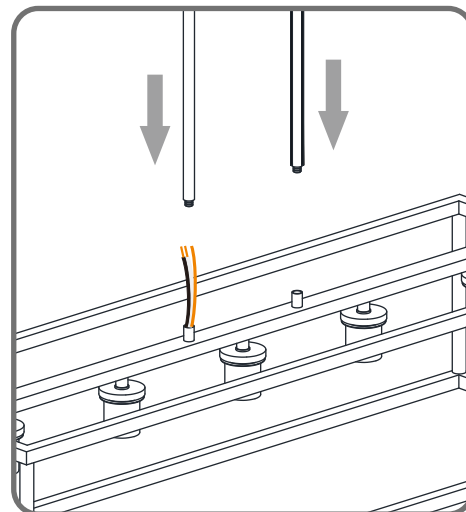


3


### STEP 3

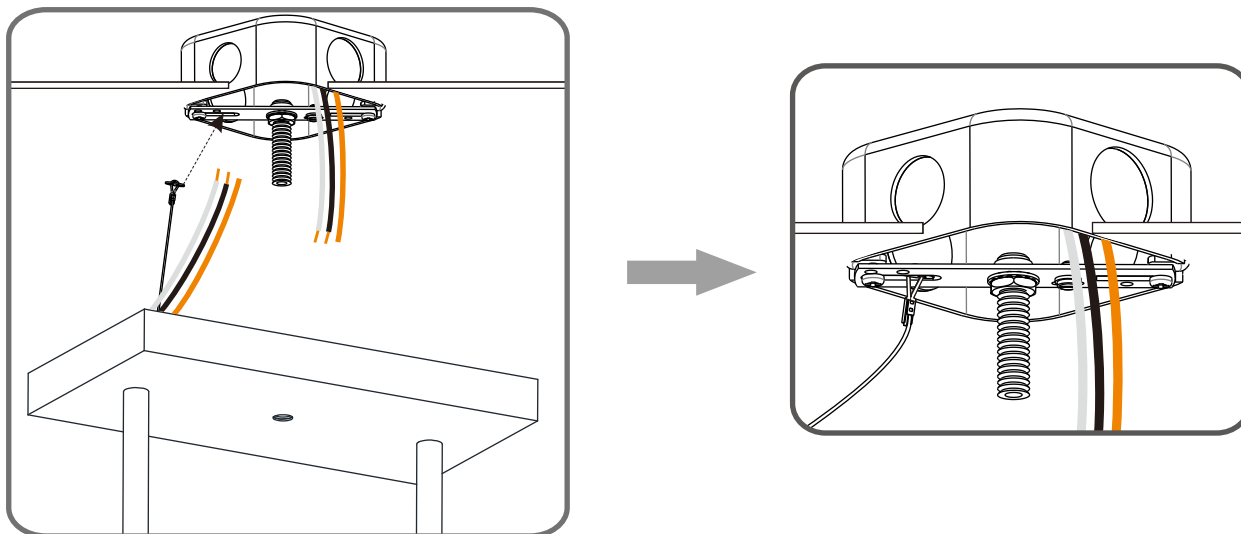

### STEP 4

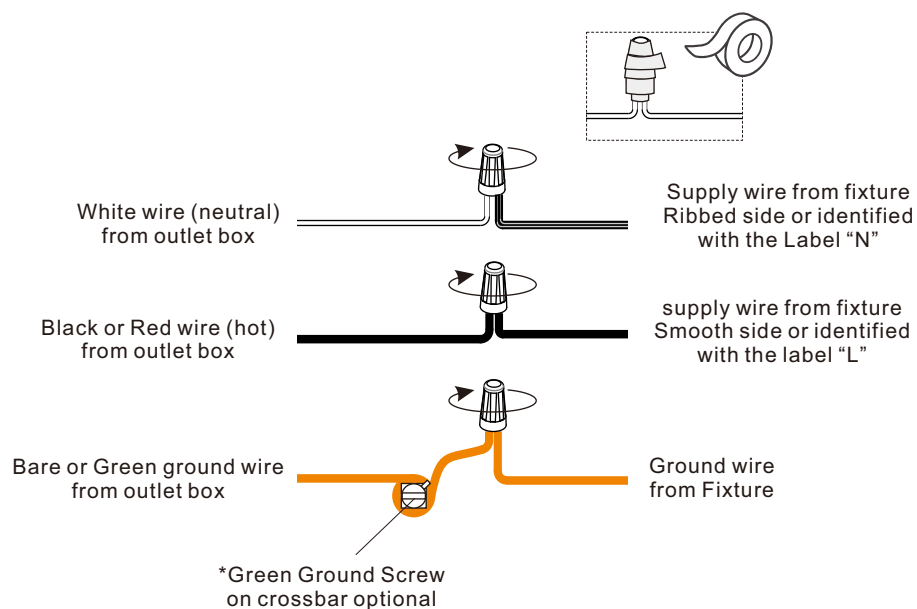


### STEP 5

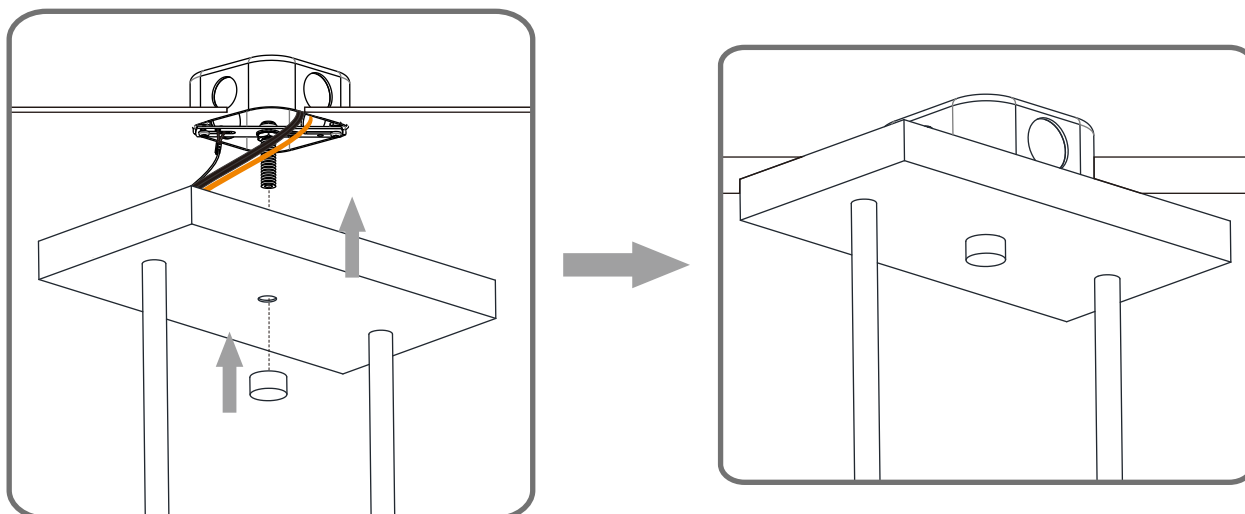

## STEP 6



1

Remove socket collar



2

Install shade

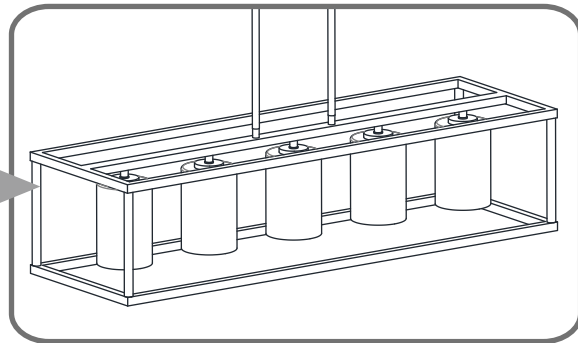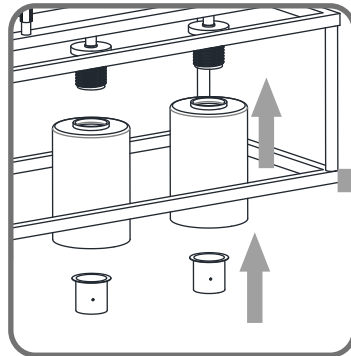

## STEP 7

