


Tools Required



Light Source

40W
MAX

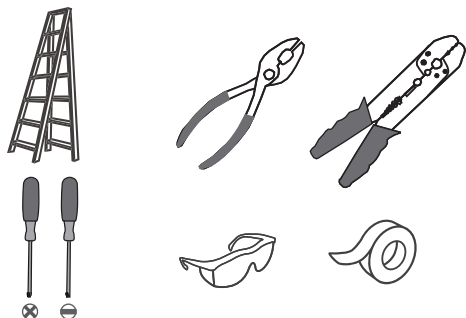

**BULB SHAPE
TYPE G9 XENON**

**9 BULBS REQUIRED
BULBS NOT INCLUDED**

**Fixture Height Adjustable
16.5" to 46.5"**

⚠ Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.

Turn off power to the fixture and allow the bulbs to cool before replacing.


Do not touch the bulb with bare hands use a cloth or glove.

Package Contents


Preparation: Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.

PARTS BAG



A Crossbar
x 1




B Lock Screw
x 2




C Outlet Box Screw
x 2




D Wire Connector
x 3




E Ceiling Canopy
x 1



F 6"L Rod
x 2



G 12"L Rod
x 2

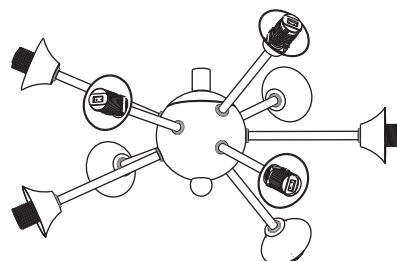

H Fixture Body
x 1




I Bulb
x 9



J Socket
Collar Tool
x 1



K Socket Collar
x 9




L Shade
x 9

Table of Contents

Downrod	Crossbar	Wiring	Ceiling Canopy	Shade&Bulb
STEP 1	STEP 2	STEP 3	STEP 4	STEP 5

STEP 1



For angled ceilings,
Swivel opening towards wall.



Optional Rods

8' ceiling:
(2) 6"L + (1) 12"L rods
9' ceiling:
(2) 6"L + (2) 12"L rods





1


2

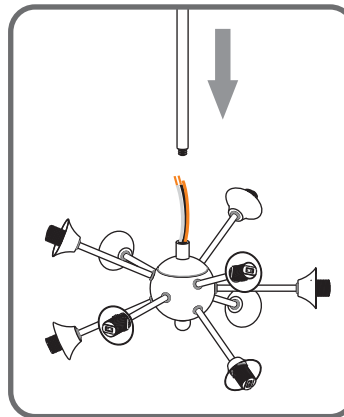



STEP 2

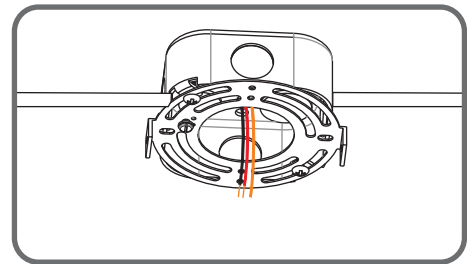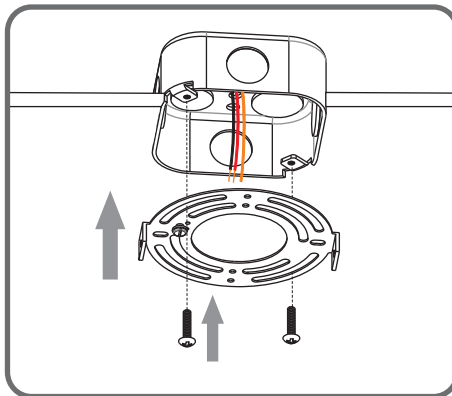

STEP 3

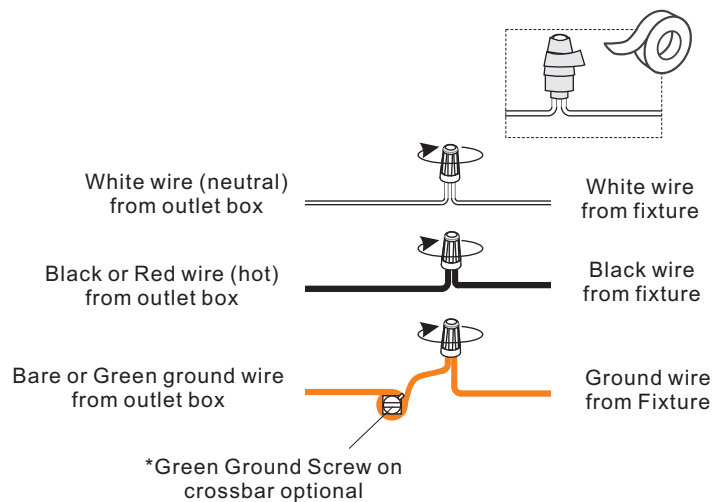


STEP 4

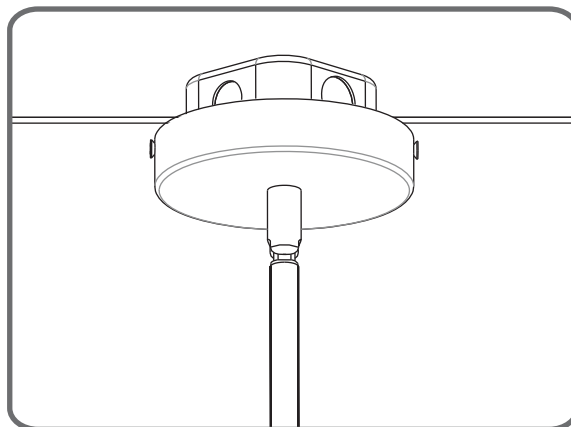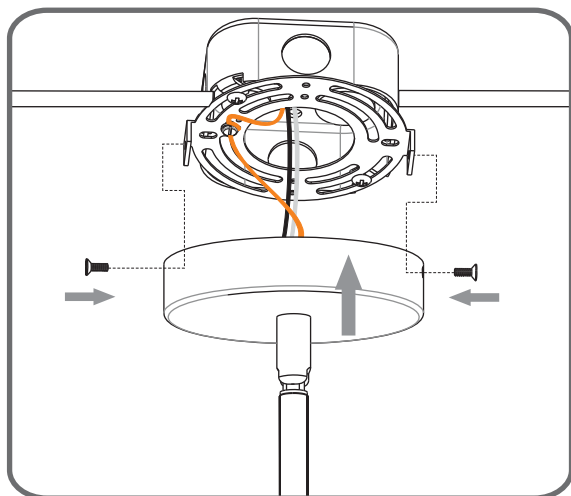

STEP 5

1

Install Shade

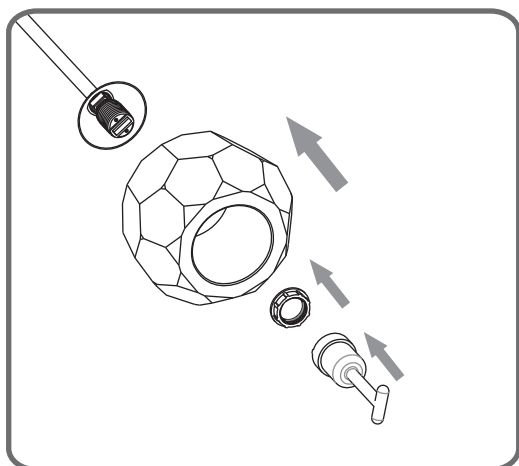

2

Install Bulb

