

SAFETY INFORMATION

Released Date: 2024-03-25

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

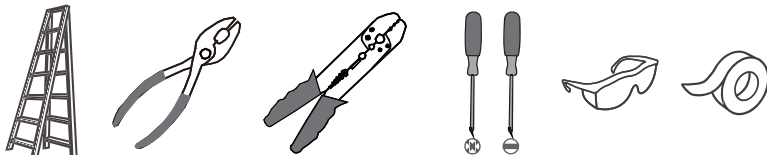


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quoizel.com.

PACKAGE CONTENTS

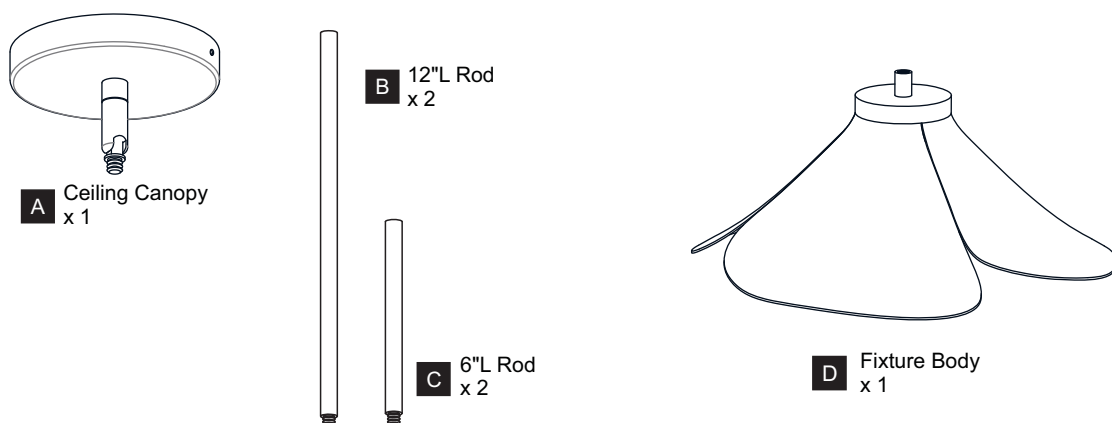


MOUNTING HARDWARE

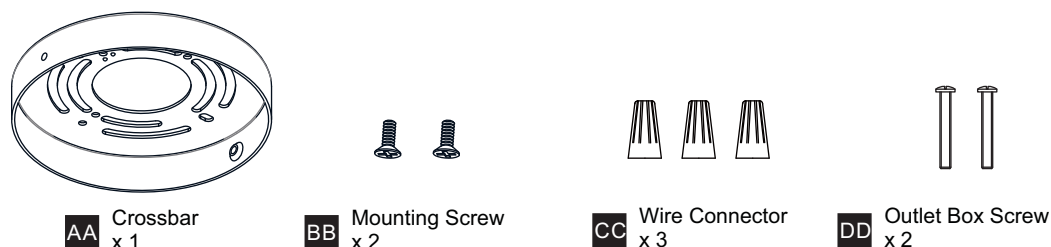



INSTALLATION


OPTION 1: PENDANT - QP6747MBK ,QP6747LG


1 **Install Rods**
Optional Rods:
8 Feet Ceiling:
(2) 12"L Rods.
9 Feet Ceiling:
(2) 6"L Rods + (2) 12"L Rods.

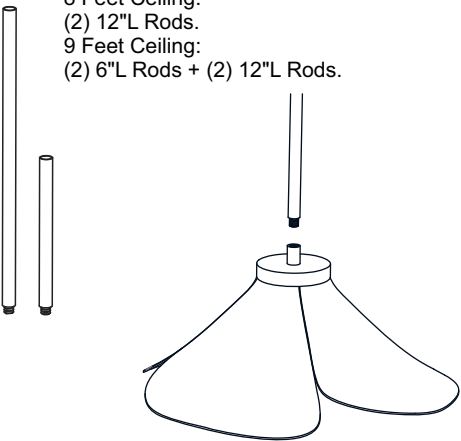



2 **Tighten hex nut inside of the Ceiling Canopy**

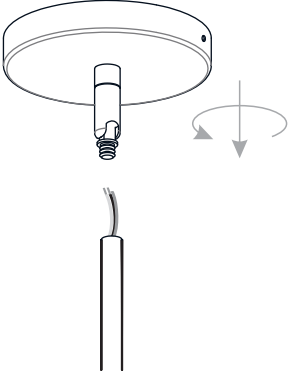
3 **Install Ceiling Canopy to Upper Rod**

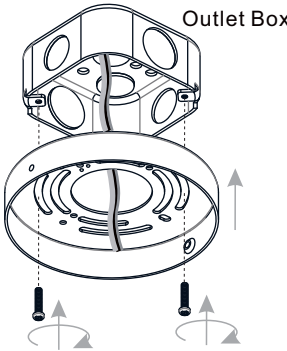
4 **Install Crossbar**

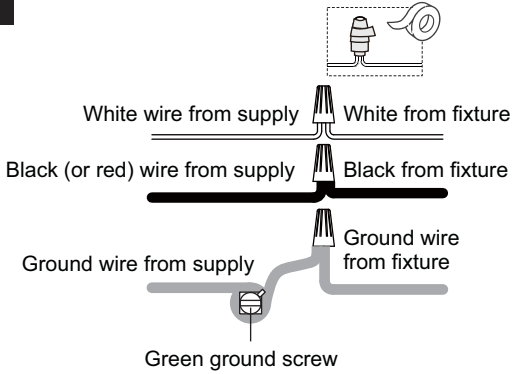
5 **Wiring**

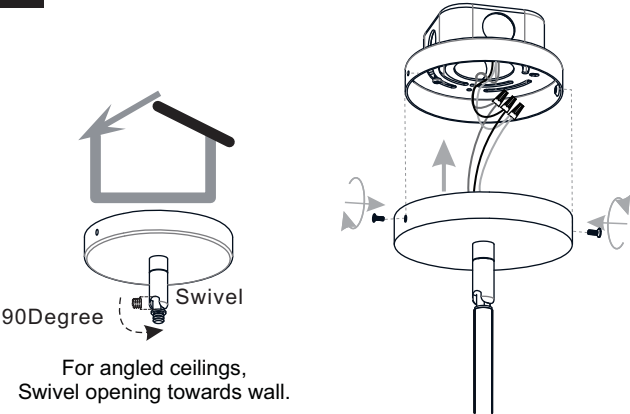
6 **Install Ceiling Canopy to Crossbar**

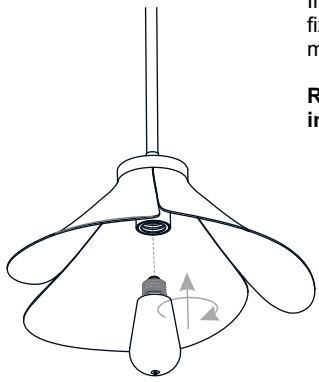
7 **Install Bulb**
Install one correct bulb referring to fixture markings and/or labels for maximum wattage.
Recommended Bulb type (not included):


BULB BASE TYPE
Medium (E26)

BULB TYPE
TYPE A
100W MAX


Your installation is now complete! Restore electricity and save this sheet for future reference.

INSTALLATION


IMPORTANT: This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. **DO NOT CUT SUPPLY WIRES** if you intend to use it as pendant light.

OPTION 2: SEMI-FLUSH - QSF6747MBK,QSF6747LG

* Set aside (2) 6"L Rods and (2) 12"L Rods, swivel since they are not required for the semi-flush installation.




1 Remove Swivel

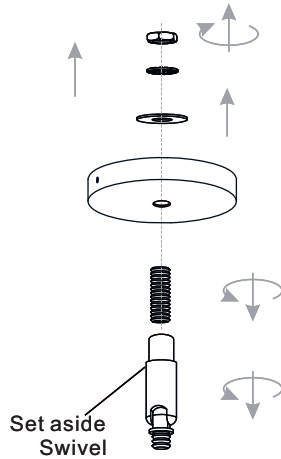


2 Install Ceiling Canopy to Fixture Body


* Cut the supply wires leaving approximately 8" of wire extending from the ceiling canopy after assembly.

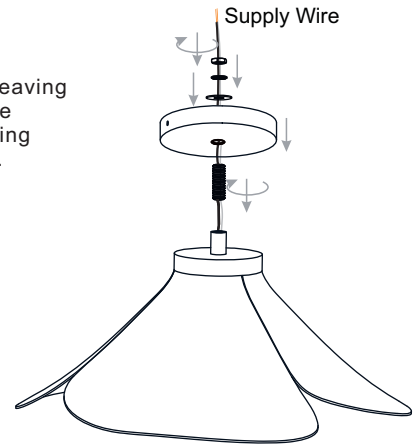

3 Wiring

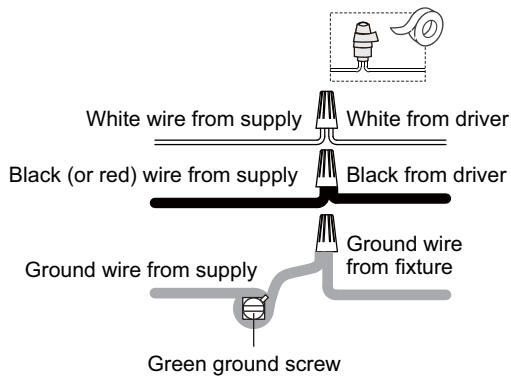

4 Install Ceiling Canopy to Crossbar

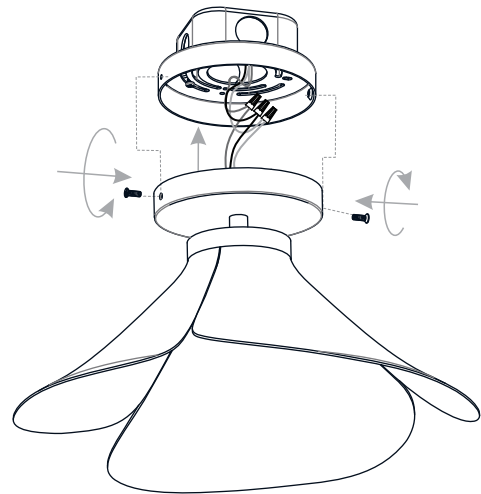

5 Install Bulb

Install one correct bulb referring to fixture markings and/or labels for maximum wattage.


Recommended Bulb type (not included):



BULB BASE TYPE
Medium (E26)



BULB TYPE
TYPE A

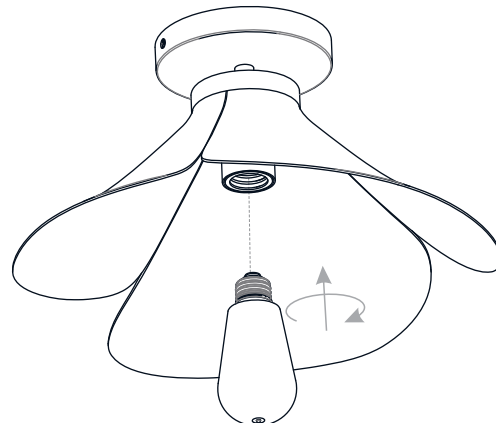

Your installation is now complete! Restore electricity and save this sheet for future reference.