



CCM-LED80

COACHMAN SERIES

Post Top LED Area Light



SPECIFICATIONS

Watts	82.58
Lumens	8162.85
Efficacy	98.83
Replaces Up To	250W MH
Colour Temp	3K, 4K*, 5K
Operating Temp	-40°C to 40°C
Voltage	120-277V*, 347V
LED Life	100,000 hours
Housing Material	Die Cast Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	9.11
Power Factor	0.983
Mounting Options	Post Top Mount, Wall Mount with decorative arm
Finish	Sandtex Black, Custom Colours
Beam Pattern	T5*, T2

* Standard configuration



DESCRIPTION

Ideal for pathway and area lighting applications, the Coachman LED is the new improved energy efficient version of the original lantern style HID fixture.

APPLICATIONS



Office
Complexes



Campuses



Parks



Townhouses




Walkways


FEATURES

- Available in 3 wattages - 41W, 83W and 113W
- Cast aluminum housing with clear lens.
- Post top mount to fit a 3 inch diameter tenon.
- Decorative wall mount bracket available as an accessory.
- Traditional lantern style design.
- 90° or 180° house side cut off shield options available.
- Pole options include DPP4 and SPR.

DIMENSIONS

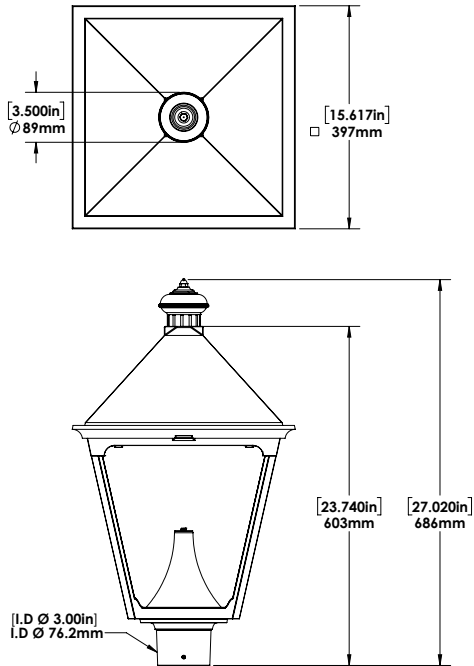


With Decorative Top (Standard)

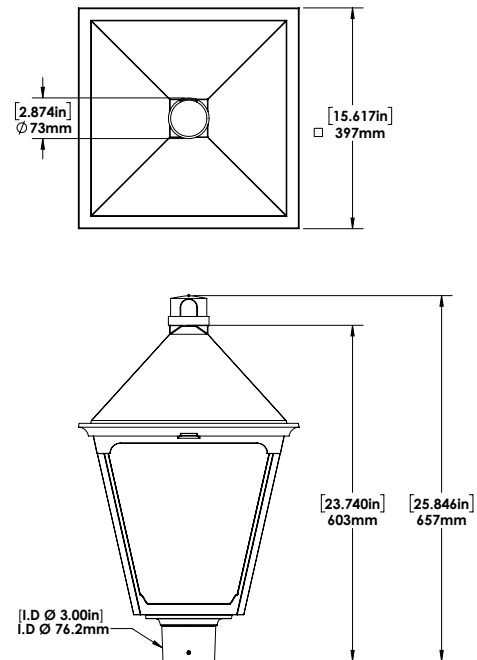


With Photocell (Option)



DECORATIVE ARM 3\"/>

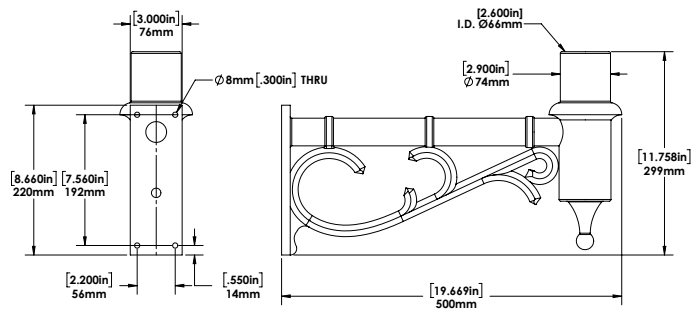


HOUSE SIDE CUT OFF SHIELD



C90

90° House Side
Cut-off shield



C180

180° House Side
Cut-off shield

POLE OPTIONS



8' to 14'

DPP4



8' to 16'

SPR

SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT(K)	CRI
CCM-LED80-B-3K-T5-XXX-DIM	120-277	82.58	8151.53	98.70	9.11	0.983	3041	72.92
CCM-LED80-B-4K-T5-XXX-DIM	120-277	82.58	8162.85	98.83	9.11	0.983	3956.5	73.56
CCM-LED80-B-5K-T5-XXX-DIM	120-277	82.58	8174.18	98.97	9.11	0.983	4872	74.2
CCM-LED80-B-3K-T2-XXX-DIM	120-277	82.58	7766.60	94.03	9.11	0.983	3041	72.92
CCM-LED80-B-4K-T2-XXX-DIM	120-277	82.58	7777.39	94.17	9.11	0.983	3956.5	73.56
CCM-LED80-B-5K-T2-XXX-DIM	120-277	82.58	7788.17	94.30	9.11	0.983	4872	74.2
CCM-LED80-C-3K-T5-XXX-DIM	347	83.2	8156.02	98.02	12.02	0.9679	3041	72.92
CCM-LED80-C-4K-T5-XXX-DIM	347	83.2	8167.35	98.16	12.02	0.9679	3956.5	73.56
CCM-LED80-C-5K-T5-XXX-DIM	347	83.2	8178.68	98.30	12.02	0.9679	4872	74.2
CCM-LED80-C-3K-T2-XXX-DIM	347	83.2	7771	93.4	12.32	0.987	3041	72.92
CCM-LED80-C-4K-T2-XXX-DIM	347	83.2	7781.67	93.52	12.32	0.987	3956.5	73.56
CCM-LED80-C-5K-T2-XXX-DIM	347	83.2	7792.46	93.65	12.32	0.987	4872	74.2

Legend

B - 120-277V, C -347V
 3K - 3000K, 4K - 4000K, 5K - 5000K
 T5 - Type V, T2-Type 2
 XXX - Finish
 DIM - Dimmable

ORDERING GUIDE

CCM								
	WATTS	VOLTAGE	COLOUR TEMP.	BEAM PATTERN	FINISH	DIMMING	CONTROLS	OPTIONS
	LED80	B - 120 - 277V* C - 347V	3K - 3000K 4K - 4000K* 5K- 5000K	T5 - TYPE V* T2 - TYPE II	SBK - SANDTEX BLACK* CC - CUSTOM COLOUR	DIM - 0 - 10V DIMMING*	PC - Photocell	C90 - 90° House Side Cut-off shield C180 - 180° House Side Cut-off shield

* Standard configuration

FR - Frosted Lens

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

096801 DECORATIVE ARM 3”R BLACK