



# GAMMA-LED80

## LED Area Light

### SPECIFICATIONS\*

|                           |                                 |
|---------------------------|---------------------------------|
| Watts                     | 79                              |
| Lumens                    | 7388                            |
| Efficacy                  | 94 lm/W                         |
| Replaces Up To            | 250W MH                         |
| Colour Temp               | 5000K, 4000K*                   |
| Operating Temp            | -40°C to +40°C                  |
| Voltage                   | 120-277V*, 347V (Coming Soon)   |
| LED Life                  | 50,000 hours                    |
| Certification             | cETLus, DLC                     |
| Housing Material          | Die Cast Aluminum               |
| Lens                      | Prismatic Polycarbonate         |
| Power Factor              | 0.9                             |
| Total Harmonic Distortion | 7%                              |
| CRI                       | 72                              |
| Mounting                  | Post top Mounting, 2-3/8" tenon |
| Accessories               | Photocell                       |
| EPA                       | 1.08                            |
| Weight                    | 17 lbs                          |



## DESCRIPTION

The GAMMA-LED is a sleek, modern post top area light with a Type 5 medium distribution. Intelligently designed, this fixture provides superior lighting performance and significant energy savings over traditional fixtures.

## APPLICATIONS



Condos



Pathways



Commercial Properties

## FEATURES

- Sleek, modern post top fixture with Type 5 medium beam distribution.
- Prismatic polycarbonate lens for glare-free, even illumination.
- Tabs on the fixture allow for easy, toolless maintenance.
- Photocell is optional.
- 10kV surge suppression is standard.

\*The above specs apply to the standard product configuration - GAMMA-LED80-B-4K-T5M-BLK-DIM. For spec information on other product configurations please see page 2.

## OTHER MODEL SPECIFICATIONS

| MODEL DESCRIPTION            | VOLTAGE (V) | INPUT POWER (W) | LIGHT OUTPUT | EFFICACY (Lm/W) | THD | PF  | CCT  | CRI |
|------------------------------|-------------|-----------------|--------------|-----------------|-----|-----|------|-----|
| Gamma-LED80-B-4K-XXX-XXX-DIM | 120-277     | 78.95           | 7388.4       | 93.58           | 7   | 0.9 | 4000 | 72  |
| Gamma-LED80-B-5K-XXX-XXX-DIM | 120-277     | 78.95           | 7388.4       | 93.58           | 7   | 0.9 | 5000 | 72  |

### LEGEND

B - 120V-277V


4K - 4000K, 5K - 5000K

XXX- BEAM TYPE 5 MEDIUM


XXX - HOUSING FINISH

DIM - 0-10V DIMMING

## DIMENSIONS

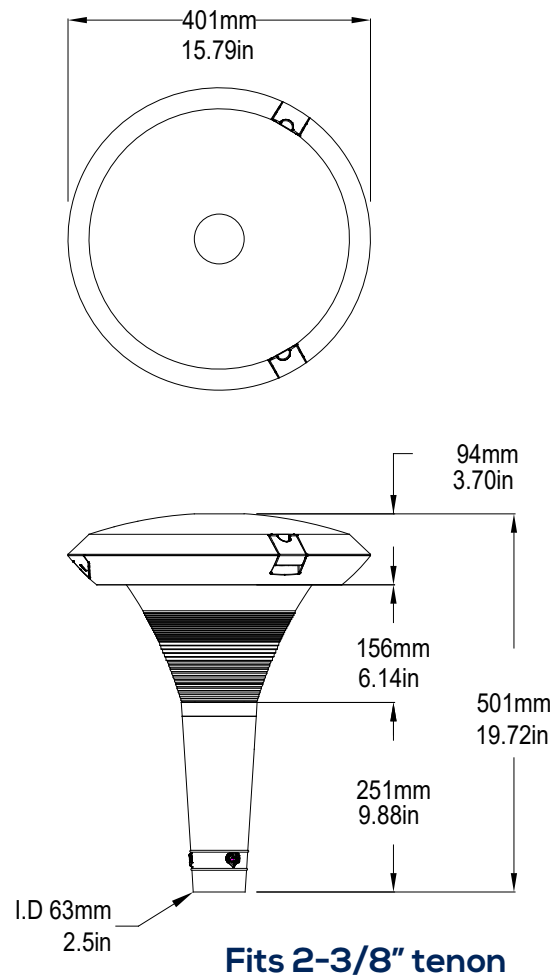

PHOTOMETRICS

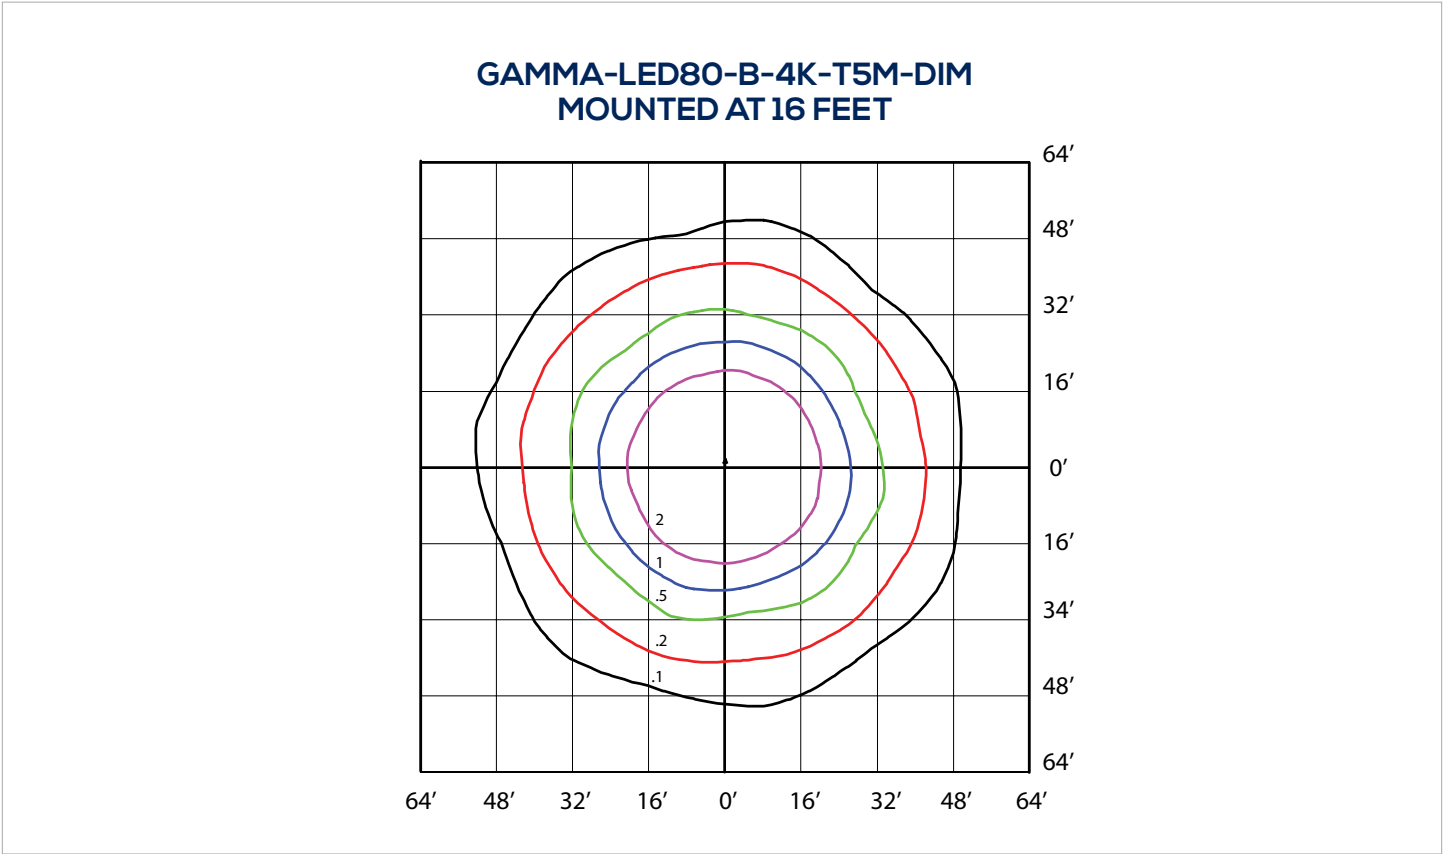

ORDERING GUIDE

|       |                        |              |                      |                     |                      |  |
|-------|------------------------|--------------|----------------------|---------------------|----------------------|--|
| GAMMA |                        |              |                      |                     |                      |  |
| WATTS | VOLTAGE                | COLOUR TEMP. | BEAM                 | FINISH              | OPTIONS              |  |
| LED80 | B - 120 - 277V*        | 4K - 4000K*  | T5M - TYPE 5 MEDIUM* | BLK-BLACK*          | DIM - 0-10V DIMMING* |  |
|       | C - 347V (Coming Soon) | 5K - 5000K   |                      | CC - CUSTOM COLOURS |                      |  |

\*Standard Configuration.