

The HLS-LED-2H twin head work-light replaces the traditional two headed quartz work-light. The heads are adjustable for precise aiming.



### APPLICATIONS

**Ideal for various indoor workspaces.**

| Project |  |
|---------|--|
| Type    |  |
| Date    |  |
| Notes   |  |

### SPECIFICATIONS

#### Construction

Heavy duty aluminum tubular frame with tripod stand. Frame and legs are made from extruded aluminum painted yellow. The center pole extends up to 67" high. Handle is made of durable rubber. The HLS-LED features two adjustable heads for precise aiming. LED head has a clear polycarbonate lens with an aluminum housing painted black.

#### LED configuration

36 LED chips with built in wide beam optics. LEDs have a colour temperature of 4000K and an operating temperature range of -40°C to +40°C.

#### Electrical

Total system wattage of the unit is 30W X2. The standard unit has a high efficiency driver that operates at 120V.


#### Finish

Yellow

|               |                        |
|---------------|------------------------|
| Equivalent to | <b>1,000W Quartz</b>   |
| Watts         | <b>30W X 2</b>         |
| Lumens        | <b>3,000 X2</b>        |
| Efficacy      | <b>100 lumens/watt</b> |

|                       |                         |
|-----------------------|-------------------------|
| LED Life              | <b>100,000 hours</b>    |
| Colour Temperature    | <b>4000K</b>            |
| Warranty              | <b>5 Years</b>          |
| Operating Temperature | <b>-40° C to +40° C</b> |
| Certification         | <b>cCSAus</b>           |

### DIMENSIONS

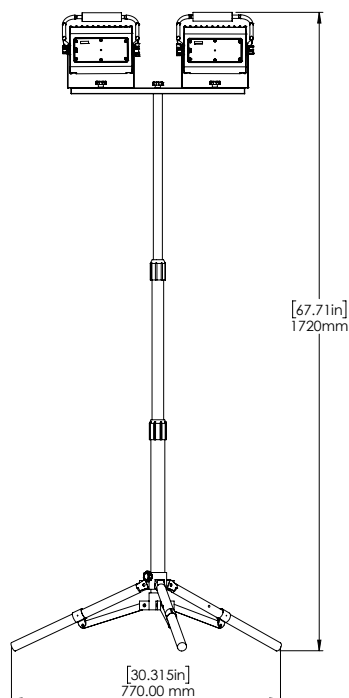

Adjustable heads  
for precise aiming



## ORDERING GUIDE

|            |   |              |                 |  |                    |  |                     |  |
|------------|---|--------------|-----------------|--|--------------------|--|---------------------|--|
| <b>HLS</b> | - | <b>LED60</b> | -               |  | -                  |  | -                   |  |
|            |   |              | <b>VOLTAGE</b>  |  | <b>COLOUR TEMP</b> |  | <b>FINISH</b>       |  |
|            |   |              | <b>A - 120*</b> |  | <b>4K - 4000K*</b> |  | <b>YLW- YELLOW*</b> |  |

\* Standard configuration