



# ORA1-LED15

LED Wall/Flood Light



## SPECIFICATIONS\*

Watts	16W
Lumens	1510
Efficacy	97lm/W
Replaces Up To	70W MH 300W Quartz
Colour Temp	4,000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 347V in wall mount
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	18.41
Power Factor	0.912
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



## DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

## APPLICATIONS



Town Houses



Condos



Perimeter  
Lighting



Shopping Malls




## FEATURES

- Elegant, sleek design with a modern look.
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.

\*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 2.


**NOTE:** Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

**DIMENSIONS**

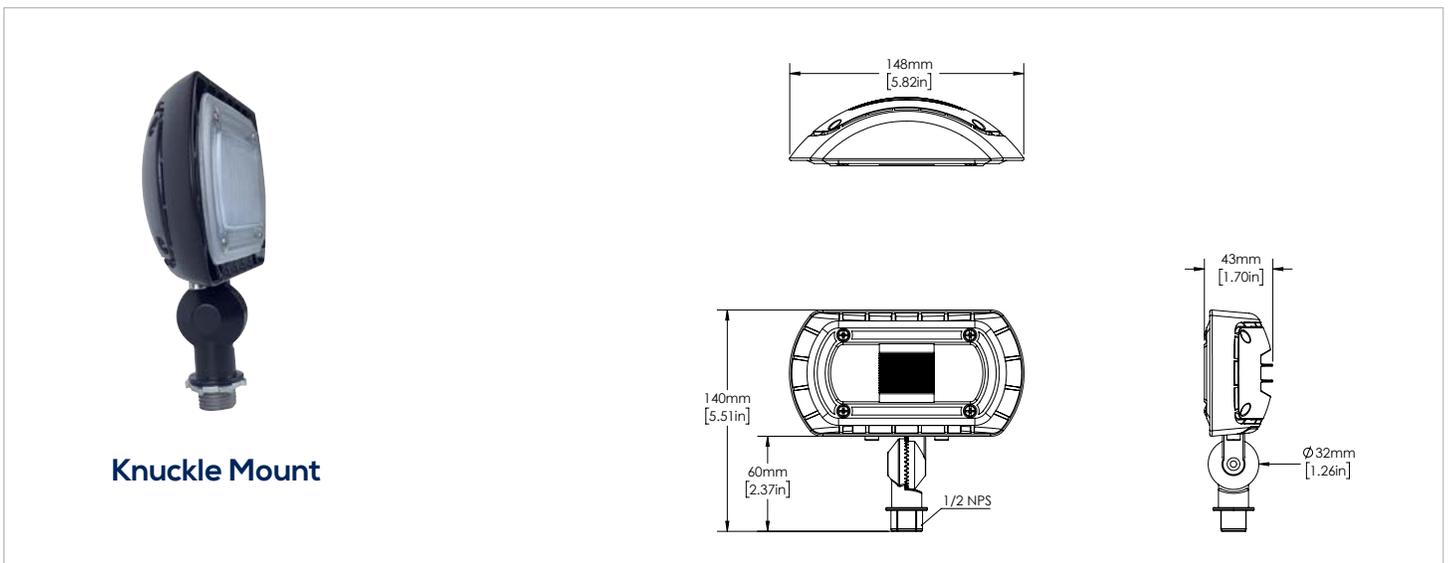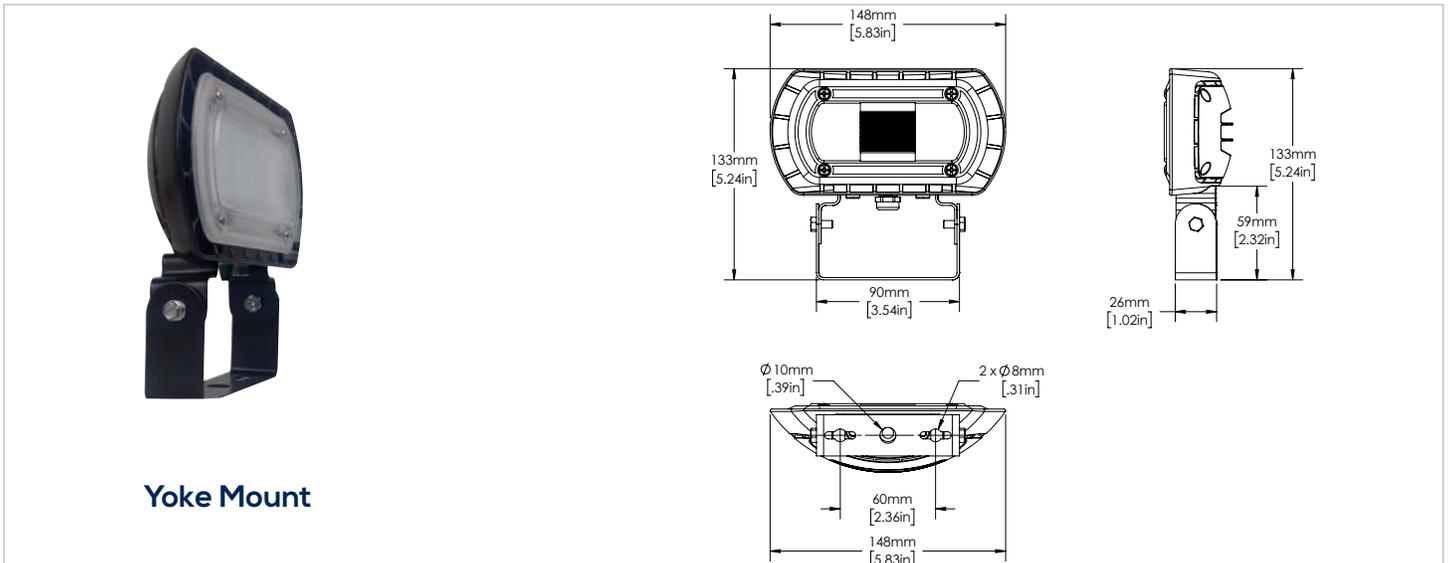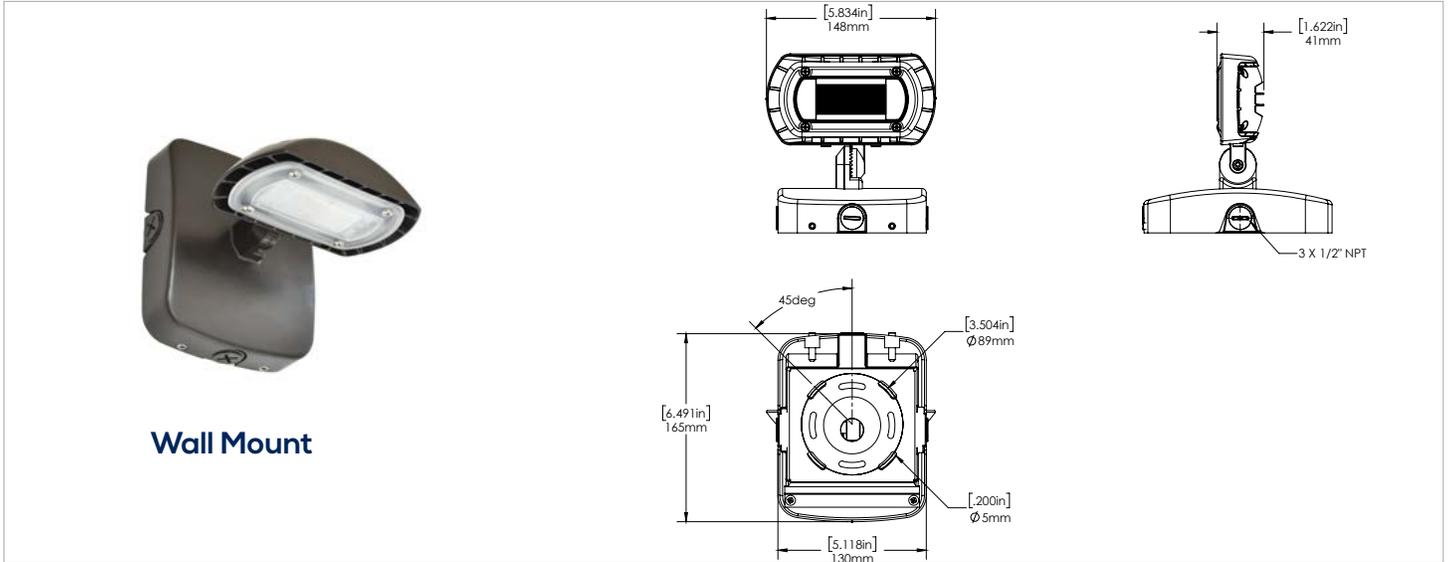


**PHOTOMETRICS**

ORA1-LED15 4K MOUNTED AT 8 FEET - WALL MOUNT ORIENTATION

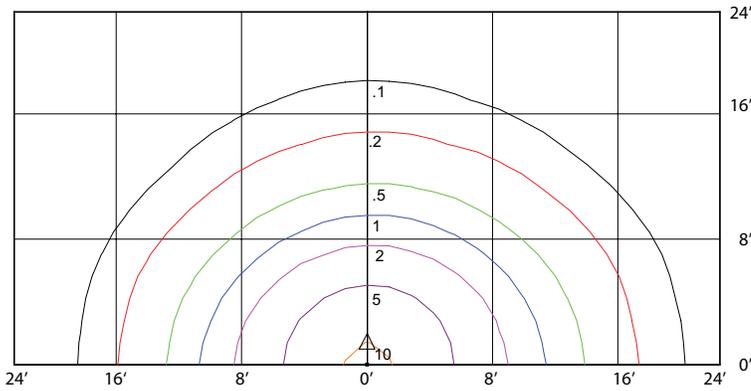


**ARCHITECTURAL WALL MOUNT**

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

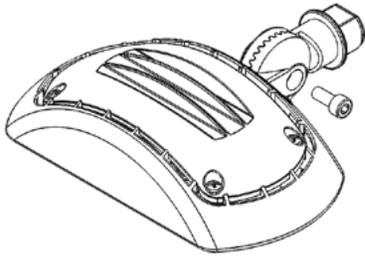

**Step One**




Remove screw from knuckle mount

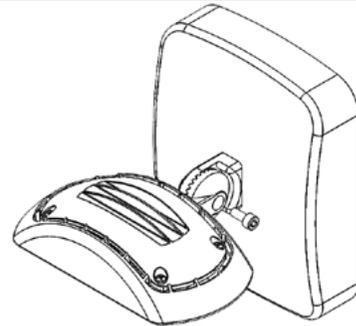

**Step Two**

Mount on bracket with wiring and tighten screw

**347V WALL MOUNT**

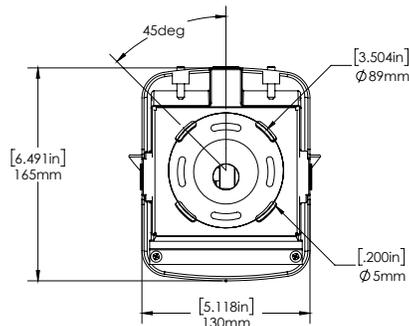

## SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF
ORA1-LED15-B-4K-XXX-XX	120-277	15.64	1509.9	97.15	18.41	0.912
ORA1-LED15-C-4K-XXX-XX	347	17.04	1771	103.93	18.26	0.9264

DLC listed as Outdoor Full-Cutoff Wall-Mounted Area Luminaire and as Architectural Flood and Spot Luminaires

### Legend

B- 120-277V, C-347V  
 4K - 4000K  
 XXX- Finish  
 XX- Mounting

## ORDERING GUIDE

<b>ORA1</b>					
<b>WATTS</b>	<b>VOLTAGE</b>	<b>COLOUR TEMP.</b>	<b>FINISH</b>	<b>MOUNTING</b>	
LED15	B - 120 - 277V*  C - 347V (Wall mount only)	4K - 4000K*	BRZ - BRONZE*	KN-Knuckle  YK - Yoke  WMC - Wall Mount with 3 conduit entries  WMCB - Wall Mount for 347V	

\* Standard configuration

## FIELD INSTALLED ACCESSORIES

### CHECK THE ACCESSORIES YOU WISH TO ORDER:

ORA1/2 WALL MOUNT with 3 Conduit Entries Bronze

ORA1/2 Architectural Wall Mount Bracket without  
conduit entries Bronze