



# ORA2-LED30

## LED WALL / FLOOD LIGHT



### SPECIFICATIONS\*

Watts	30W
Lumens	3359
Efficacy	112 lm/W
Replaces Up To	100W MH 500W Quartz
Colour Temp	4,000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 347V in wall mount
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	18.57%
Power Factor	0.9817
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



## DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

## APPLICATIONS



Town Houses



Condos



Perimeter Lighting



Shopping Malls




## FEATURES

- Elegant, sleek design with a modern look
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.

\*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 4.


**NOTE:** Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

**DIMENSIONS**

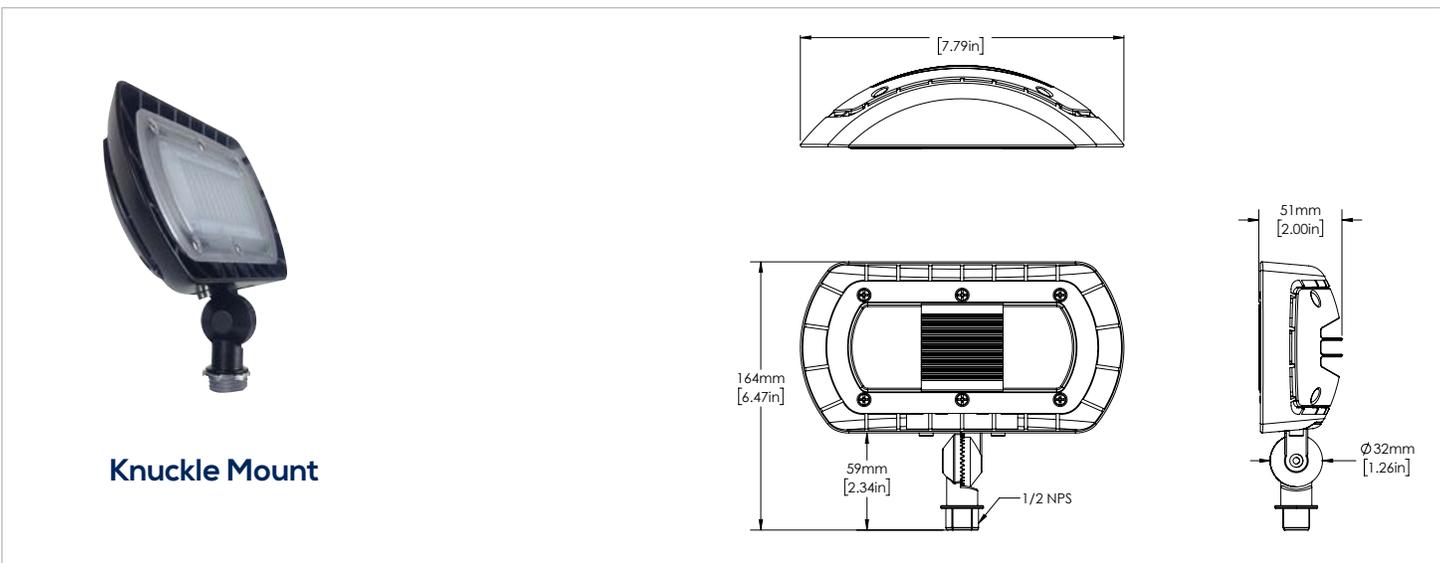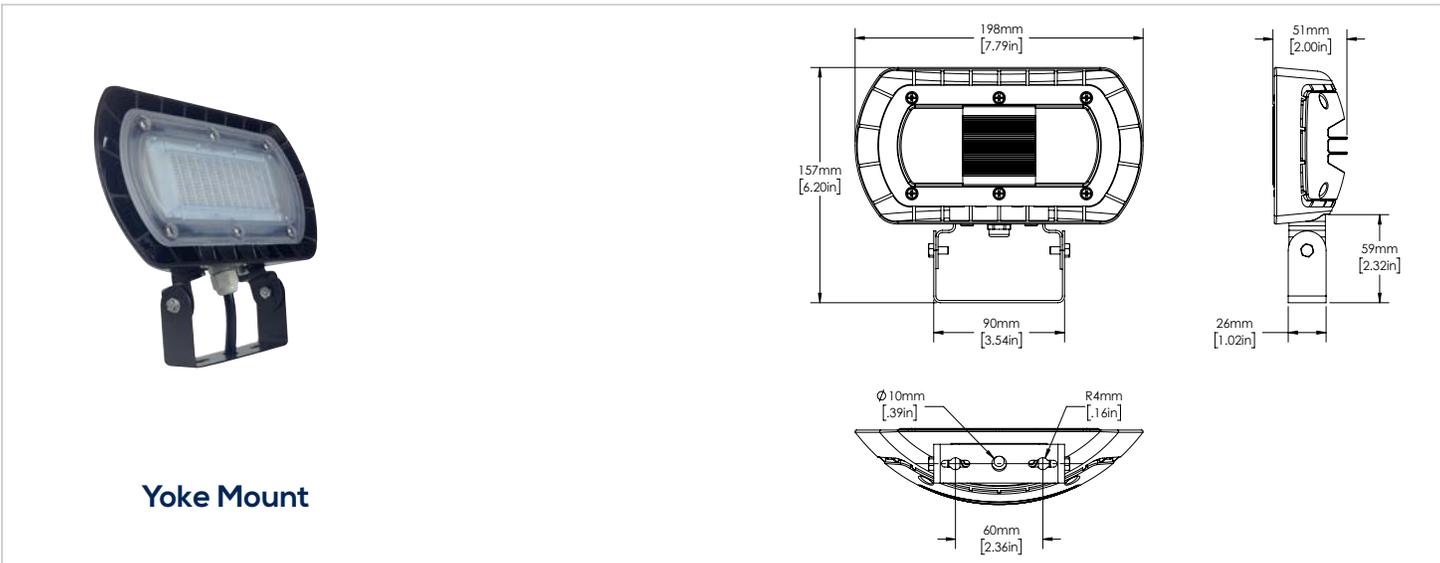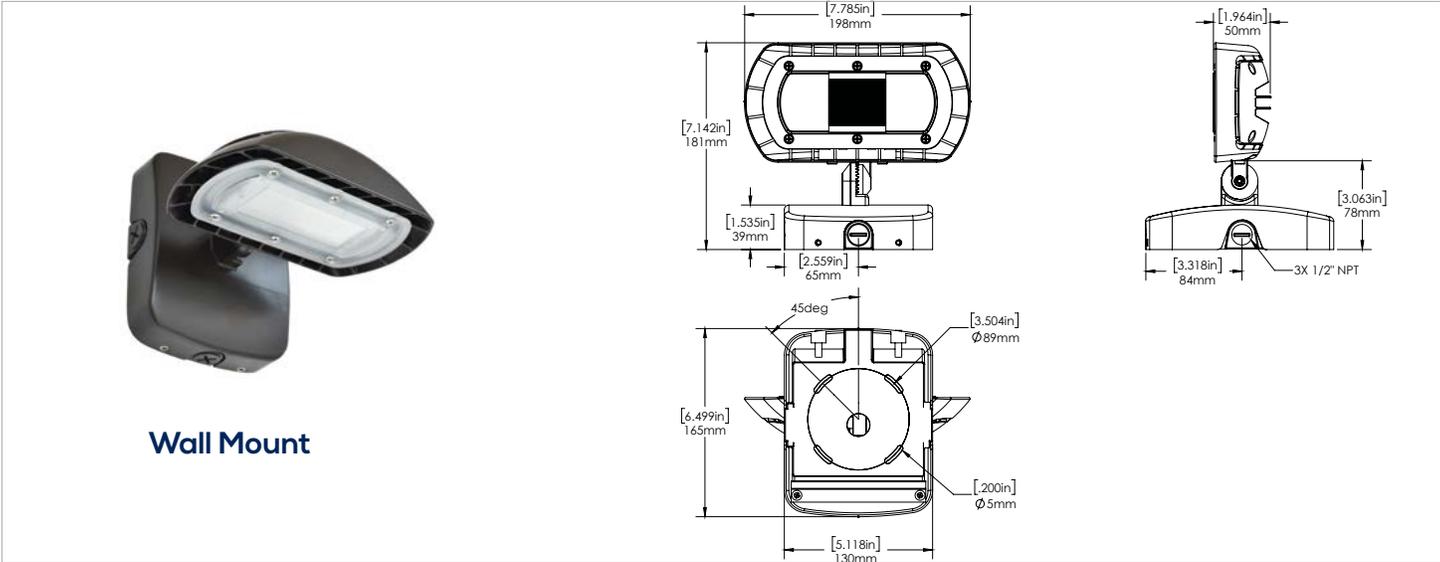


**PHOTOMETRICS**

**ORA2-LED30 4K MOUNTED AT 12 FEET - WALL MOUNT ORIENTATION**

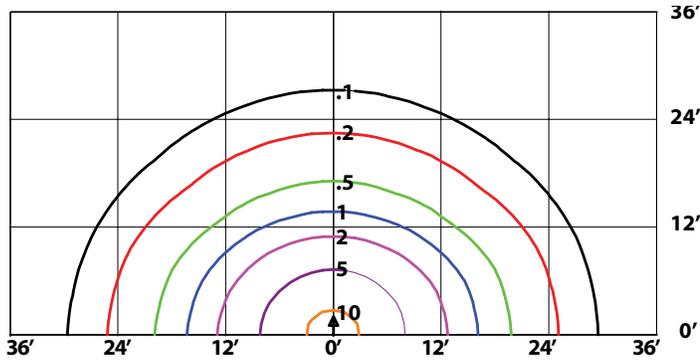


**ARCHITECTURAL WALL MOUNT**

For architectural wall mount version order ORA knuckle mount with architectural backbox separately

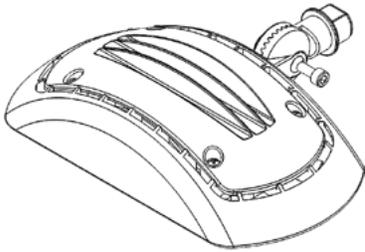

**Step One**


Remove screw from knuckle mount

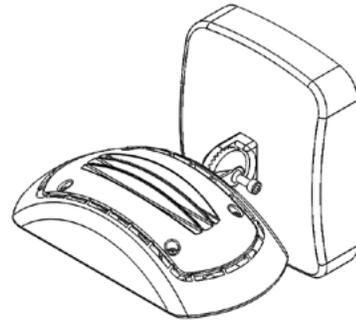

**Step Two**

Mount on bracket with wiring and tighten screw

**347V WALL MOUNT**

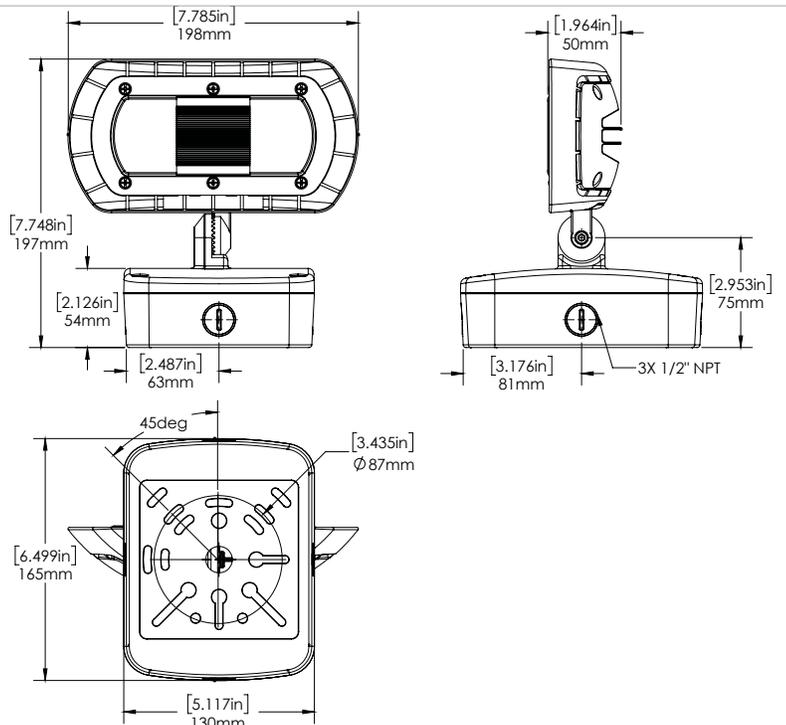

## SPECIFICATIONS

SPECIFICATIONS	VOLTAGE(V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD (%)	PF
ORA2-LED30-B-4K-XXX-XX	120-277	30.08	3358.6	111.66	18.57	0.9817
ORA2-LED30-C-4K-XXX-XX	347	34.37	3613	105.12	13.16	0.9545

DLC listed as Outdoor Full-Cutoff Wall-Mounted Area Luminaire and as Architectural Flood and Spot Luminaires

### Legend

B - 120-277V, C-347V

4K - 4000K

XXX- Finish

XX- Mounting

## ORDERING GUIDE

<b>ORA2</b>					
<b>WATTS</b>	<b>VOLTAGE</b>	<b>COLOUR TEMP.</b>	<b>FINISH</b>	<b>MOUNTING</b>	
LED30	B - 120 - 277V*  C-347V (Wall Mount Only)	4K - 4000K*	BRZ - BRONZE*	KN-Knuckle  YK - Yoke  WMC - Wall Mount with 3 conduit entries  WMCB - WALL mount for 347V	

\* Standard configuration

## FIELD INSTALLED ACCESSORIES

### CHECK THE ACCESSORIES YOU WISH TO ORDER:

ORA1/2 WALL MOUNT with 3 Conduit Entries Bronze

ORA1/2 Architectural Wall Mount Bracket without  
conduit entries Bronze