



The P8RIL Bollard is suitable for landscape and pathway lighting with glare free distribution.

### APPLICATIONS

The P8RIL Bollard is ideal for use in shopping malls and commercial real estate.

|                |  |
|----------------|--|
| <b>Project</b> |  |
| <b>Type</b>    |  |
| <b>Date</b>    |  |
| <b>Notes</b>   |  |

### SPECIFICATIONS

#### Construction

Lower body is 8" round extruded aluminum (.125 wall thickness) that fits over base and is secured with stainless steel screws. Body has a powder coat paint finish. Upper body is 8" round extruded aluminum that is held in place with stainless steel screws. For lamp replacement this section is removed. Upper body has a powder coat paint finish.

#### Top Cap

Cast aluminum held in place with stainless steel screws. Top cap has a powder coat paint finish. Upper reflector is secured to the top cap.

#### Optics

Internal louvers made of spun aluminum, anodized, type V distribution. Internal house shield is available as 90 or 180 degrees.

#### Lens

Clear acrylic.

#### Lamp

All units come complete with a clear lamp. For coated lamp please state coated.

#### Ballast

All ballasts for Metal Halide are Tri-Tap 120, 277, 347 volts for 50, 70 and 100 watts. High pressure sodium ballasts are available as 120 volts normal and high power factor and as Tri-Tap 120, 277, 347 volts in 50, 70, and 100 watts.

#### Socket

Medium base 4KV pulse-rated socket with a nickel-plated screw shell and a spring loaded centre contact.

#### Finish

Standard paint finishes are Bronze, Black and White, also available as brushed and anodized. Custom colours are available upon request.


#### Mounting

Cast aluminum base with four galvanized steel anchor bolts (1/2" X 12"). Lower body is secured to base with stainless steel screws.

#### Options

House side cut-off and tamper proof hardware,

### DIMENSIONS

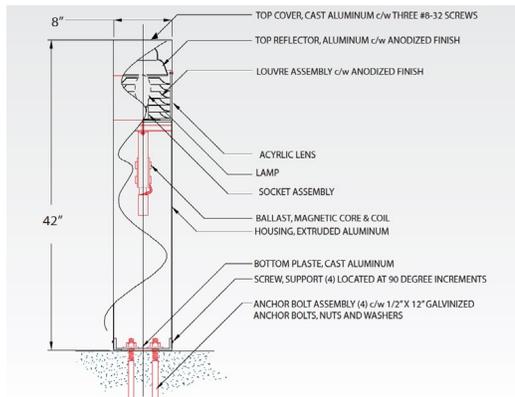

ORDERING GUIDE

|              |   |                     |   |                |   |                |   |                         |
|--------------|---|---------------------|---|----------------|---|----------------|---|-------------------------|
| <b>P8RIL</b> | - |                     | - |                | - |                | - |                         |
|              |   | <b>LAMP</b>         |   | <b>VOLTAGE</b> |   | <b>FINISH</b>  |   | <b>OPTIONS</b>          |
|              |   | 50 HPS              |   | 120 NPF*       |   | BRZ - BRONZE** |   | 90 - 90 DEGREE CUTOFF   |
|              |   | 70 HPS              |   | 120 HPS*       |   | BLK - BLACK**  |   | 180 - 180 DEGREE CUTOFF |
|              |   | 100 HPS             |   | 120            |   | WHT - WHITE**  |   | TP - TAMPER PROOF       |
|              |   | 50 MH               |   | 277            |   | BA - BRUSHED   |   | HARDWARE                |
|              |   | 70 MH               |   | 347            |   | AND ANODIZED   |   |                         |
|              |   | 100 MH              |   |                |   | CC - CUSTOM    |   |                         |
|              |   | CO - Coated<br>Lamp |   |                |   | COLOUR         |   |                         |

\* Only available with high pressure sodium lamps.

\*\* Standard finishes