



SMW2D-LED24

LED Surface Mount Wrap

SPECIFICATIONS*

| | |
|----------------------------|-----------------|
| Watts | 27.0 |
| Lumens | 2877.5 |
| Efficacy | 106.3 |
| Replaces Up To | 2' T8 lamp |
| Colour Temp | 4000K |
| Operating Temp | -25°C to +55°C |
| Voltage | 120-277* |
| LED Life | 50,000 hours |
| Certification | ETL Listed, DLC |
| Housing Material | Steel |
| Lens | Frosted |
| Power Factor | 0.91 |
| Total Harmonic Distortion | 9.9% |
| CRI | >80 |
| Weight | 2.2 lbs |
| Maximum Connected in a Row | 15 |



DESCRIPTION

The SMW2D-LED Surface Mount Wrap is a 2' linkable linear fixture ideal for indoor use. The wraparound fixture features an easy to use link connector ideal for combining multiple fixtures in one row.

APPLICATIONS



Stairwells



Hallways



Foyers



Utility Areas

FEATURES

- Easy to use link connector allows you to combine up to 15 fixtures in one row.
- Tabs on either end easily slide off to remove the lens for easy installation.
- DLC approved for energy rebates.

*The above specs apply to the standard product configuration - SMW2D-LED24-B-4K. For spec information on other product configurations please see page 2. **NOTE:** Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at www.designlights.org/qpl.

OTHER MODEL SPECIFICATIONS

| MODEL DESCRIPTION | VOLTAGE (V) | INPUT POWER (W) | LIGHT OUTPUT | EFFICACY (Lm/W) | THD | PF | CCT | CRI |
|-------------------------|-------------|-----------------|--------------|-----------------|-----|------|------|-----|
| SMW2D-LED24-B-4K-XXX-XX | 120-277 | 27.0 | 2877.5 | 106.3 | 9.9 | 0.91 | 3987 | 84 |

LEGEND


B - 120V-277V

4K - 4000K


XXX - HOUSING FINISH

FR - FROSTED LENS

DIMENSIONS

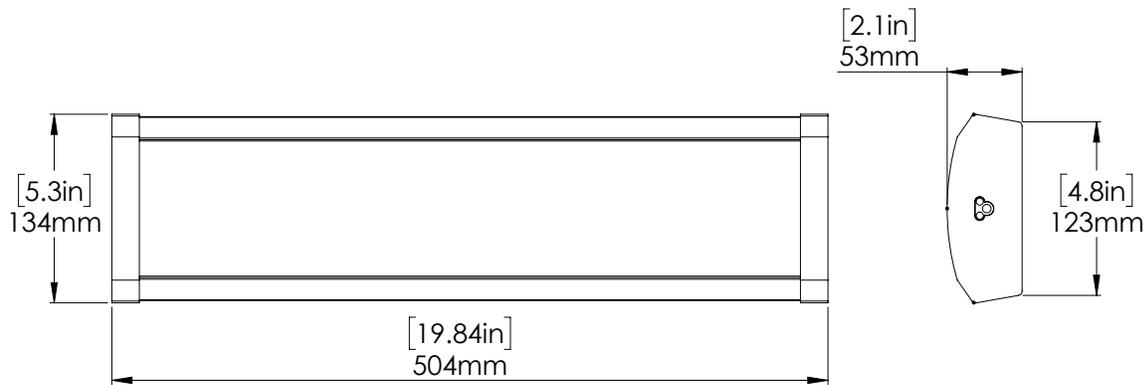

Knockouts On Back of the Fixture

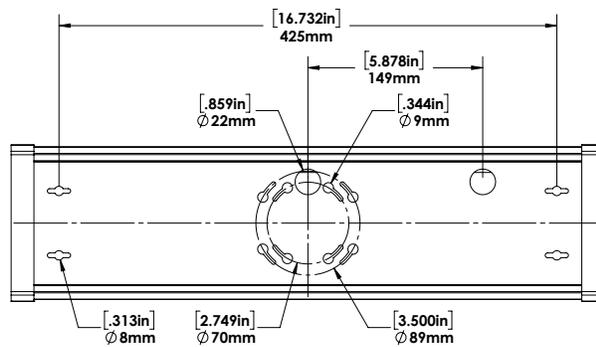

Weight = 2.2lbs

EASY WIRING TAB



Easy Installation

Clips on either end can be slid off allowing installer to easily remove the lens for ease of wiring and maintenance.

LINK CONNECTOR



Link Connector

The easy to use link connector fits into the end of the SMW2D-LED fixture and enables you to combine up to fifteen fixtures in a row.

(Fixture comes complete with link connector in the box)

ACCESSORIES (SOLD SEPARATELY)



Cord & Plug

5' cord and plug.



Interconnect

12" white interconnect cable.



Link Connector

Included with fixture, also sold separately.

ORDERING GUIDE

| | | | | | |
|--------------|--------------|-----------------|---------------------|---------------|--------------------|
| SMW2D | | | | | |
| | WATTS | VOLTAGE | COLOUR TEMP. | FINISH | LENS |
| | LED24 | B - 120 - 277V* | 4K - 4000K | WHT - WHITE* | FR - FROSTED LENS* |

*Standard Configuration.

Non Dimmable: Fixture should be used with non dimmable switches.

ACCESSORIES ORDERING GUIDE

CHECK THE ACCESSORIES YOU WISH TO ORDER:

CORD & PLUG - SMW-LED 5" CORD AND PLUG WHT

INTERCONNECT CABLE - SMW-LED 12" INTERCONNECT CABLE WHT

LINK CONNECTOR - SMW-LED LINK CONNECTOR