



PARK MASTER S7

The Park Master series is a rectangular area lighter and is an economical alternative to the sharp cutoff luminaires. The Park Master has a fabricated metal housing. The lens is hinged and gasketed for ease of lamp replacement. The Park Master is ideal for parking lots, driveways, roadways, small to medium shopping malls and office plazas.

FRAME All metal housing welded and with a powder coat paint finish.

LENS FRAME Metal lens frame welded and gasketed with clear tempered safety glass. The Lens frame assembly is hinged and held in place with two stainless steel set screws.

REFLECTOR Hydro-formed semi-specular finish type III distribution.

BALLAST High Pressure Sodium 70, 100 and 150 watts are available as a dedicated 120 volts in normal and high power factor or Tri-tap, 250 and 400 watt are Tri-tap 120, 277 and 347 volts. For Metal Halide the following wattages are available as Tri-tap 70, 100, 150, 175, 250 and 400 watts. Certain wattages are available with a 120/208/240 CWI ballast.

LAMPS All units shipped complete with lamp.



SOCKET 4KV pulse-rated porcelain with a nickel-plated screw shell and a spring-loaded centre contact.

MOUNTING Arm mounted on square poles. Available with the following arms 6" and 12".

HARDWARE All external hardware is stainless steel to ensure corrosion-free protection against the elements

FINISH Standard finishes are Bronze and Black in a powder coat finish. For Custom colours please consult factory.



www.rabdesign.ca

S7

70HPS 100HPS 150HPS
250HPS 400HPS
70MH 100MH 150MH 175MH
250MH 400MH

LAMP

VOLTAGE

120NPF* 120HPF*
120 277 347
208CW|** 240CW|**


ARM

ASA6 - 6" ARM
ASA12 - 12" ARM

FINISH

BRZ - BRONZE
BLK - BLACK
CC - CUSTOM COLOUR

Dimensions

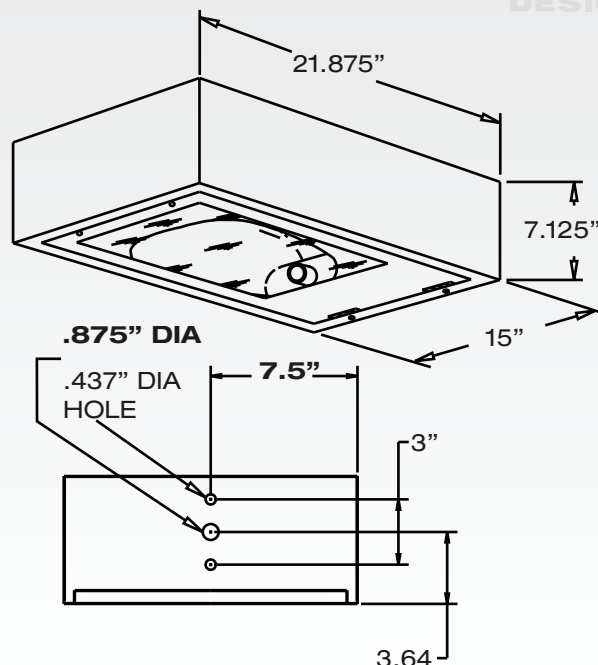

ARM DRILLING PATTERN

[illegible]

Mounting Height = 20 Feet. Each box represents one mounting height.
+ = Point of max candela

Mounting Height	Multiplier
10	4.000
15	1.778
20	1.000
25	0.640
30	0.444
35	0.327
40	0.250
45	0.198
50	0.160