



SKYLINE-LED40

LED Area Light



SKYLINE-PT3A
3 Arm Post Top



SKYLINE-PT1A
Curved Arm
Post Top



SKYLINE-PLM
Pole Mount Arm
For Round or
Square Poles

SPECIFICATIONS*

Watts	35
Lumens	3395
Efficacy	96 lm/W
Replaces Up To	150W MH
Colour Temp	5000K, 4000K*
Operating Temp	-40°C to +40°C
Voltage	120-277V* 347V (coming soon)
LED Life	50,000 hours
Certification	cETLus
Housing Material	Die Cast Aluminum
Lens	Clear Glass
Power Factor	0.9
Total Harmonic Distortion	9%
CRI	72
Accessories	Photocell



DESCRIPTION

SKYLINE is an architectural post top area light featuring a modern, European look. Intelligently designed, this fixture provides advanced optics available with T2, T3, T4, T5 options.

APPLICATIONS



Condos



Pathways



Commercial
Properties


FEATURES

- Sleek modern design.
- Mounting options include traditional 3 arm post top, stylish curved arm with post top, and the elegant pole mount arm for round or square poles.
- Photocell is optional.
- 10kV surge protection is standard.
- Advanced optics available with T2, T3, T4, T5 options.

*The above specs apply to the standard product configuration - SKY-LED40-B-4K-T5-BLK-DIM. For spec information on other product configurations please see page 2.


DIMENSIONS

SKYLINE-PT3A

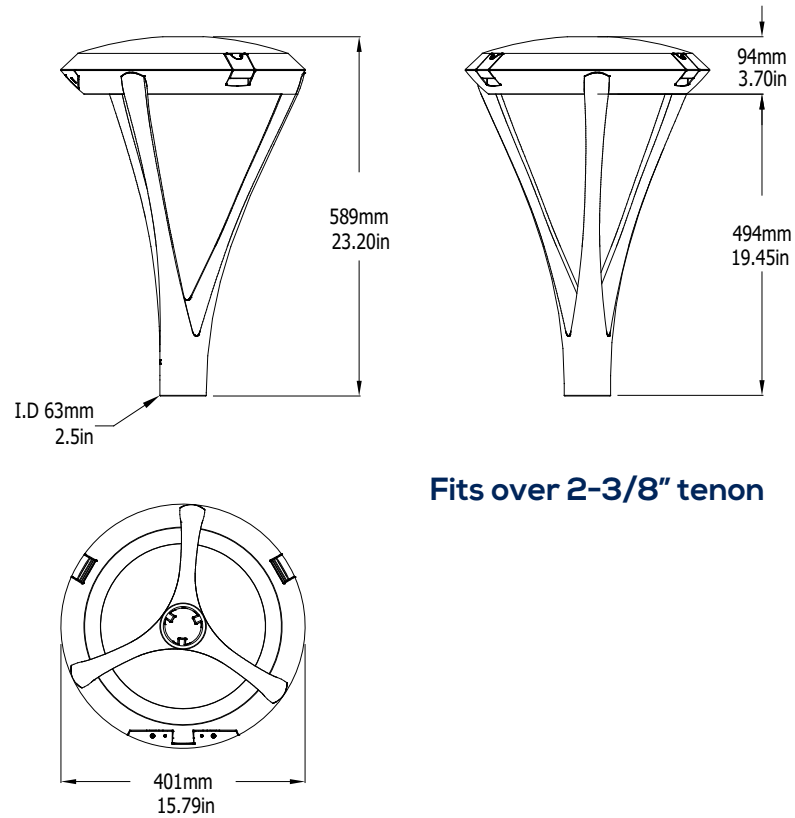

Fits over 2-3/8" tenon

SKYLINE-PT1A

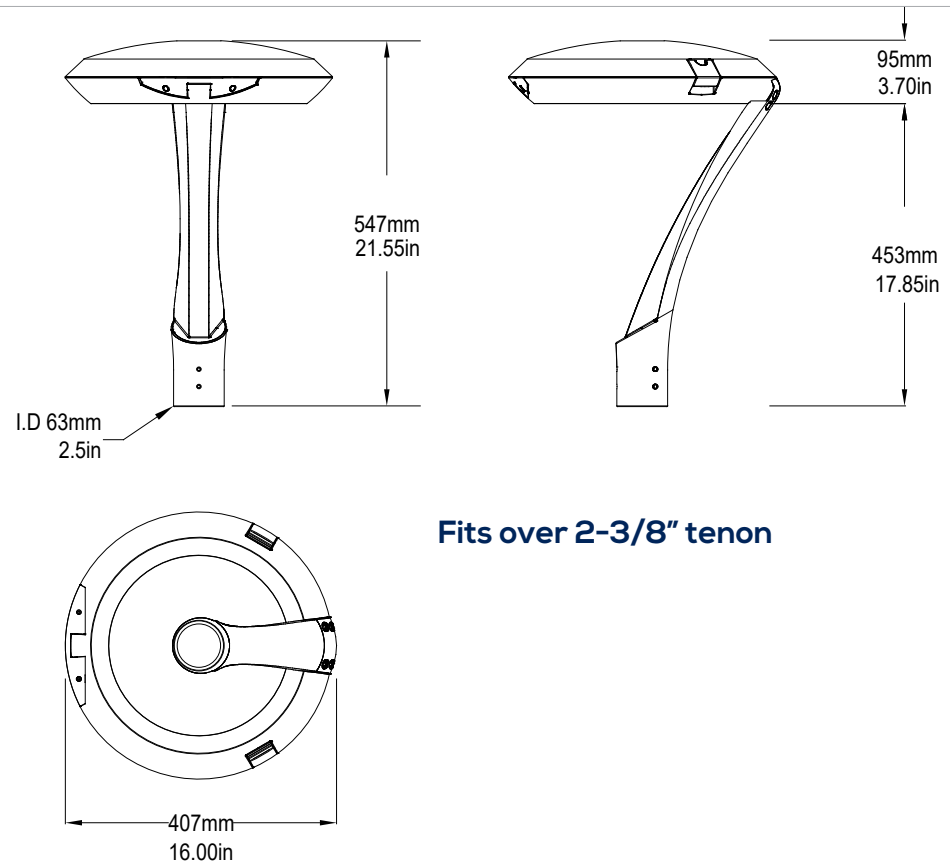





Fits over 2-3/8" tenon

Technical drawings of the SKYLINE-PLM lighting fixture showing dimensions in millimeters (mm) and inches (in).

- Side View (Left):**
 - Length: 526mm (20.71in)
 - Height: 244mm (9.60in)
- Top View (Right):**
 - Width: 94mm (3.70in)
 - Depth: 150mm (5.90in)
- Front View (Bottom Left):**
 - Width: 401mm (15.79in)
- Detail View (Bottom Right):**
 - Top diameter: 10mm DIA (0.39in)
 - Bottom diameter: 19mm DIA (0.75in)
 - Height: 89mm (3.50in)
 - Width: 42mm (1.65in)

		EPA
	SKYLINE-PT1A	0.93
	SKYLINE-PT3A	1.17
	SKYLINE-PLM	0.66

POLE ADAPTOR

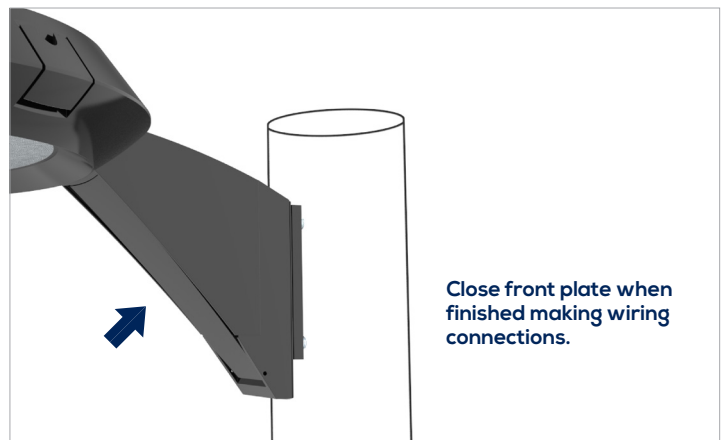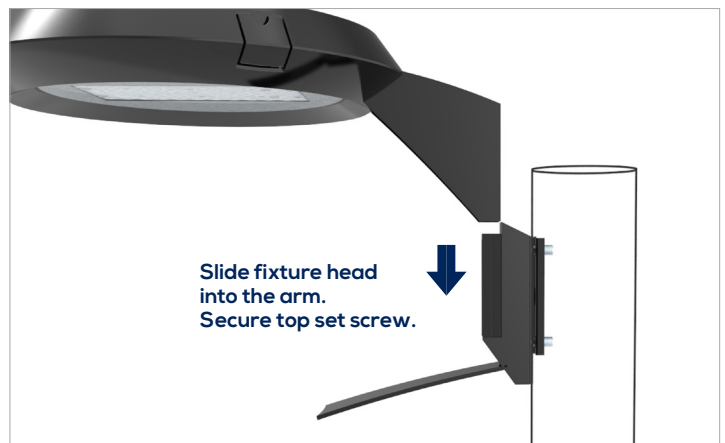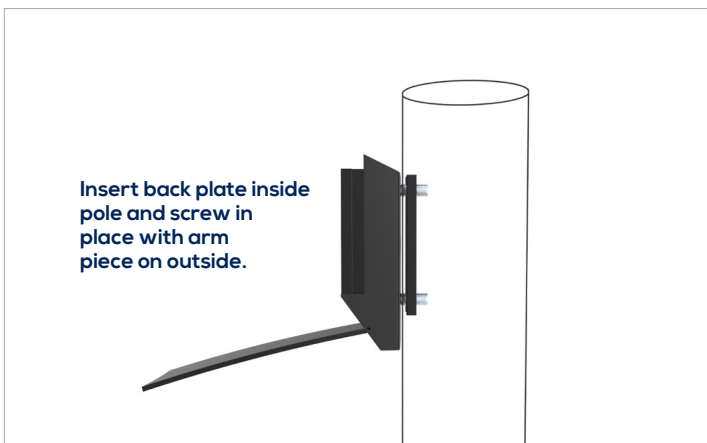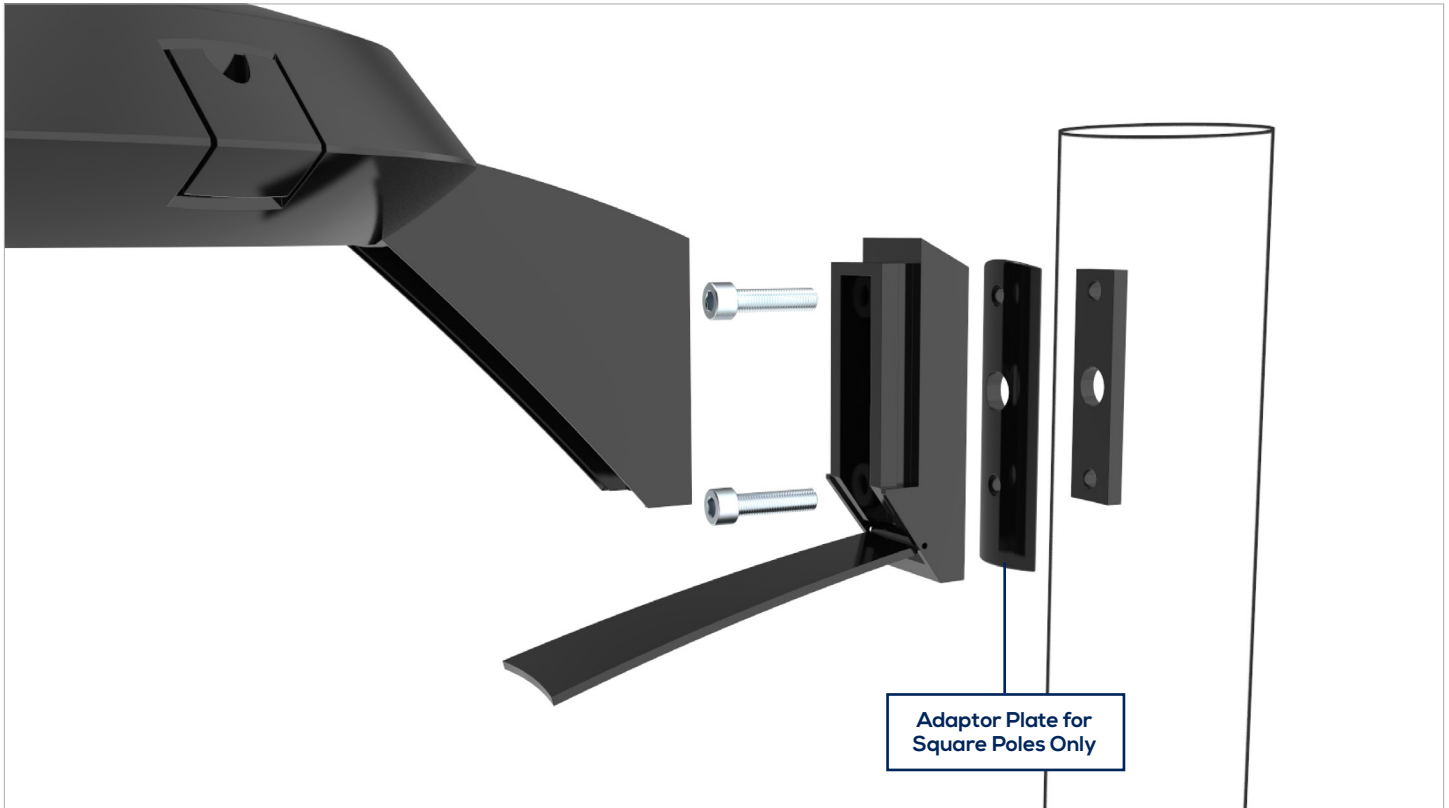

OTHER MODEL SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT	CRI
SKY-LED40-B-4K-XX-XXX-DIM-[PT1A,PT3A,PLM]	120-277	34.64	3338.3	96.36	8	0.9	4000	72
SKY-LED40-B-5K-XX-XXX-DIM-[PT1A,PT3A,PLM]	120-277	34.64	3338.3	96.36	8	0.9	5000	72

LEGEND

- B - 120V-277V,
- 4K - 4000K, 5K - 5000K
- XX- BEAM TYPE
- XXX - HOUSING FINISH
- DIM - 0-10V DIMMING
- PT1A - POST TOP MOUNT WITH CURVED ARM
- PT3A - POST TOP MOUNT WITH 3 ARMS
- PLM - POLE MOUNT

ORDERING GUIDE

SKY

WATTS	VOLTAGE	COLOUR TEMP.	BEAM	FINISH	DIMMING
LED40	B - 120 - 277V*	4K - 4000K*	T5 - TYPE 5*	BLK-BLACK*	DIM - 0-10V* DIMMING
		5K - 5000K	T4 - TYPE 4	CC-CUSTOM COLOURS	
			T3 - TYPE 3		
			T2 - TYPE 2		

MOUNTING	OPTIONS
PT3A - POST TOP MOUNT WITH 3 ARMS	PC - Photocell
PT1A - POST TOP MOUNT WITH CURVED ARM	
PLM - POLE MOUNT ARM FOR ROUND or SQUARE POLES	

*Standard Configuration.