

The WL-LED15 is an energy efficient wall light for outdoor use that replaces up to a 70W HPS fixture.



APPLICATIONS

Ideal for a variety of outdoor applications such as entrances, backdoors, mandors, walkways and aisles.

| | |
|----------------|--|
| Project | |
| Type | |
| Date | |
| Notes | |

SPECIFICATIONS

Construction

Die cast aluminum housing and frame with a clear lens and specular reflector. The WL-LED15 has a chip and fade resistant polyester powder coat paint finish.

LED Configuration

The fixture contains one high efficiency chip on board (COB) that delivers a total lumen output of 1,274 lumens at an efficiency of 83 lumens/watt.

Electrical

Total system wattage of the unit is 15W. The standard unit has a high efficiency driver that operates at 120 - 277V. 347 is available as an option with back box only.

Options

- Backbox for surface or flush mounting using conduit.
- Photocell (factory installed)


Finish

Bronze, White, Black


| | |
|----------------------|-----------------------|
| Fixture Watts | 15W |
| Lumens | 1,274 |
| Efficacy | 83 lumens/watt |

| | |
|----------------------------------|---|
| LED Life | 100,000 hours |
| Colour Temperature | 4000K (standard) 3000K (option) 5000K (option) |
| Warranty | 5 Years |
| Operating temperature | -40°C to +40°C |
| CRI | >80 |
| Total Harmonic Distortion | <20% |
| Power Factor | 0.99 |

DIMENSIONS

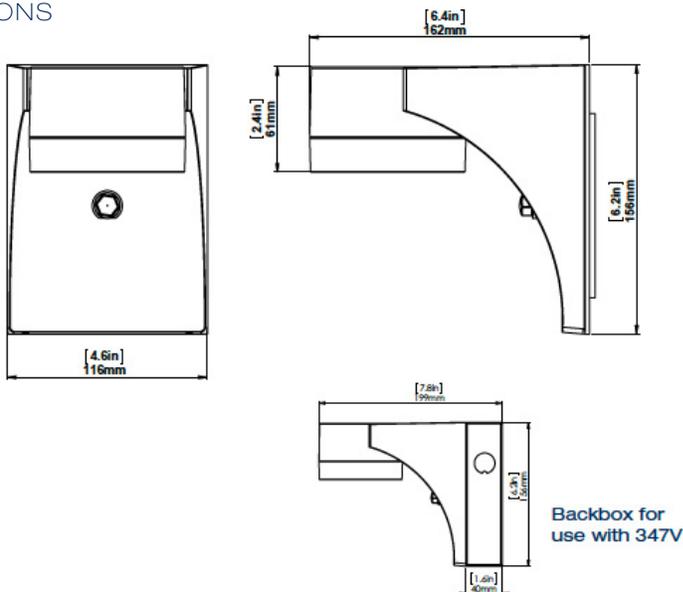

ORDERING GUIDE



VOLTAGE

- B - 120 - 277V***
- C - 347**
- A - 120V**

COLOUR TEMP

- 4K - 4000K***
- 5K - 5000K**
- 3K - 3000K**

FINISH

- BRZ - BRONZE***
- WHT - WHITE**
- BLK - BLACK**

OPTIONS

- BB - BACK BOX***
- PC - PHOTOCCELL**

* Standard configuration

** For use with 347V