

RENO LED 1x4 Back-Lit Panel (ECO) (Multi CCT/Wattage)



FEATURES

- Recessed, surface mount or suspended installation
120-347V circuit and 0-10V dimming control compatible
- Low glare technology UGR <19, PF >0.95, 125Lm/W
120° Beam spread, CRI >83
- Recessed, surface mount or suspended installation
PF >0.95, UP TO 115Lm/W
- Multi CCT/Wattage
- Temperature Rating : -22°F/-30°C - 104°F/40°C
- Rated Lifetime L70(hrs) : >70,000
- 7-year warranty

SPECIFICATION

- Great for remodel and new construction
- The Contemporary design of center basket LED Improves and upgrades your spaces
- Adjustable multi-color/Wattage dip switch on the driver that allows you to change the CCT/Wattage according to your project's needs
- Easily installed with maximum energy savings
- Applications: Offices, Schools & Meeting Rooms

SPECIFICATION

ORDER #	MODEL#	WATTS	DIMMABLE	VOLTS	BEAM ANGLE	INITIAL LUMENS	CCT	CRI
R35301	RENO-14BLPL-UNV-347-MWMCCT-ECO	15/19/ 24/29W	0-10 VDC	120-347V	120°	1725/2185/ 2760/3335	3500/4000 5000K	83+

*Suitable for Damp locations. Not for use where directly exposed to weather or water

ACCESSORY INFORMATION

MODEL	PRODUCT	DESCRIPTION
R39201	RENO-SMK14	1"X 4" Surface Mount Frame
R39204	RENO-RP	70.9" (1.8mm) Aircraft Suspension Cable (set of 6 cables for 1 1"x 4" fixture)




Date:

Type:

Project Name:

Part Number:

DIMENSION


PART NUMBER : RENO-14BLPL-UNV/347-MWMCCT-ECO
DIMENSION: 11.9\"(W) X 47.8\"(L) X 1.85\"(H)


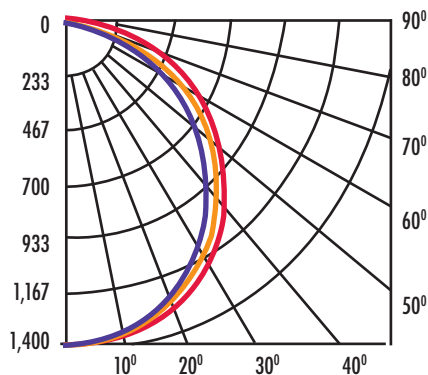
LUMINOUS EMITTANCE

ZONAL LUMENS SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0-30	1,025.9	19.2	26.1
0-40	1,686.0	31.5	42.9
0-60	3,009.9	56.2	76.7
60-90	916.8	17.1	23.3
0-90	3,926.7	73.3	100.0

LUMENS PER ZONE

Zone	Lumens	%Total
0-10	124.9	3.2
10-20	356.0	9.1
20-30	544.9	13.9
30-40	660.1	16.8
40-50	689.8	17.6
50-60	634.2	16.2
60-70	495.2	12.6
70-80	305.5	7.8
80-90	116.1	3.0


■ 0° H ■ 90° H ■ 45° H

FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%):	72.1	3,864.3	164.9	1675
Beam (50%):	52.9	2,832.9	114.7	1140
Total:	73.3	3,925.4		



905-604-4666



info@renolighting.com



www.renolighting.com