


Date:	Project Name:	
Туре:	Part Number:	





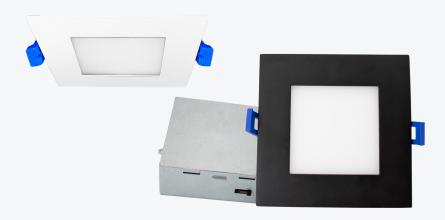

# BRILLIANCE SERIES

# LED SLIM SQUARE DOWNLIGHT

### DESCRIPTION

The RENO Lighting's LED 12W Slim Downlight combines a sleek design with a small aperture without any compromise to the light output. With up to 800 lumens and a CRI of 90, this small downlight provides an outstanding performance that will suit both residential and commercial applications.

#### **FEATURES**

- IC-Rated and Air-Tight ready and may be in direct contact with insulation
- May be installed in drywall or suspended ceilings
- Multi CCT
- CRI >90
- Edge-lit technology, no glare or dark spots, instant-on
- Flicker-free 120V forward-phase triac dimming down to 5%
- Energy-Star, JA8 compliant
- Operating temperature: -4°F to +104°F (-20°C to +40°C)
- Rated Lifetime L70(hrs): >50,000
- 5 year warranty

#### **APPLICATIONS**



Residential Ceiling



Commercial Lighting



Hotel lobby

























Date:	Project Name:
Туре:	Part Number:

## **SPECIFICATION**

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BEAM ANGLE	CCT (K)	COLOR
R36017	RENO-4-S12W-MCCT-WH-SQ	12W	4"	120V	800lm	120°	2700/3000/3500/ 4000/5000K	WHT
R36018	RENO-4-S12W-5CCT-BK-SQ	12W	4"	120V	800lm	120°	2700/3000/3500/ 4000/5000K	BLK

## **ACCESSORIES**

ORDER#	MODEL#	DESCRIPTION
R39107	RENO-MC-123	Pre-Mounting New Construction Plate
R39108	RENO-MP4	Mounting Plate without clip



**RENO-MP4** 



RENO-MC-123






Date:	Project Name:
Туре:	Part Number:

## **DIMENSIONS**

### **SQUARE**

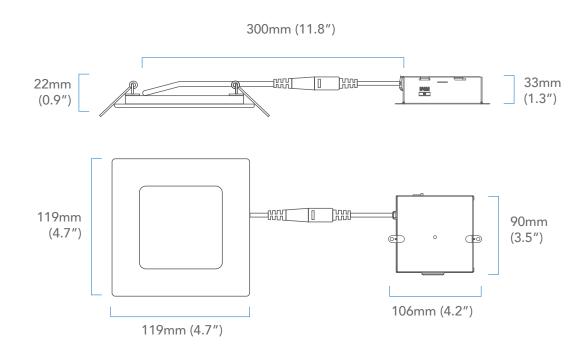

\*NOTE: Width in ceiling needed for the driver to fit is 3" Cut hole size 4-1/4" (108mm)





REV.08/28/24