


## FLARE SERIES

### LED SLIM CANOPY



Plug-in Dimming Sensor/Photocell

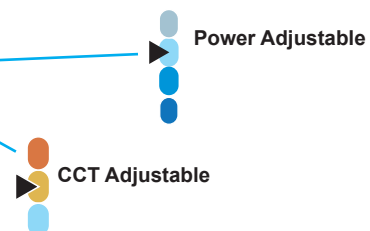

#### DESCRIPTION

Quick to install, the RENO LED Slim Canopy is the ideal retrofit solution for 70-250W HID garage and canopy luminaires. DLC listed and ETL for wet locations with a rating of IP65. Integrated with our newest selectable CCT and wattage for your convenience. Aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens.

#### FEATURES

- DLC Listed
- Aluminum Alloy & PC Material
- High and stable lumen output
- Dual Wide Voltage 120-347V
- Elegant and Efficient design
- Easy Installation & Maintenance
- 70,000 hours lifespan or 10-year Limited Warranty
- Selectable CCT 3000K/4000K/5000K
- Selectable Wattage
- White Housing

#### APPLICATIONS


- Parking Garage
- Gas Station

#### SPECIFICATION

ORDER #	MODEL #	WATTS	VOLTAGE(V)	HOURLY RATING	EFFICACY (lm/w)	BEAM ANGLE	CCT(K)
R52013	RENO-CP-40W-MW-DV-MCCT-R1	25/30/35/40W	120-347V	70,000	130 lm/w	140°	3000K/4000K/5000K
R52014	RENO-CP-75W-MW-DV-MCCT-R2	45/55/65/75W	120-347V	70,000	130 lm/w	140°	3000K/4000K/5000K
R71001	RENO-SENSOR-MW-S	Dimming Microwave Sensor for CANOPY FIXTURE					
R72001	RENO-SENSOR-PC-S	Photocell Sensor for CANOPY FIXTURE					
R73001	RENO-REMOTE-S	CONTROLLER FOR BI-LEVEL SENSOR					




## DIMENSION

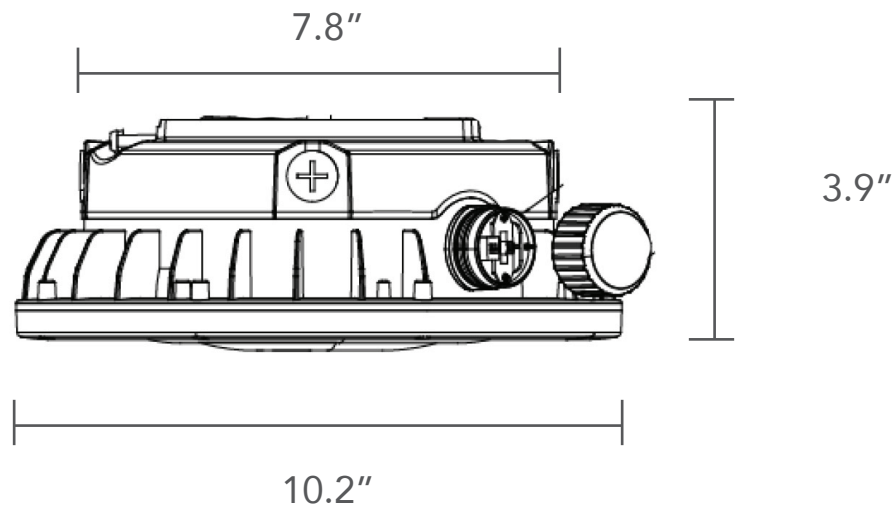

## LUMINOUS EMITTANCE

40W

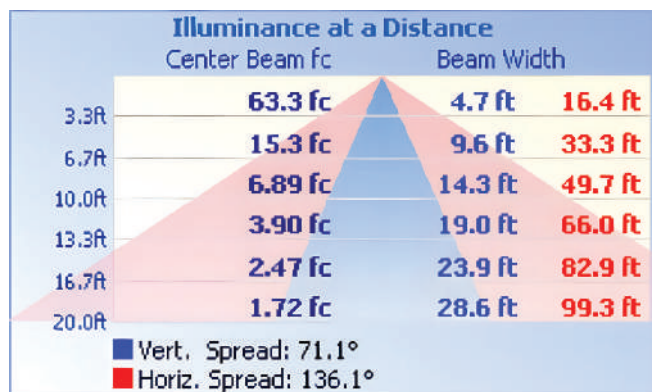

75W

