

ZETA SERIES

Multifunctional Commercial Downlight



FEATURES

- Dual Voltage : 120-347V
- Selectable CCT
- Selectable Wattages
- Suitable for Type-IC on models: 4" , 6" , & 8"
- External spring arms install to mounting surface without the need for a traditional recessed can
- Minimum projected L70 @ 86,000 hours = (per IES TM21)
- 0-10V Dimming
- Operating temperature: -25C-45°C

DESCRIPTION

RENO Multifunctional Commercial Downlight

is a commercial grade downlight fixture.

This Energy Star qualified downlight with integrated driver, Designed as an energy efficient lighting solution for the Commercial's popular 4" / 6" / 8" / 10" recessed downlight fixtures. Come with Dual Voltage 120-347V and easy installation with adjustable wattages and colour temperature.

APPLICATIONS

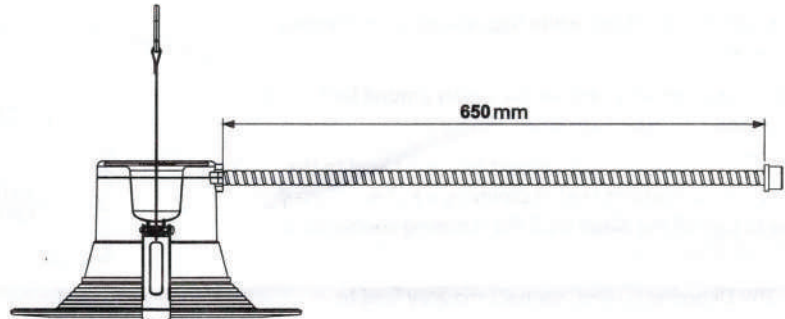
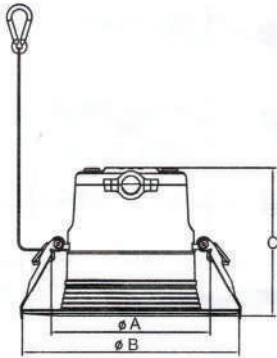
- Office Lighting
- Commercial Applications
- Damp location rated

SPECIFICATION

ORDER #	MODEL#	WATTS	LUMENS OUTPUT	CCT	SIZE	BEAM ANGLE
R39205	RENO-DL4-MW-DV-MCCT-G2	9/13/18W	1000/1500/2000LM	27/30/35/40/50K	4"	95°
R39206	RENO-DL6-MW-DV-MCCT-G2	13/19/27W	1500/2000/3000LM	27/30/35/40/50K	6"	95°
R39207	RENO-DL8-MW-DV-MCCT-G2	18/27/36W	2000/3000/4000LM	27/30/35/40/50K	8"	95°
R39208	RENO-DL10-MW-DV-MCCT-G2	22/34/45W	2500/3750/5000LM	27/30/35/40/50K	10"	95°

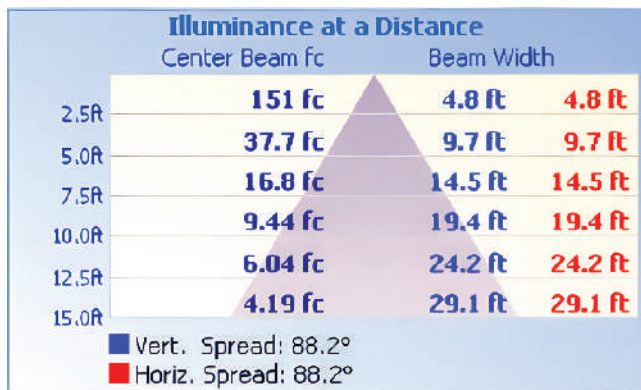
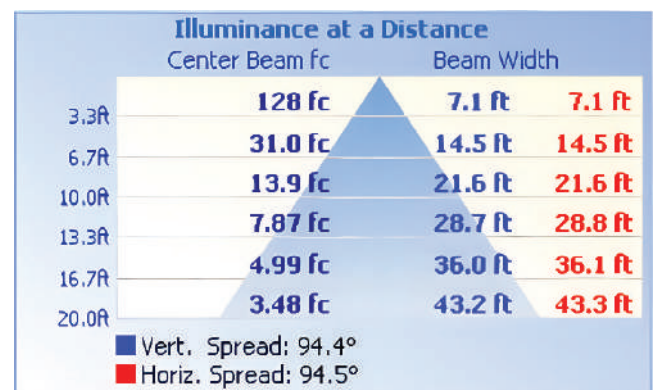
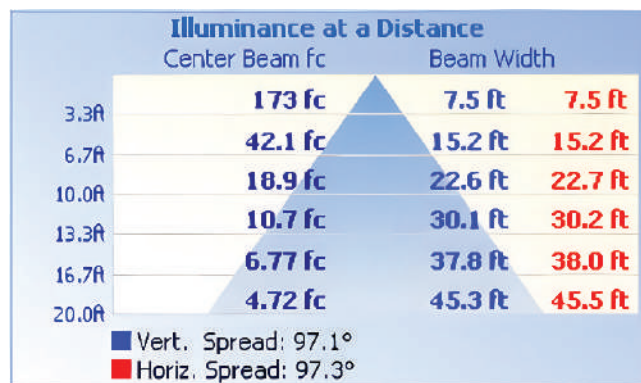


DIMENSION



Model	A	B	C	Min. Cutout	Max. Cutout
4"	4.33"	5.91"	4.02"	4.33"	5.51"
6"	5.91"	8.27"	4.41"	5.91"	7.48"
8"	7.48"	10.24"	4.76"	7.48"	9.45"
10"	8.27"	11.22"	4.76"	8.27"	10.24"

LUMINOUS EMITTANCE

9/13/18W

13/19/27W

18/27/36W

22/34/45W
