

Multifunctional Commercial Downlight



SELECTABLE CCT & WATTAGE



DESCRIPTION

RENO Multifunctional Commercial Downlight

is a commercial grade downlight fixture.

This Energy Star qualified downlight with integrated driver, Designed as an energy efficient lighting solution for the Commercial's popular 4" / 6" / 8" / 10" recessed downlight fixtures. Come with Dual Voltage 120-347V and easy installation with adjustable wattages and colour temperature.

FEATURES

- Dual Voltage : 120-347V
- Selectable CCT for all models with 3000K, 3500K & 4000K
- Selectable Wattages
- Suitable for Type-IC on models: 4", 6", & 8"
- External spring arms install to mounting surface without the need for a traditional recessed can
- Minimum projected L70 @ 86,000 hours = (per IES TM21)
- 0-10V Dimming
- Operating temperature: -25C-45°C

APPLICATIONS


- Office Lighting
- Commercial Applications
- Damp location rated

SPECIFICATION

ORDER #	MODEL#	LUMENS OUTPUT	BEAM ANGLE	WATTS	VOLTS	SIZE	CCT	CRI
R36201	RENO-DL4-MW-DV-MCCT	920lm	95°	12W	120-347V	4"	3000/3500/4000K	93
R36202	RENO-DL6-MW-DV-MCCT	800/1000/1400lm	95°	10W/12W/17W	120-347V	6"	3000/3500/4000K	93
R36203	RENO-DL8-MW-DV-MCCT-H	1200/1450/1750lm	95°	14W/17W/20W	120-347V	8"	3000/3500/4000K	83
R36204	RENO-DL9.5-MW-DV-MCCT	2300/2700/3150lm	95°	30W/35W/40W	120-347V	10"	3000/3500/4000K	93



DIMENSION

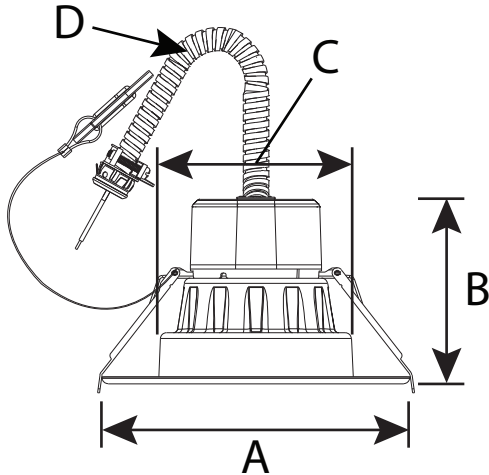


RENO DOWNLIGHT


DESCRIPTION :	DIMENSION	4"	6"	8"	10"
FRONT DIAMETER	A	5.8"	8.3"	10.2"	11.2"
OVERALL HEIGHT	B	3.7"	4.0"	4.3"	4.6"
CONDUIT DIAMETER	C	3.6"	5.8"	7.2"	8.2"
CONDUIT LENGTH	D	24"	24"	24"	24"

LUMINOUS EMITTANCE


12W

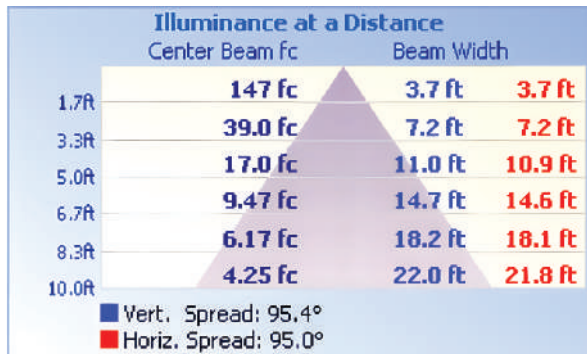

17W

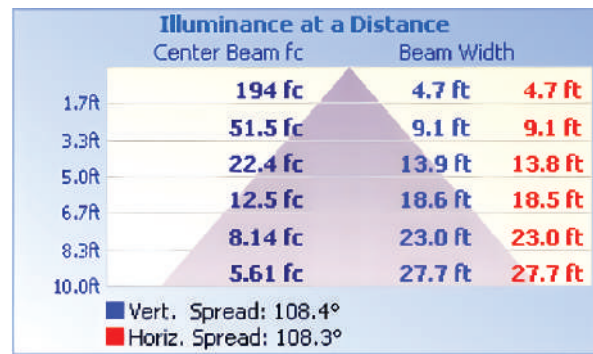

20W

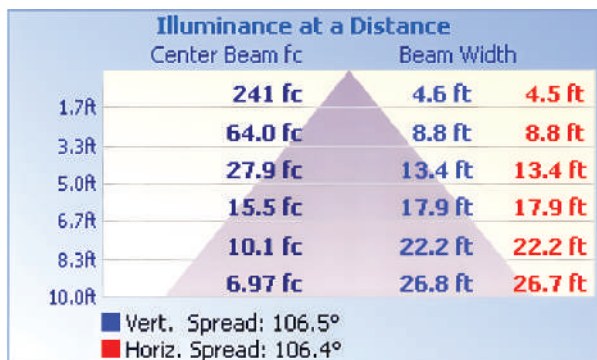

40W

