

Date:

Type:

Project Name:

Part Number:

HELIOS SERIES

WRAP AROUND FIXTURE 2FT & 4FT



APPLICATIONS

- Stairwell
- Low Bay Application
- Corridors
- Education Facilities
- Multi-res/Retirement

FEATURES


- Dual Voltage 120-347V
- 0-10V Continuous Dimming
- Surface or Suspension Mounting options
- Easy and Safe Installation
- Selectable CCT & Wattage
- Frosted Polycarbonate Lens
- 100,000 hours Lifespan
- Ambient Temperature: -30°C - +50°C
- Suitable for Damp Locations
- Includes Coverplate and V-Hangers
- Sensor Available

SPECIFICATION


ORDER #	MODEL#	WATTS	LUMINOUS EFFICACY	VOLTAGE	DIMMING	CCT	CRI
R38003	RENO-HWR2-MW-DV-MCC-MS(2FT)	12/15/18/22W	130 lm/W	120-347V	0-10V	3500/4000/5000K	≥ 80
R38004	RENO-HWR4-MW-DV-MC-MS(4FT)	22/28/34/44W	130 lm/W	120-347V	0-10V	3500/4000/5000K	≥ 80
R71002	RENO-SENSOR-MW-H	Controller for Bi-Level Dim Sensor(optional)					

DIMENSION

2 FT

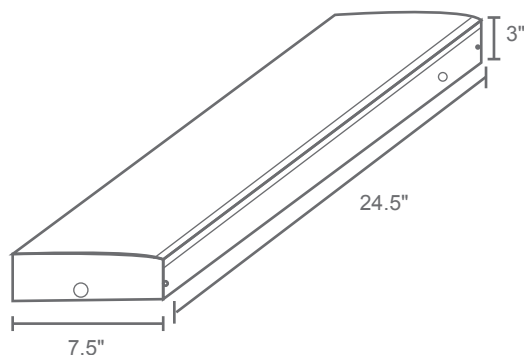


4 FT

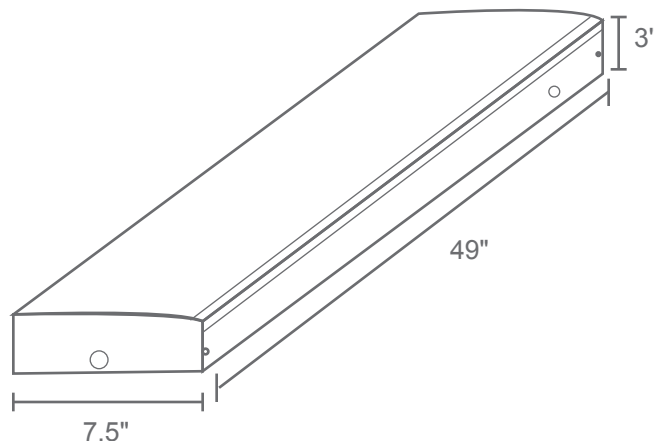

PHOTOMETRIC

22W

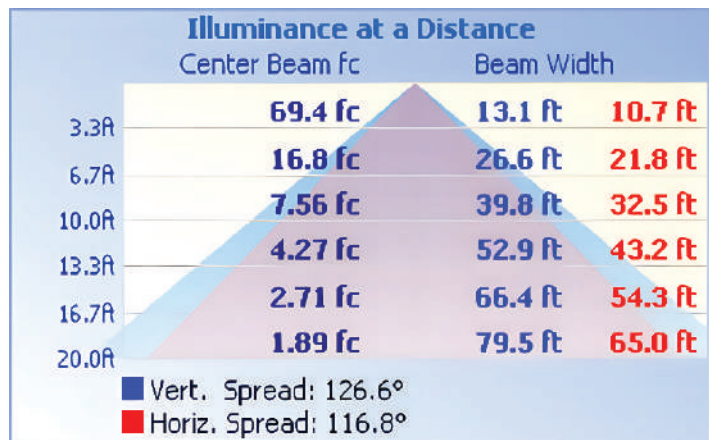

44W

