

Date:	Project Name:
Type:	Part Number:



# HELIOS SERIES

## LED WRAP AROUND



## DESCRIPTION

The Helios series embraces a minimalist design while providing a wide array of features making this fixture adaptable to any indoor application. Utilize the colour and wattage selections built into the fixture to create the perfect look. Easy to install and built to last, this series is sure to impress.

## FEATURES

- DLC premium for the Stairwell and Passageway Luminaires
- Dual Voltage 120-347V
- 0-10V Continuous Dimming
- Surface or Suspension Mounting options
- Easy and Safe Installation
- Frosted PMMA Lens
- Rated Lifetime L70(hrs): >70,000
- Operation temperature: -13°F to 104°F (-25°C to 40°C)
- Suitable for Damp Locations
- Includes Coverplate and V-Hangers
- CRI >80
- 5 year warranty

## APPLICATIONS



Corridors



Education Facilities



Low Bay Application



Multi-res/Retirement



Date:	Project Name:
Type:	Part Number:

## SPECIFICATION

ORDER#	MODEL#	WATTS	VOLTAGE (V)	CCT (K)	SIZE	LUMENS	EFFICACY	CRI
R38005	RENO-HWR2-DV-MW-MCCT-ECO	15/20/25W	120-347V	35/40/50K	2FT	1950/2600/3250 lm	70,000	>80
R38011	RENO-HWR4-DV-MW-MCCT-ECO	30/40/50W	120-347V	35/40/50K	4FT	3900/5200/6500 lm	70,000	>80

## SENSOR OPTIONS

ORDER#	MODEL#	DESCRIPTION
R74002	RENO-SENSOR-PIR-H-EX	For external mounting when installed above 13FT



RENO-SENSOR-PIR-H-EX

## EMERGENCY BATTERY

ORDER#	MODEL#	DESCRIPTION
R83004	RENO-EM-C08	Emergency LED Driver



RENO-EM-C08

Date:	Project Name:
Type:	Part Number:

## REMOTE OPTIONS


ORDER#	MODEL#	DESCRIPTION
R73002	RENO-REMOTE-H	Controller for Bi-Level Sensor (with screen)



RENO-REMOTE-H

## DIMENSIONS

**2FT.**

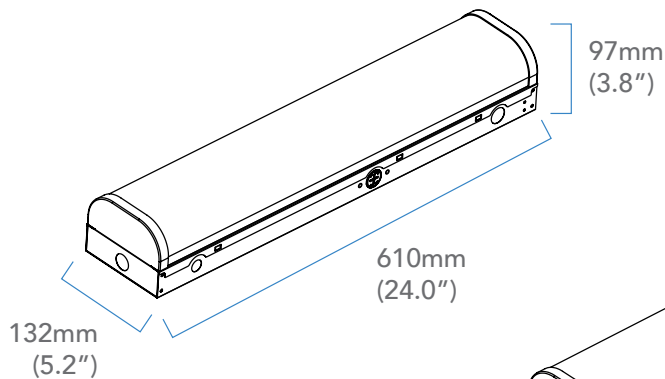

**4FT.**

