


Date:	Project Name:
Type:	Part Number:

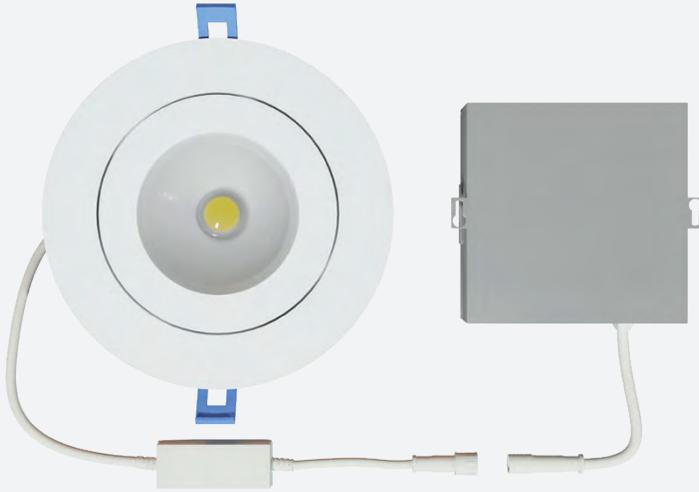

GIMBAL

DESCRIPTION

The RENO Lighting's LED Gimbal High Output downlight combines a sleek design with a small aperture without any compromise to the PP light output. With up to 700 lumens and a CRI of 90, this small downlight provides an outstanding performance that will suit both residential and commercial applications.

FEATURES

- IC-Rated and Air-Tight ready and may be in direct contact with insulation
- May be installed in dry wall or suspended ceilings
- Multi CCT
- 90 CRI standard
- Flicker-free 120V forward-phase triac dimming down to 5%
- Energy-Star, JA8 compliant
- Rated Lifetime L70(hrs): >50,000
- 5 year warranty

APPLICATIONS

-  Residential Ceiling
-  Commercial Lighting
-  Hotel lobby



Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BEAM ANGLE	CCT (K)
R36106	RENO-LED-4-S9W-FG-5CCTWH	9W	4"	120V	700 lm	38°	2700/3000/3500/ 4000/5000K
R36107	RENO-LED-4-S9W-FG-5CCT-BK	9W	4"	120V	700 lm	38°	2700/3000/3500/ 4000/5000K
R36108	RENO-LED-4-S9W-FG-5CCT-WH-SQ	9W	4"	120V	700 lm	38°	2700/3000/3500/ 4000/5000K
R36109	RENO-LED-4-S9W-FG-5CCT-BK-SQ	9W	4"	120V	700 lm	38°	2700/3000/3500/ 4000/5000K


ACCESSORIES

ORDER#	MODEL#	DESCRIPTION
R39108	RENO-MP4	Mounting Plate without clip


Date:	Project Name:
Type:	Part Number:

DIMENSIONS

ROUND

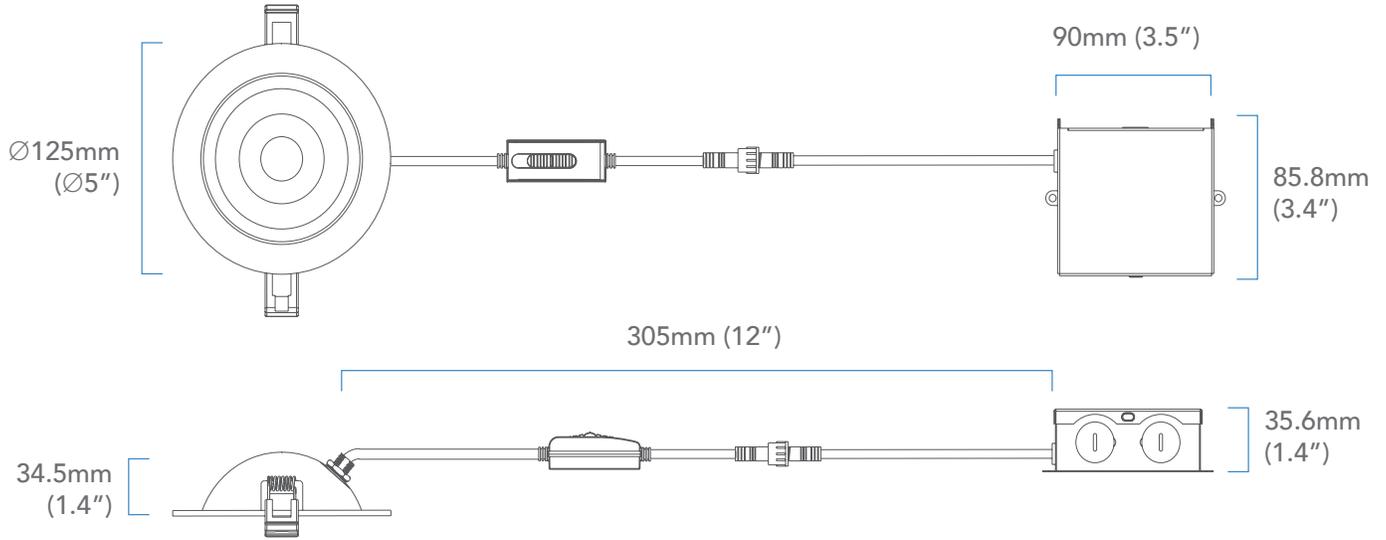

SQUARE

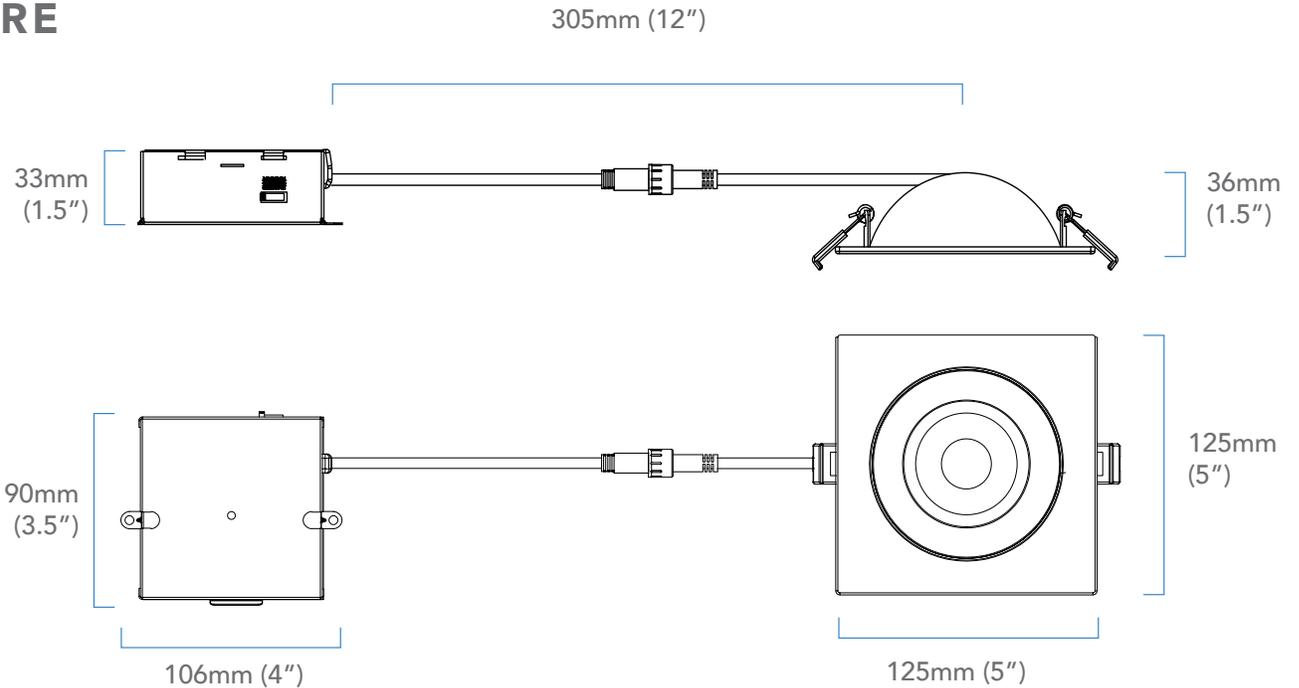

*NOTE: Width in ceiling needed for the driver to fit is 3"
Cut hole size 4-1/4" (108mm)