


SABRE SERIES

LED LINEAR STRIP 4FT. & 8FT. BUIL IN BI-LEVEL DIM SENSOR



BUILT IN SENSOR

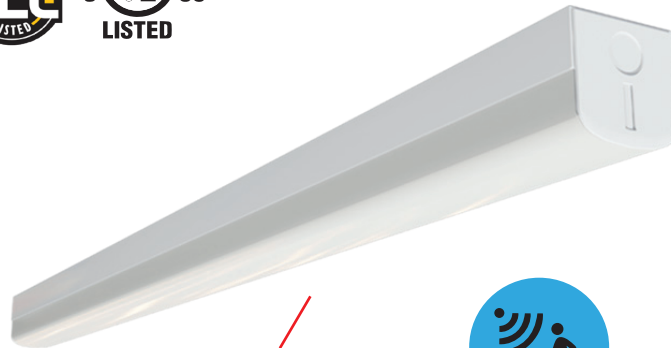

APPLICATIONS

- Parking Garage
- Stairwell
- Low Bay Application
- Warehouse

FEATURES

- Dual Voltage 120-347V
- 0-10V Continuous Dimming
- Surface or Suspension Mounting options
- Easy and Safe Installation
- The field adjustable Multi-Colour
- Frosted Polycarbonate Lens
- 100,000 hours Lifespan
- Ambient Temperature: -30°C - +50°C
- Suitable for Damp Locations
- Includes Coverplate and V-Hangers
- Built in sensor (Default : Dim to 30% after 5 mins)

SPECIFICATION

ORDER #	MODEL#	LUMENS OUTPUT	LUMINOUS EFFICACY	WATTS	VOLTAGE	CCT	CRI
R33020	RENO-LSN4-DV-MCCT-MW-MS(4FT)	2970/3780/4860/5940lm	130lm/W	22/28/36/44W	120-347V	3500/4000/5000K	≥ 80
R33021	RENO-LSN8-DV-MCCT-MW-MS(8FT)	6480/9180/12150lm	130lm/W	48/68/90W	120-347V	3500/4000/5000K	≥ 80
R73002	RENO-LHB-Controller	Controller for Bi-Level Sensor (optional)					

Date:



Type:

Project Name:


Part Number:

DIMENSION

FRONT



BACK




DIMENSION for 8ft.


FRONT



BACK



SETTING

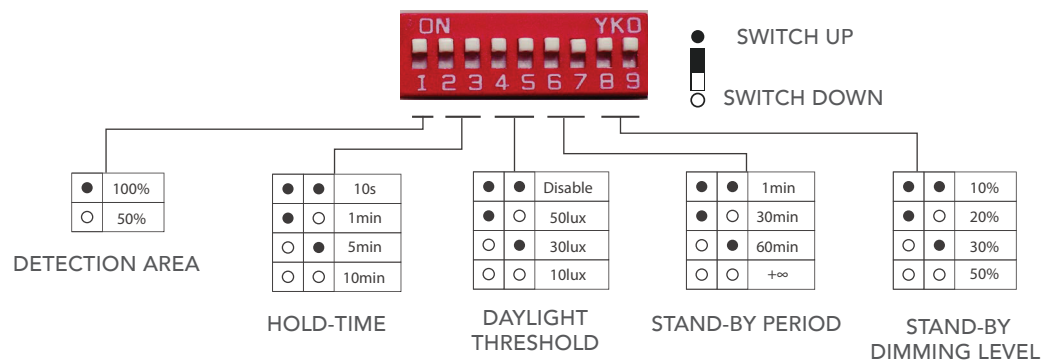

Date:


Type:

Project Name:


Part Number:

LUMINOUS EMITTANCE


22W

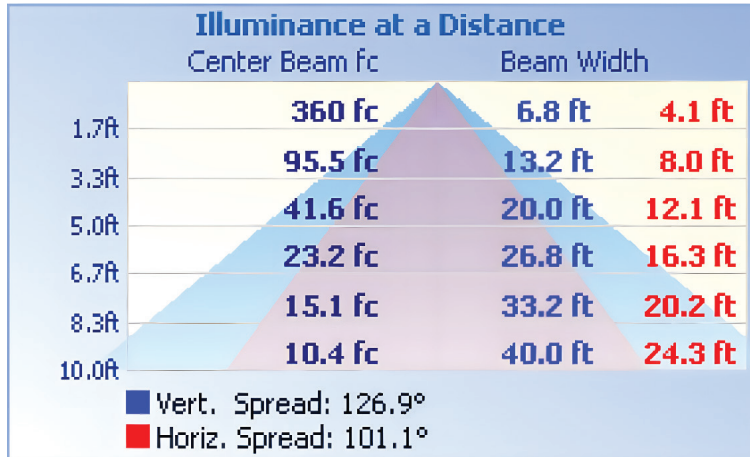

28W

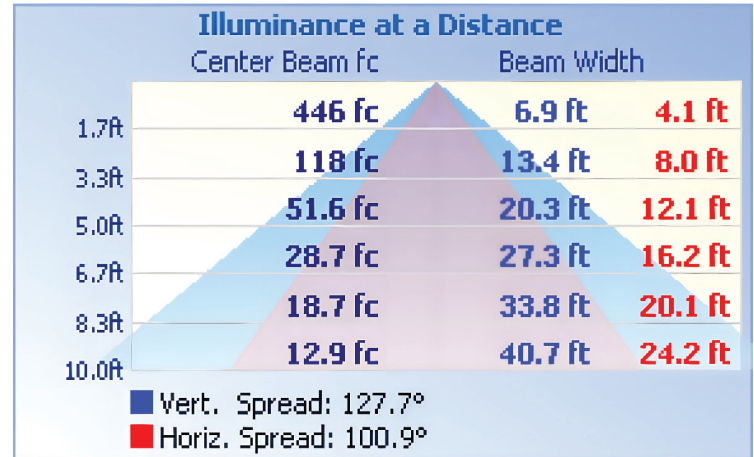

36W

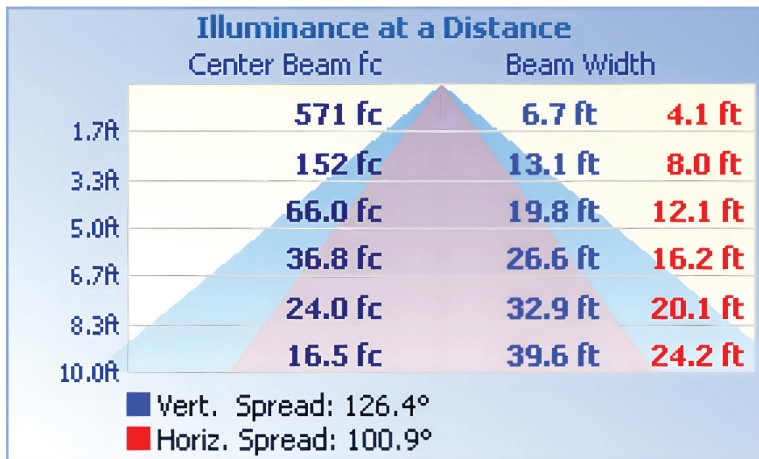

44W

