

MAKO SERIES

LED VAPOR TIGHT FIXTURE



DESCRIPTION

Reno linear vapor tight is housed in polycarbonate silicon perimeter gasket with brackets for mounting. Engineered for powerful lighting. The Reno linear vapor tight has an IP66 protection grade and is DLC and UL certified, making it a great lighting solution for your industrial application.

APPLICATIONS


- Parking Area
- Stairwell
- Low Bay Application
- Utility Lighting

The maximum height this fixture can be mounted for optimal sensor function is 12-13ft. If mounted above this height motion will not be detected as precisely

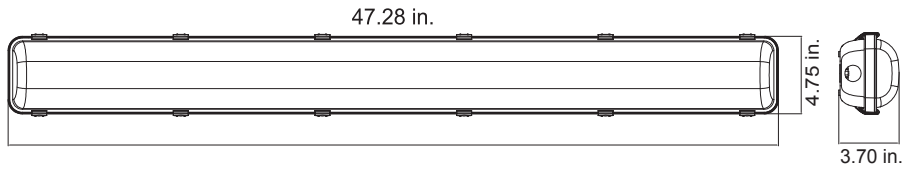
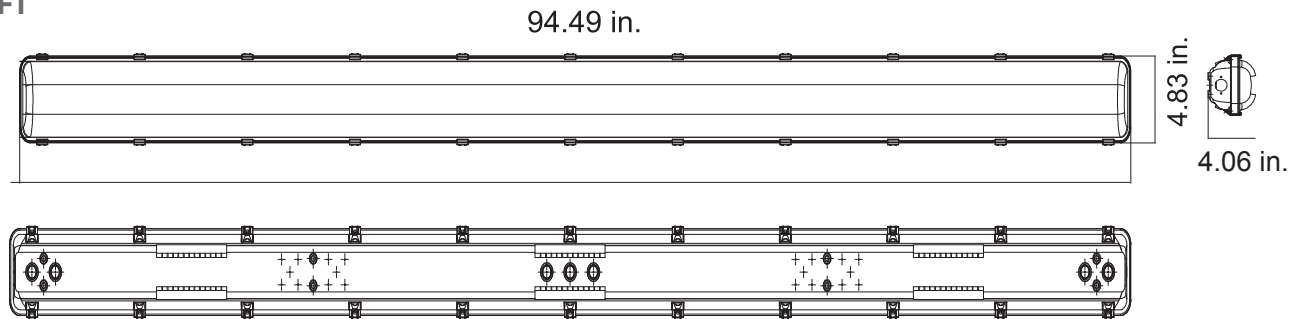
FEATURES

- Surface & Suspended Mounting options via supplied clamps inside the fixture body
- One-piece polycarbonate housing body and frosted polycarbonate lens
- DLC listed and UL listed
- All components have UL certification
- Protection Grade IP66
- CRI 80
- Operating temperature: -22°F - 122°F
- Dual Voltage 120-347V
- Rated Life. > 70,000 hours
- 10-year Limited warranty
- 0-10V Dimming

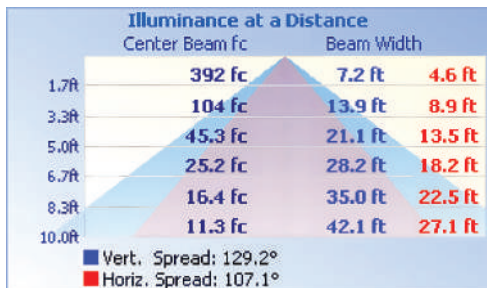
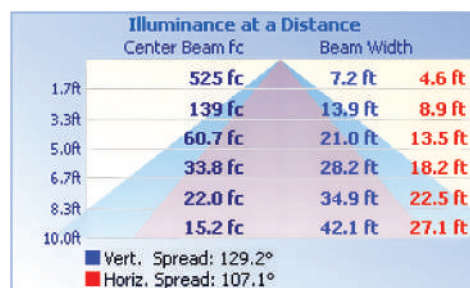
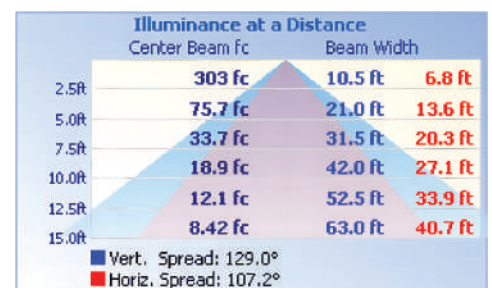
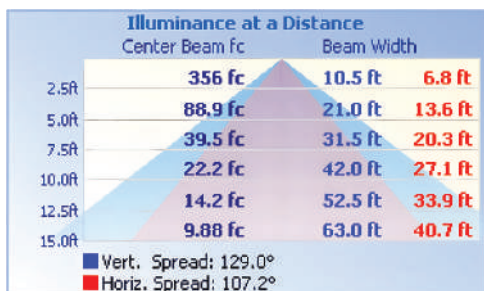
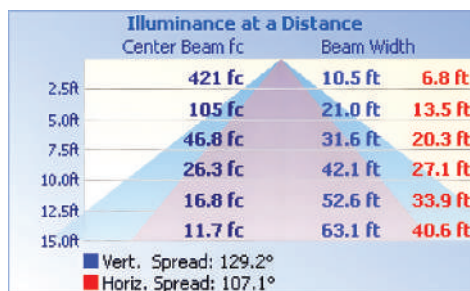
SPECIFICATION

ORDER #	MODEL#	LUMENS OUTPUT	EFFICACY (lm/w)	WATTS	VOLTS	CCT
R33110	RENO-LVP4-DV-MW-MCCT-R1(4FT)	3375/4725/6075	130	25/35/45W	120-347V	3500/4000/5000K
R33111	RENO-LVP4-DV-MW-MCCT-R2(4FT)	6500/7800/8580	130	50/60/66W	120-347V	3500/4000/5000K
R33108	RENO-LVP8-MW-DV-MCCT (8FT)	8100/10800/13550	130	60/80/100W	120-347V	3500/4000/5000K
R74002	RENO-SENSOR-PIR-H-EX	 For external mounting when installed above 13FT				

DIMENSION

4 FT

8 FT


LUMINOUS EMITTANCE

25W

35W

45W

50W

60W

66W
