

MAKO SERIES

LED NARROW BODY VAPOR TIGHT FIXTURE - ECO



DESCRIPTION

Reno linear vapor tight is housed in polycarbonate silicon perimeter gasket with brackets for mounting. Engineered for powerful lighting. The Reno linear vapor tight has an IP66 protection grade and is DLC and UL certified, making it a great lighting solution for your industrial application.

APPLICATIONS

- Parking Area
- Stairwell
- Low Bay Application
- Utility Lighting

FEATURES

- Surface mount and suspension kit optional
- One-piece polycarbonate housing body and frosted polycarbonate lens
- DLC listed and UL listed
- All components have UL certification
- Protection Grade IP66
- CRI 80
- Operating temperature: -22°F - 122°F
- Dual Voltage 120-347V
- Rated Life. > 70,000 hours
- 5-year Limited warranty
- 0-10V Dimming
- Selectable CCT and Wattage


SPECIFICATION

ORDER #	MODEL#	WATTS	EFFICACY (lm/w)	VOLTS	DIMMABLE	CCT
R33118	RENO-LVP2-DV-MW-MCCT-R1-ECO(2FT)	20/25/35W	128 LM/W	120-347V	0-10 VDC	35/40/50K
R33116	RENO-LVP4-DV-MW-MCCT-R1-ECO(4FT)	25/35/45W	128 LM/W	120-347V	0-10 VDC	35/40/50K
R33117	RENO-LVP4-DV-MW-MCCT-R2-ECO(4FT)	50/60/66W	128 LM/W	120-347V	0-10 VDC	35/40/50K



Date:	Type:
Project Name:	Part Number:

DIMENSION

2 FT

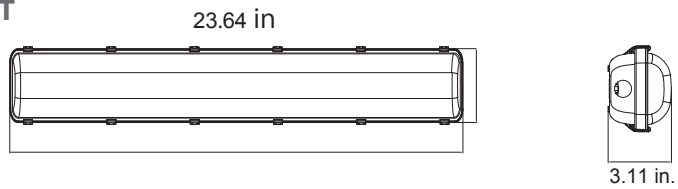

4 FT

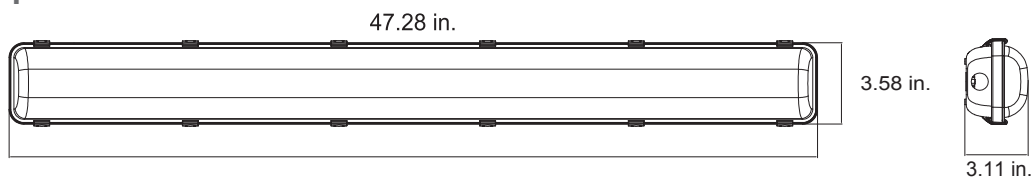

47.28" X 3.58" X 3.11 (H)