

Date:

Type:

Project Name:

Part Number:

OPS SERIES

LED SLIM WALL PACK



DC Button Photocell

FEATURES

- Powder coated black
- Dual Voltage 120-347V
- High and stable lumen output
- 90 Degree Adjustable High
- Elegant and Efficient design
- 70,000 hours lifespan
- 7-year Warranty
- Custom colours available
- Selectable CCT 3000K/4000K/5000K
- Selectable CCT
- IP66 Rated

APPLICATIONS

- Commercial Building
- Exterior Parking
- School & Hospital


SPECIFICATION

ORDER NO.	MODEL NUMBER	WATTS	VOLTAGE(V)	HOUR RATING	BEAM ANGLE	INITIAL LUMENS	CCT(K)
R51113	RENO-SWP-DV-MCCT-R1	21/28/35W	120-347V	70,000	40°	130 Lm/W	3000/4000/5000K
R51114	RENO-SWP-DV-MCCT-R2	45/60/75W	120-347V	70,000	40°	130 Lm/W	3000/4000/5000K
R59101	RENO-WP-PS		DC Button Photocell				




DIMENSION

■ R1

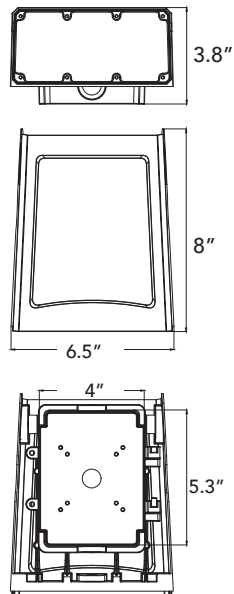

■ R2

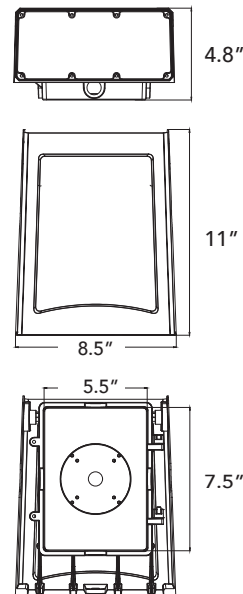

LUMINOUS EMITTANCE

■ R1

21W

Illuminance at a Distance			
	Center Beam fc	Beam Width	
5.0ft	50.6 fc	8.6 ft	10.9 ft
10.0ft	12.7 fc	17.2 ft	21.9 ft
15.0ft	5.63 fc	25.9 ft	32.8 ft
20.0ft	3.17 fc	34.5 ft	43.8 ft
25.0ft	2.03 fc	43.1 ft	54.7 ft
30.0ft	1.41 fc	51.7 ft	65.7 ft
■ Vert. Spread: 81.5° ■ Horiz. Spread: 95.2°			

28W

Illuminance at a Distance			
	Center Beam fc	Beam Width	
5.0ft	63.8 fc	8.6 ft	11.0 ft
10.0ft	16.0 fc	17.2 ft	21.9 ft
15.0ft	7.09 fc	25.8 ft	32.9 ft
20.0ft	3.99 fc	34.3 ft	43.8 ft
25.0ft	2.55 fc	42.9 ft	54.8 ft
30.0ft	1.77 fc	51.5 ft	65.7 ft
■ Vert. Spread: 81.3° ■ Horiz. Spread: 95.2°			

35W

Illuminance at a Distance			
	Center Beam fc	Beam Width	
5.0ft	79.0 fc	8.7 ft	11.0 ft
10.0ft	19.7 fc	17.4 ft	21.9 ft
15.0ft	8.77 fc	26.1 ft	32.9 ft
20.0ft	4.94 fc	34.7 ft	43.9 ft
25.0ft	3.16 fc	43.4 ft	54.9 ft
30.0ft	2.19 fc	52.1 ft	65.8 ft
■ Vert. Spread: 81.9° ■ Horiz. Spread: 95.3°			

■ R2

45W

Illuminance at a Distance			
	Center Beam fc	Beam Width	
5.0ft	111 fc	10.4 ft	12.0 ft
10.0ft	27.8 fc	20.9 ft	24.0 ft
15.0ft	12.4 fc	31.3 ft	36.0 ft
20.0ft	6.95 fc	41.8 ft	48.0 ft
25.0ft	4.45 fc	52.2 ft	60.0 ft
30.0ft	3.09 fc	62.7 ft	72.0 ft
■ Vert. Spread: 92.5° ■ Horiz. Spread: 100.4°			

60W

Illuminance at a Distance			
	Center Beam fc	Beam Width	
5.0ft	143 fc	10.4 ft	12.0 ft
10.0ft	35.7 fc	20.9 ft	24.0 ft
15.0ft	15.9 fc	31.3 ft	36.0 ft
20.0ft	8.93 fc	41.8 ft	48.0 ft
25.0ft	5.71 fc	52.2 ft	60.0 ft
30.0ft	3.97 fc	62.6 ft	72.0 ft
■ Vert. Spread: 92.5° ■ Horiz. Spread: 100.4°			

75W

Illuminance at a Distance			
	Center Beam fc	Beam Width	
5.0ft	171 fc	10.6 ft	12.0 ft
10.0ft	42.9 fc	21.1 ft	23.9 ft
15.0ft	19.1 fc	31.7 ft	35.9 ft
20.0ft	10.7 fc	42.2 ft	47.9 ft
25.0ft	6.86 fc	52.8 ft	59.9 ft
30.0ft	4.76 fc	63.3 ft	71.8 ft
■ Vert. Spread: 93.1° ■ Horiz. Spread: 100.3°			