

| Date: | Project Name: |
|-------|---------------|
| Туре: | Part Number:  |





# HELIOS SERIES **WIDE WRAP AROUND**



#### DESCRIPTION

The Helios series embraces a minimalist design while providing a wide array of features making this fixture adaptable to any indoor application. Utilize the colour and wattage selections built into the fixture to create the perfect look. Easy to install and built to last, this series is sure to impress.

#### **FEATURES**

- **DLC Standard**
- Optional integrated sensor available
- Dual Voltage 120-347V
- 0-10V Continuous Dimming
- Surface or Suspension Mounting options
- Easy and Safe Installation
- Frosted Polycarbonate Lens
- Rated Lifetime L70(hrs): >70,000
- Operation temperature: -22°F to 122°F (-30°C to 50°C)
- Suitable for Damp Locations
- Includes Coverplate and V-Hangers
- Sensor Available
- CRI > 80
- 7 year warranty

#### **APPLICATIONS**



































| Date: | Project Name: |
|-------|---------------|
| Туре: | Part Number:  |

# **SPECIFICATION**

| ORDER# | MODEL#   | WATTS | VOLTAGE<br>(V)        | CCT<br>(K) | SIZE     | LUMENS   | EFFICACY   | CRI      |          |          |          |          |        |       |         |          |         |
|--------|--|-------|-----------------------|------------|----------|----------|------------|----------|----------|----------|----------|----------|--------|-------|---------|----------|---------|
|        | R38021 RENO-WHWR4-MW-DV-MCCT 50W 60W 30W 40W 50W 40W 50W 60W 30W 40W 50W 60W | 30W   |                       |            |          | 3936 lm  | 131.2 lm/W |          |          |          |          |          |        |       |         |          |         |
|        |  | 40W   |                       | 2500       | 250014   |          | 5280 lm    | 132 lm/W |          |          |          |          |        |       |         |          |         |
|        |  | 50W   |                       | 3500K      | 3500K    | 6650 lm  | 133 lm/W   |          |          |          |          |          |        |       |         |          |         |
|        |  | 60W   |                       |            |          | 8040 lm  | 134 lm/W   |          |          |          |          |          |        |       |         |          |         |
|        |  | 30W   |                       |            |          | 4200 lm  | 140 lm/W   |          |          |          |          |          |        |       |         |          |         |
| D20024 |  | 40W   | 120-347V 4000<br>5000 | 120-347V   | 120-347V | 120-347V | 120-347V   | 120-347V | 120-347V | 120-347V | 120-347V | 120-347V | 400016 | 457   | 5640 lm | 141 lm/W | . 00    |
| K38UZ1 |  | 50W   |                       |            |          |          |            |          |          |          |          |          |        | 40001 | 4000K   | 4FT      | 7100 lm |
|        |  | 60W   |                       |            |          | 8580 lm  | 143 lm/W   |          |          |          |          |          |        |       |         |          |         |
|        |  | 30W   |                       | 5000K      |          | 5280 lm  | 132 lm/W   |          |          |          |          |          |        |       |         |          |         |
|        |  | 40W   |                       |            | F00014   |          | 6650 lm    | 133 lm/W |          |          |          |          |        |       |         |          |         |
|        |  | 50W   |                       |            | 5000K    |          | 8040 lm    | 134 lm/W |          |          |          |          |        |       |         |          |         |
|        |  |       |                       |            | 8100 lm  | 135 lm/W |            |          |          |          |          |          |        |       |         |          |         |

### **DLC INFORMATION**

| ORDER#                       | MODEL#  | MODEL# APPLICATION                  |          | LC       |
|------------------------------|---|-------------------------------------|----------|----------|
| ORDER#                       | MODEL#  | AFFLICATION                         | STANDARD | PREMIUM  |
| R38021 RENO-WHWR4-MW-DV-MCCT | Low-Bay Luminaires for Commercial and<br>Industrial Buildings | -                                   | S-NWTSGP |          |
|                              | RENO-WHWR4-MW-DV-MCCT   | Direct Linear Ambient Luminaires    | S-MTRPBQ | -        |
|                              |   | Stairwell and Passageway Luminaires | -        | S-17P43M |

## **ACCESSORIES**

| ORDER# | MODEL#      | DESCRIPTION         |
|--------|-------------|---------------------|
| R83004 | RENO-EM-C08 | Emergeny LED Driver |



**RENO-EM-C08** 







| Date: | Project Name: |
|-------|---------------|
| Туре: | Part Number:  |

## **SENSOR OPTIONS**

| ORDER# | MODEL#               | DESCRIPTION                                     |
|--------|----------------------|---|
| R74002 | RENO-SENSOR-PIR-H-EX | For external mounting when installed above 13FT |



**RENO-SENSOR-PIR-H-EX** 

# **REMOTE OPTIONS**

| ORDER# | MODEL#            | DESCRIPTION        |
|--------|-------------------|--------------------|
| R73002 | RENO-REMOTE-H     | Remote Control     |
| R73005 | RENO-REMOTE-H-ECO | ECO Remote Control |






**RENO-REMOTE-H** 

**RENO-REMOTE-H-ECO** 

# **DIMENSIONS**

4FT.

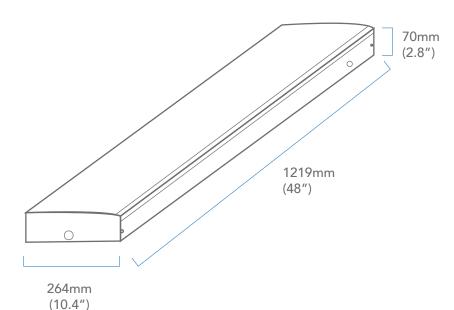



905-604-4666 | info@renolighting.com | www.renolighting.com

