

OPS SERIES

WALL PACK



FEATURES

- Powder coated black
- Aluminum Alloy & Glass Lens
- 30% Slimmer Design
- Even Light Dispersion and Reduced Glare
- Available Flushmount DC Sensor
- Wide Voltage 120-347V
- Selectable CCT 3000K/4000K/5000K
- Selectable Wattage
- Easy Installation & Maintenance
- 70,000 hours lifespan or 7-year Warranty
- Custom colours available
- IP66 Rated

APPLICATIONS

- Commerical Building
- Exterior Parking
- School and Hospital



DC Button Photocell



10KA Surge Protector



Wire Guard




Wall Pack Shield

SPECIFICATION

ORDER #	MODEL #	WATTS	VOLTAGE(V)	HOUR RATING	BEAM ANGLE	INITIAL LUMENS	CCT(K)
R51024	RENO-WP-DV-MCCT-R1	30W/40W/50W	120-347V	70,000	110°	135lm/W	3000/4000/5000K
R51025	RENO-WP-DV-MCCT-R2	45W/60W/75W	120-347V	70,000	110°	135lm/W	3000/4000/5000K
R51026	RENO-WP-DV-MCCT-R3	72W/96W/120W	120-347V	70,000	110°	135lm/W	3000/4000/5000K
R59101	RENO-WP-PS	DC Button Photocell					
R59009	RENO-WP-SP	10KA Surge Protector					
R59007	WALL PACK WIRE GUARD (R1&R2&R3)						
R59008	RENO-WP-SHIELD WALL PACK SHIELD						




DIMENSION

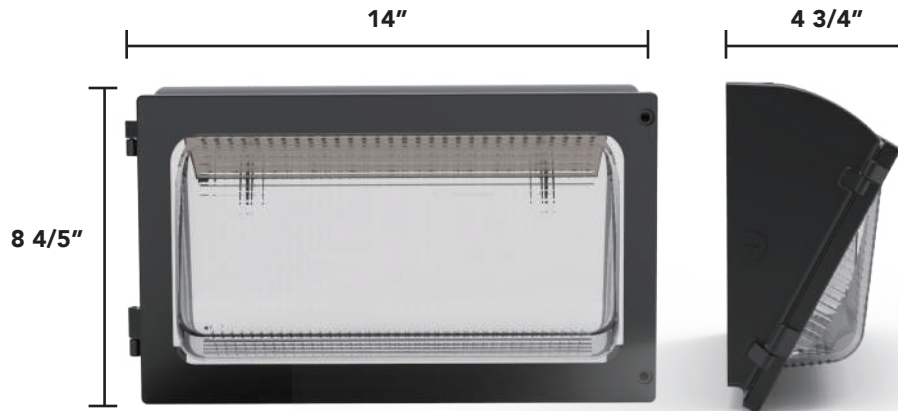


LUMINOUS EMITTANCE

▪ R1- 50W


3000K

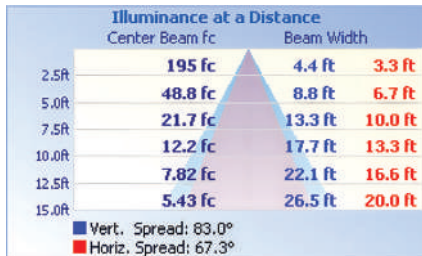

4000K

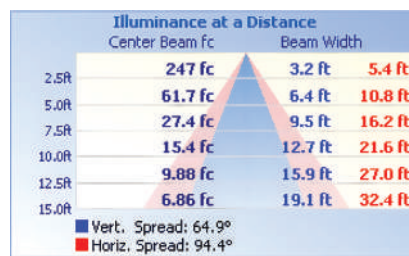


5000K

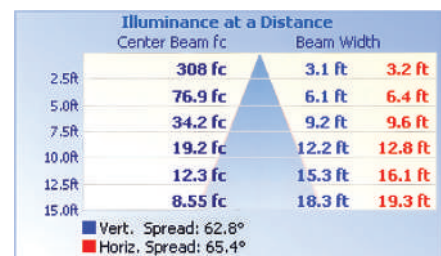


▪ R2- 75W


3000K

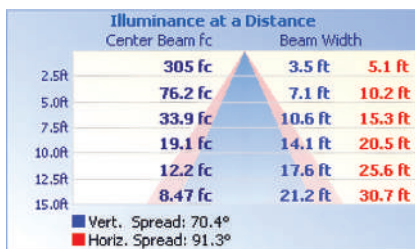

4000K

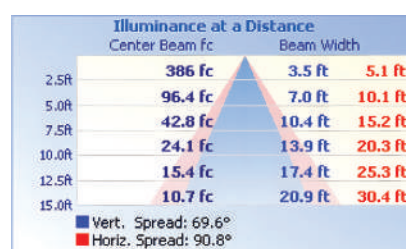


5000K

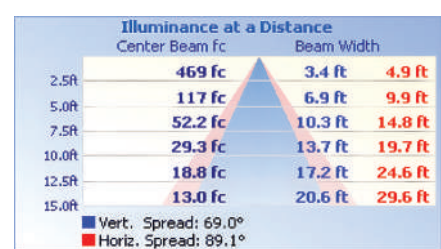


▪ R3-120W

3000K

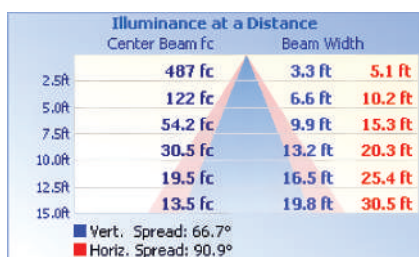

4000K

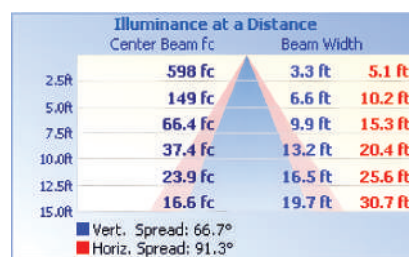

5000K

