

Date:	Project Name:
Type:	Part Number:



PAR16



PAR20



PAR30



PAR38

PAR LAMPS

FEATURES

- Energy Star Listed
- No UV or IR radiation
- Suitable for use in enclosed fixture
- 50W/75W/100W incandescent equivalent
- Rated Lifetime L70(hrs): >25,000
- Elegant and Efficient Design
- 5 year warranty

APPLICATIONS

- General Lighting
- Recessed Down Lights
- Track Lights
- Display Cases



Date:	Project Name:
Type:	Part Number:

SPECIFICATION


ORDER#	MODEL#	WATTS	VOLTAGE (V)	LUMENS	BASE TYPE	BEAM ANGLE	CCT (K)
R21005	RENO-PAR16-6W-E26-Short-830	6W	120V	500 lm	E26	35°	3000K
R21012	RENO-PAR16-6W-E26-Short-840	6W	120V	500 lm	E26	35°	4000K
R21029	RENO-PAR16-6W-E26-Short-850	6W	120V	500 lm	E26	35°	5000K
R21077	RENO-PAR20-7W-3000K-G6	7W	120V	500 lm	E26	40°	3000K
R21078	RENO-PAR20-7W-4000K-G6	7W	120V	500 lm	E26	40°	4000K
R21079	RENO-PAR20-7W-5000K-G6	7W	120V	500 lm	E26	40°	5000K
R21083	RENO-PAR30-10W-3000K-G5	10W	120V	1000 lm	E26	40°	3000K
R21084	RENO-PAR30-10W-4000K-G5	10W	120V	1000 lm	E26	40°	4000K
R21085	RENO-PAR30-10W-5000K-G5	10W	120V	1000 lm	E26	40°	5000K
R21086	RENO-PAR38-13W-3000K-G6	13W	120V	1300 lm	E26	40°	3000K
R21087	RENO-PAR38-13W-4000K-G6	13W	120V	1300 lm	E26	40°	4000K
R21088	RENO-PAR38-13W-5000K-G5	13W	120V	1300 lm	E26	40°	5000K



Date:	Project Name:
Type:	Part Number:

DIMENSIONS


Ø48.3mm (Ø1.9")

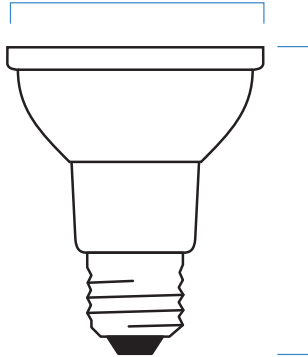

53.3mm
(2.1")

PAR16


Ø63.5mm (Ø2.5")

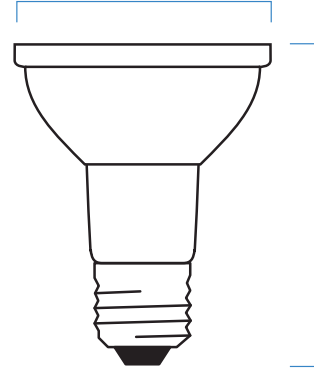

83.8mm
(3.3")

PAR20


Ø96.5mm (Ø3.8")

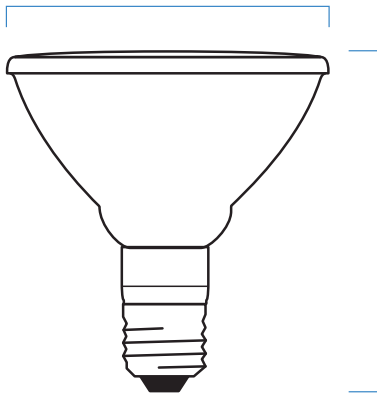

120.7mm
(4.8")

PAR30

Ø121.9mm (Ø4.8")

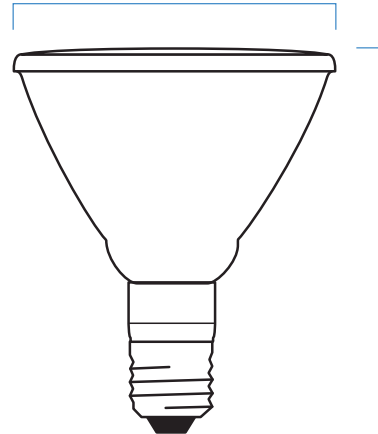

134.6mm
(5.3")

PAR38