


Connector Installation Instructions

Model #'s: TP144, TP145, TP205, TP148
TP149, TP207, TP237, TP238, TP239,
TP150, TP151, TP206, TP146, TP147,
TP208, TP234, TP235, TP236, TP167,
TP168, TP209, TP156, TP157, TP201

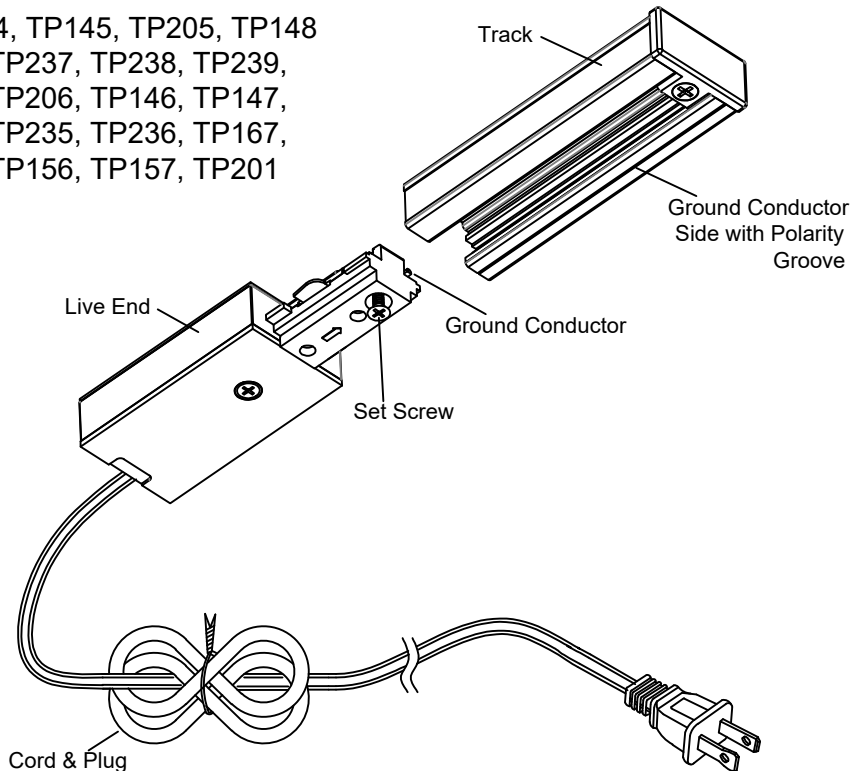

1. Loosen set screw and insert connector with embossed polarity arrow (Ground conductor side) pointing to ground conductor side with polarity groove on track for proper installation.
2. Tighten set screw to lock to track. Do not overtighten. NOTE : Track ends must be terminated with either a Dead End or a connector.

Track Connectors

Mini Straight Connector

Joins 2 Track sections end to end.

"T" Connector / Standard or Reverse Polarity "T" Connector

Joins 3 Track sections. To change polarity configuration, use the Reverse Polarity "T" Connector. See Dots on diagram notating polarity.

"X" Connector

Joins 4 Track sections at 90° angles.

"L" Connector / Standard or Reverse Polarity "L" Connector

Joins 2 Track sections to make a 90° angle. To change polarity configuration, use the Reverse Polarity "L" Connector. See Dots on diagram notating polarity.

Flexible Connector


For inside and outside corners and for other than 90° angles.

To attach the connectors:


1. Make sure the power is OFF!
2. Insert connector fully into Track with arrow pointing toward Track polarity line. Secure with set screw. Do not overtighten.
3. Attach Track to ceiling.




Mini-Straight Connector

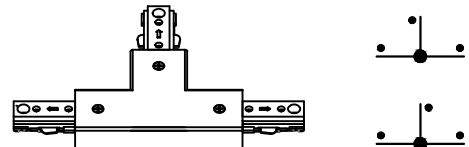


"T" Connector

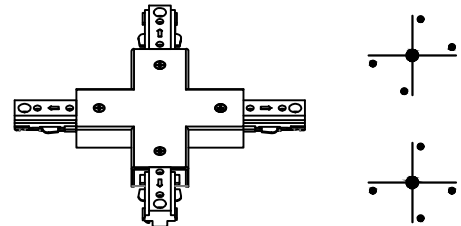

"X" Connector

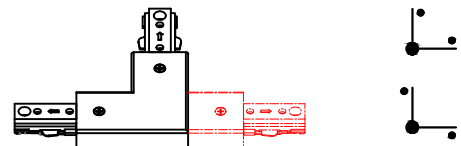

"L" Connector

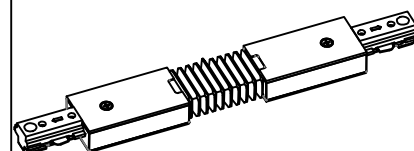

Flexible Connector