

# LED LOW PROFILE WALL PACK

## FIELD SELECTABLE



3-Wattage & 3-CCT Selectable Switches



IK08 Vandal Resistant Glass Lens



**WATTAGE & CCT SELECTABLE**

**LOW PROFILE DESIGN - EXTENDS LESS THAN 4.25"**

**INTEGRATED BY-PASSABLE PHOTOCELL**

**IK08 VANDAL RESISTANT GLASS LENS**

**SUGGESTED APPLICATIONS**

Industrial, Commercial, Parking Garages, Hotels, Pathways, Warehouses



Integrated Photocell



1/2" Knockouts on Both Sides of Fixture

SATCO|NUVO's LED Low Profile Wall Pack offers field-selectable settings, allowing you to tailor the wattage and color temperature to your needs. The sleek low-profile design features a durable IK08 vandal resistant lens to ensure a clean look and durability. Added features include 0-10V dimming, an IP65 rating, and an integrated photocell that can easily be by-passed if needed with the convenient on/off switch.



**GENERAL SPECIFICATIONS**

**Range Voltage, Frequency:** 120V-277V, 50/60Hz  
**Power Factor, THD%:** >0.9, <20%  
**Dimming:** 0-10V Dimmable Down to 10%  
**Surge Protection Rating:** 4kV  
**Integrated Photocell:** Yes  
**CRI:** 80  
**CCT:** 3000K/4000K/5000K  
**Beam Angle:** 90°

**BUG Rating:** 65-884 B1-U3-G3  
 65-885 B1-U3-G5  
**Functional Life:** 50,000 Hours  
**Location Rating:** Wet  
**IP Rating:** IP65  
**Ambient Operating Temperature:** -40°C (-40°F) to +50°C (+122°F)  
**Material:** Die-Cast Aluminum  
**Finish:** Bronze  
**Lens Material:** Borosilicate Glass - IK08 Rated




**ITEM SPECIFICATIONS / ORDER INFO**


Item	Wattage	Lumens	Input Current @120V/277V	Efficacy	DLC ID
65-884	30W/45W/60W	3,844-7,506	0.25-0.11/0.38-0.16/0.50-0.22A	Up to 128 LPW	S-27Y08Z
65-885	70W/85W/100W	8,817-12,941	0.58-0.25/0.71-0.31/0.83-0.36A	Up to 129 LPW	S-3MA72N

**DIMENSIONS/WEIGHTS**

Item	A-Length	B-Height	C-Depth	Weight
65-884/885	15.55"	9.76"	4.21"	9.26 Lbs.

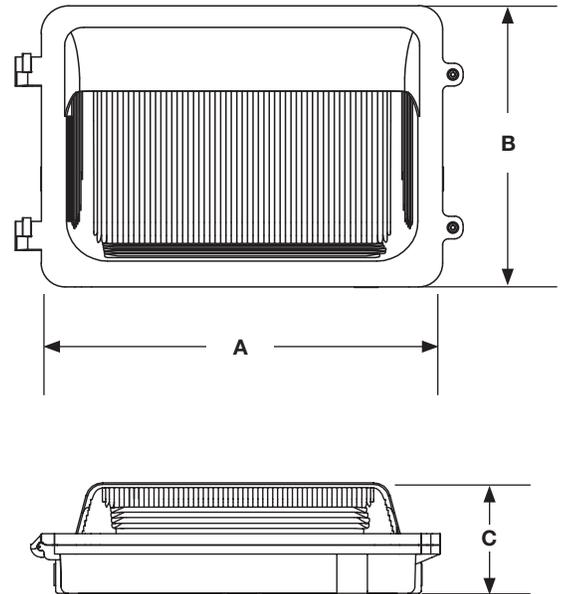

**PHOTOMETRICS**

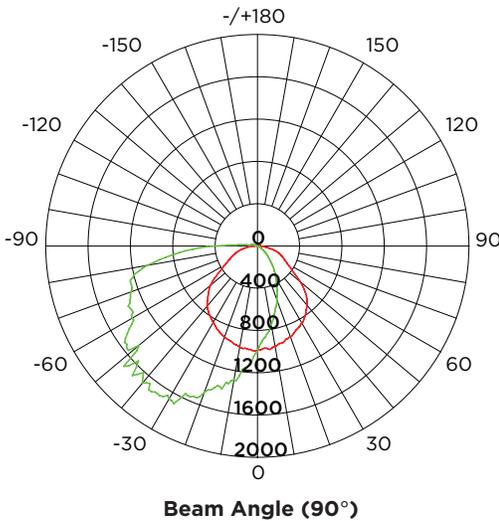

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Fixture may not be compatible with all dimmers.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

Specifications are subject to change without prior notice.

DLC Primary Use: Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires.