

Project:

V Panels Pendant Spec Sheet


SKU: 3090.14

Designed to celebrate the transformative quality of light, V Panels refract LED illumination outward as well as downward through the bottom panel edge. V Panels pendants are capped with a crisp rectilinear top, and are available in various widths. V Panels is also available in multiple [chandelier](#) configurations.

Scaled for residential, hospitality and commercial settings for an enduring modern presence.

Learn more: <https://sonnemanlight.com/v-panels-single-pendant>

Type #:

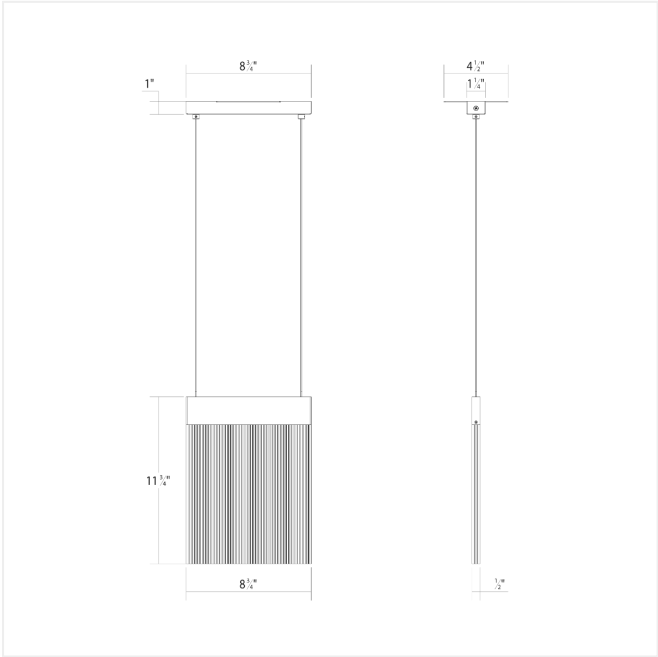

Dimensions

Height:	11.75"
Width:	0.5"
Length:	8.75"
Hanging Details:	20' Adjustable Cord
Size:	Pendant

Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	1
Input Voltage:	120-277VAC
Wattage:	15
Initial Lumens:	1360
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Canopy
Dimming Type:	TRIAC/ELV/0-10V

Installation

Installation:	Licensed electrician required
Sloped Ceiling Compatible?:	Compatible up to 45°
Installation Orientation:	N/A
Cord Length:	20' Adjustable Cord
Minimum Hanging Height:	13"
Maximum Hanging Height:	250"
Orientation:	N/A

Shade

Shade Material:	Acrylic
Shade 1 Color:	Clear
Shade 2 Color:	N/A
Shade 3 Material:	N/A
Shade 3 Color:	N/A

General Listings

Features:	At NYDC, Damp Rated
Certification:	C-ETL-US
Color/Finish:	Brass Finish (.14)

Available Finishes

Available Finishes:	Brass Finish (.14), Polished Chrome (.01)
---------------------	---

Available Color Temperatures

Available Color Temperatures:	3000k
-------------------------------	-------