

Technical Information Bulletin

Worklights



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67022
 Description: PFL/BTRY/100-240/50W/CW/YL/STD
 UPC: 69549670228
 Case quantity: 2

PHYSICAL DATA

Type: LED Flood Light
 Housing colour: Yellow
 Housing Material: Aluminium




PERFORMANCE DATA

Watts (W): 50
 Volts (VAC): 100-240
 Colour temp.: Cool White
 Lumen output (lm)¹: 3 250
 Lumen per Watts (lm/W): 65
 CRI: 70
 Battery at 20% Brightness: 12
 working time (h): at 50% Brightness: 6
 at 100% Brightness: 3
 Battery Charging time (h): 6
 Beam angle (°): 120
 Amperage (A): 6.6
 Battery Specifications: 18.5V 6.6AH
 Environment: Dry
 Operating temp. range: -10°C to 40°C (14°F to 104°F)
 Dimming: Yes

¹ Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

TECHNICAL DRAWINGS AND DIMENSIONS

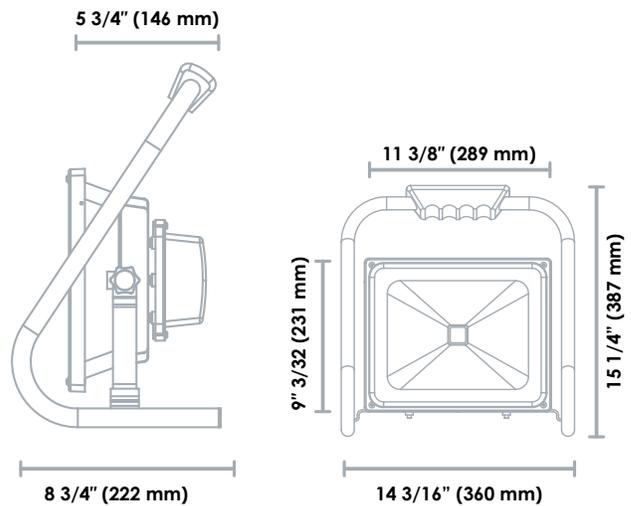

COMPATIBLE ACCESSORIES

Order code	Description	Type
67025	PFL/TRIPOD/YL/STD	Tripod
67027	PFL/CHARGER/50W/STD	50 W replacement battery charger

DESCRIPTION AND OTHER OPTIONS

PLF	BTRY	100-240	50W	CW	YL	STD
Family	Feature	Volts (V)	Watts (W)	Colour Temperature	Colour	Brand
PLF Portable Flood Light	BTRY Battery Powered	100-240 100-240 Volts	50W 50 Watts 20W 20 Watts	CW Cool White	YL Yellow	STD STANDARD

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. October 19, 2018