


## Features & Benefits

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast installation
- Replaceable directional chevron inserts are easily removed and reinserted
- Letters 6" height with 3/4" stroke
- Double face configuration
- Universal mounting- wall, side, or ceiling
- Housing snaps to canopy with simple twist and locking tightly secure housing to canopy
- 120/277 VAC dual voltage operation
- Low energy consumption- only 2.0 W at 120v
- LED indicator light and push button test switch
- LEDs mounted on print circuit board
- LED lamps are operating in normal (AC input) and emergency (DC input) modes
- 24 hours recharge after 90 minute discharge
- Low voltage battery disconnection- preventing deep discharge damage to the battery
- Maintenance-Free, Ni-Cd battery provides an estimated service life of 10 years with an operating temperature range of 10C to 40C
- ETL Listed for damp location
- Meets NFPA 101, NEC, and UL924 approvals



## Dimensions:

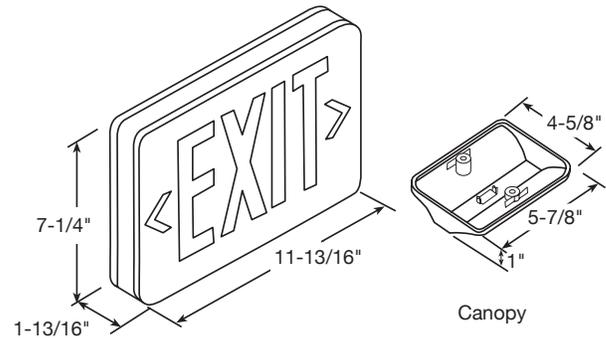

## Ordering Information

Item #	DESCRIPTION	LED COLOR	HOUSING COLOR	AC/BBUP
22742	Red LED Exit Sign Universal AC Only WH Housing	Red	White	AC
22743	Red LED Exit Sign Universal Battery Backup WH Housing	Red	White	BBUP
22744	Green LED Exit Sign Universal AC Only WH Housing	Green	White	AC
22745	Green LED Exit Sign Universal Battery Backup WH Housing	Green	White	BBUP

Specifications and dimensions subject to change without notice.