



Wet Location Exit and Combination Unit Specification

LED Exit Signs

120 or 277 Voltage, Wet Location

Features and Benefits:

- ABS, corrosion-resistant UV stabilized enclosure
- Universal 120/277 VAC operation
- Removable directional indicators
- Extremely low operating costs
- 80-year light source life expectancy
- Meets NFPA Life Safety 101, NEC, OSHA, local and state codes
- Wet location listed
- Wet location 0°C to 40°C
- Suitable for indoor or outdoor applications
- 23500 & 23501 are NEMA 4 rated



Catalog Number

Notes

Type



Dimensions:

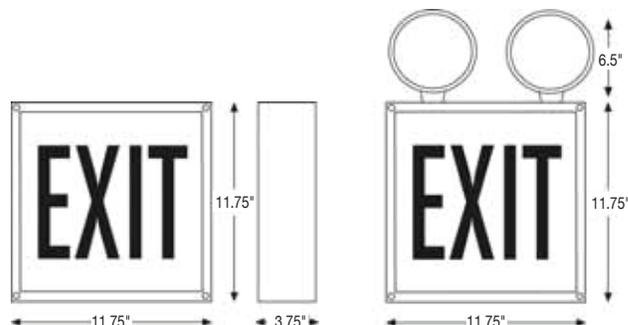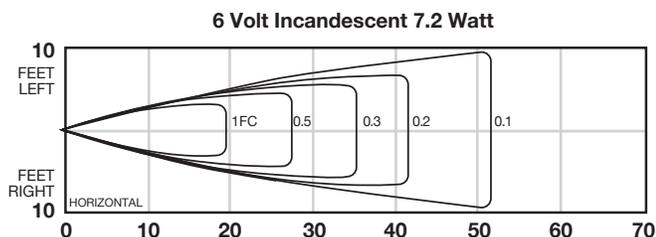

Warranties & Compliances:	Item #	Description	LED Color	Voltage Input	Lamp Type	Emergency Operation (minutes)
 Ni-Cd battery 5 YEAR WARRANTY Unit 5 YEAR WARRANTY LED Strip 25 YEAR WARRANTY	Ordering Information:					
	23500	Red Wet Location Single Face LED with Battery Back-up	Red	120/277	LED	90
	23501	Green Wet Location Single Face LED with Battery Back-up	Green	120/277	LED	90
	23504	Red LED Wet Location Single Face Combo with Battery Back-up	Red	120/277	LED+ 7.2W 6V	90
	23505	Green LED Wet Location Single Face Combo with Battery Back-up	Green	120/277	LED+ 7.2W 6V	90
Accessories:						
	20732	Replacement Battery Ni-Cd 4.8V 1000mAh				
	20733	Replacement Battery Ni-Cd 6V 4500mAh				
	939	Replacement Lamp 6V 0.9A T5 Wedge				

