

Industra

by TCP



LED Vapor Tight

Great Features/Benefits

The TCP Vapor Tight Luminaire is perfect for your wet location low bay needs. Providing ample light at a low energy cost, the vapor tight is ready for the worst weather. With a plastic frame, and included mounting hardware, the TCP Vapor Tight is durable and quick to install.

- Plastic cover and frame
- Frosted PC lens for glare control
- Wet location rated
- Long life: 50,000 hours
- Operating temperature: -5° to 104°F
- Wide beam spread

Limitless Options for the following applications:

- Parking Garages
- Car Washes
- Cold Storage
- Garden Centers
- Corridors
- Stairwells
- Hallways



5 YEAR WARRANTY*

LED Vapor Tight

Applications

The TCP Vapor Tight can be effectively used in low mounted indoor and outdoor locations. Recommended for commercial or industrial settings such as parking garages, car washes, cold storage, garden centers and more.

Features

- Durable lens and housing
- -40C (-40F) to 55C (130F) operating range

Electrical

- cULus wet location rated
- Easy-to-access wiring compartment
- System rated for long 50,000 hour life
- Efficiently delivers >130 LPW



Optics

- PC plastic lens to prevent discoloration
- Delivers bright, white light and excellent uniformity



Warranty Five year limited warranty against defects in manufacturing.	Listings UL and cUL listed RoHS Compliant DLC 4.4 Premium IP65
---	---

For the most up-to-date specs and warranty information, please visit www.tcpi.com

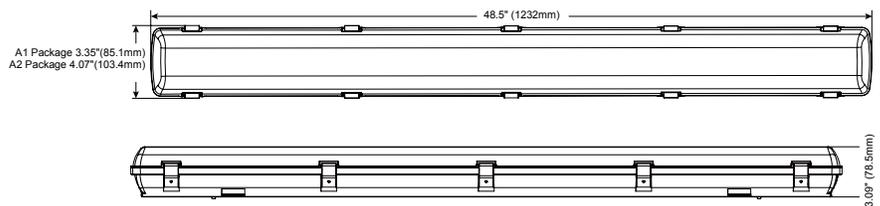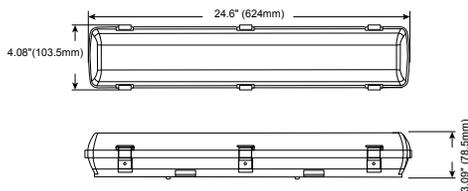

ITEM #	DESCRIPTION	DLC	LUMENS	WATTAGE	LPW	VOLTAGE	POWER FACTOR	CCT	CRI	LIFE	L(in.)	H(in.)	W(in.)
LED 2 Foot Vapor Tight • 50,000 Hour, Frosted Lens													
VTF2UZDA140K	LED 2 Foot Vapor Light - 40K	★	3100	24	130	120V-277V AC	≥0.9	4000K	80	50000	24.88	3.09	4.08
VTF2UZDA150K	LED 2 Foot Vapor Light - 50K	★	3100	24	130	120V-277V AC	≥0.9	5000K	80	50000	24.88	3.09	4.08
LED 4 Foot Vapor Tight • 50,000 Hour, Frosted Lens													
VTF4UZDA140K	LED 4 Foot Vapor Light - 40K	★	2600	20	130	120V-277V AC	≥0.9	4000K	80	50000	48.3	3.09	3.35
VTF4UZDA150K	LED 4 Foot Vapor Light - 50K	★	2600	20	130	120V-277V AC	≥0.9	5000K	80	50000	48.3	3.09	3.35
VTF4UZDA240K	LED 4 Foot Vapor Light - 40K	★	5400	40	135	120V-277V AC	≥0.9	4000K	80	50000	48.3	3.09	4.08
VTF4UZDA250K	LED 4 Foot Vapor Light - 50K	★	5400	40	135	120V-277V AC	≥0.9	5000K	80	50000	48.3	3.09	4.08

Options

SW1 Sharkward BRI810B-D (20 ft max height)

