


LED FIXTURE

DL Series

LED Eco-Commercial Strip

DL-EC NEW MW-MK


Linear 4' and 8' LED strip light, 120-347V auto-sensing driver
Multiple Wattage - Multiple Kelvin

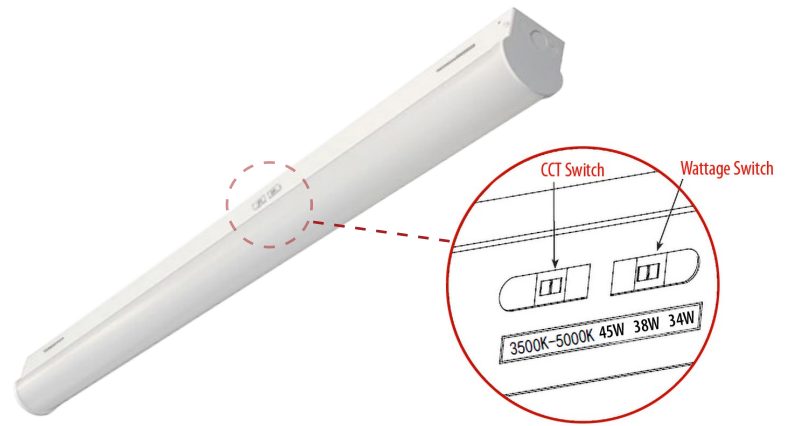


Features & Benefits

- cUL listed
- Selectable wattage and adjustable CCT
- 4' and 8' length selection
- 120-347V Auto-sensing driver, 0-10V dimming
- Average rated life 100,000 hrs L70 (TM-21 @ 70 °C), CRI ≥ 80
- White metal finish, PMMA Opal Lens
- Surface or Suspended mounting, row mountable w/ joiner plate
- Damp location rated
- Operating temperature range between -20°C and +50°C

Dimensional Drawing



Unique J-Box cover supplied

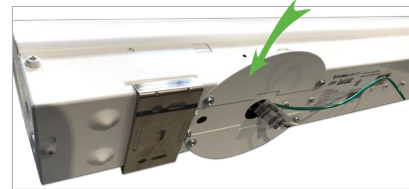

	L	W	H
4FT	47.3"	3.3"	3.6"
8FT	94.2"	3.3"	3.6"

Warranty

5-year limited warranty in commercial use from the date of purchase

Applications

Offices, Hallways, Multipurpose Rooms, Warehouse etc.

Ordering Information Example: DL-EC/4F/56W/MK/120-347V/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Sensor	Option
DL (Deltalum)	EC (Eco-Commercial)	4F (4') 4FS (4' Small Wattage) 4FL (4' Large Wattage) 8FL (8' Large Wattage)	56W MW (Multiple Wattage)	MK (Multiple CCT)	120-347V	D (Dimmable)	S (Sensor)	RM (Row MTG Plate) S (Microwave Sensor) TL-2052 PIR Sensor

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)	Case QTY.
3666309	DL-EC/4F/56W/MK/120-347V/D	56	120-347V	100,000	120°	7280	35-40-50	>80	Yes	48	6
3664306	DL-EC/4FS/MW/MK/120-347V/D	30-25-18	120-347V	100,000	120°	3900-3250-2340	35-40-50	>80	Yes	48	6
3664307	DL-EC/4FL/MW/MK/120-347V/D	45-38-34	120-347V	100,000	120°	5850-4940-4420	35-40-50	>80	Yes	48	6
3664308	DL-EC/8FL/MW/MK/120-347V/D	90-75-65	120-347V	100,000	120°	11700-9750-8450	35-40-50	>80	Yes	96	4
3666310	DL-EC/4F/56W/MK/120-347V/D/S	56	120-347V	100,000	120°	7280	35-40-50	>80	Yes	48	6
3666311	DL-EC/4FL/MW/MK/120-347V/D/S	45-38-34	120-347V	100,000	120°	5850-4940-4420	35-40-50	>80	Yes	48	6
3666312	DL-EC/8FL/MW/MK/120-347V/D/S	90-75-65	120-347V	100,000	120°	11700-9750-8450	35-40-50	>80	Yes	96	4
3660057	DL-EC/4F/LENS	4ft, replacement white PMMA lens									
3660058	DL-EC/8F/LENS	8ft, replacement white PMMA lens									
3660092	DL-EC/4F/WG	4ft, Wire guard									
Option	DL-EC/RM	Row mounting plate									
	S	Microwave sensor factory installed (consult for lead time)									
	TL-2052	PIR motion sensor (sold separately)									