

LED FIXTURE

DL Series

LED Eco-Commercial Strip DL-EC

Linear 2', 3', 4' and 8' LED strip light, 120-347V auto-sensing driver



Features & Benefits

CUL listed, DLC(Premium)

2', 3', 4' and 8' length selection

120-347V Auto-sensing driver (except 90W), 0-10V dimming

Average rated life 100,000 hrs L70 (TM-21 @ 70 °C), CRI ≥ 80


System light efficacy ≥ 130lm per watt

White metal finish (black available for special order), PMMA Opal Lens


Surface or Suspended mounting, row mountable w/ joiner plate

Damp location rated

Dimensional Drawing



Unique J-Box cover supplied

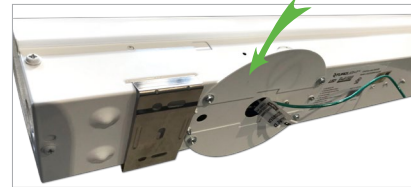

	L	W	H
2FT	22.2"	3.3"	3.6"
3FT	35.0"	3.3"	3.6"
4FT	47.3"	3.3"	3.6"
8FT	94.2"	3.3"	3.6"

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -20°C and +50°C

Applications

Offices, Hallways, Multipurpose Rooms, Warehouse etc.

Ordering Information Example: DL-EC/4F/35W/40/120-347V/D/S

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Sensor	Option
DL (Deltalum)	EC (Eco-Commercial)	2F (2')	20W (2')	35 (3500K)	120-347V	D (Dimmable)	S (Sensor)	RM (Row MTG Plate)
		3F (3')	25W (3')	40 (4000K)	UNV (120-277V)			S (Microwave Sensor)
		4F (4')	35W, 45W, 56W (4')	50 (5000K)	347V			TL-2052 PIR Sensor
		8F (8')	65W, 90W (8')					

Product Specification

Ordering Code	DLC (Premium)	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating(L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)
3663209	Y	DL-EC/2F/20W/35/120-347V/D	20	120-347V	100,000	120°	2,600	3500K	>80	Yes	22.2"
3663208	Y	DL-EC/2F/20W/40/120-347V/D	20	120-347V	100,000	120°	2,600	4000K	>80	Yes	22.2"
3664206	Y	DL-EC/3F/25W/40/120-347V/D	25	120-347V	100,000	120°	3,250	4000K	>80	Yes	35.0"
3665250	Y	DL-EC/4F/35W/35/120-347V/D	35	120-347V	100,000	120°	4,550	3500K	>80	Yes	47.3"
3665225	Y	DL-EC/4F/35W/40/120-347V/D	35	120-347V	100,000	120°	4,550	4000K	>80	Yes	47.3"



LED Eco-Commercial Strip

DL-EC

Ordering Code	DLC (Premium)	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating(L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)
3665242		DL-EC/4F/35W/40/120-347V/D/S	35	120-347V	100,000	120°	4,550	4000K	>80	Yes	47.3"
3665226	Y	DL-EC/4F/35W/50/120-347V/D	35	120-347V	100,000	120°	4,585	5000K	>80	Yes	47.3"
3665251	Y	DL-EC/4F/45W/35/120-347V/D	45	120-347V	100,000	120°	5,850	3500K	>80	Yes	47.3"
3665227	Y	DL-EC/4F/45W/40/120-347V/D	45	120-347V	100,000	120°	5,850	4000K	>80	Yes	47.3"
3665246		DL-EC/4F/45W/40/120-347V/D/S	45	120-347V	100,000	120°	5,850	4000K	>80	Yes	47.3"
3666247	Y	DL-EC/4F/56W/40/120-347V/D	56	120-347V	100,000	120°	7,280	4000K	>80	Yes	47.3"
3666248		DL-EC/4F/56W/40/120-347V/D/S	56	120-347V	100,000	120°	7,280	4000K	>80	Yes	47.3"
3666229	Y	DL-EC/8F/65W/40/120-347V/D	65	120-347V	100,000	120°	8,450	4000K	>80	Yes	94.2"
3666230	Y	DL-EC/8F/65W/50/120-347V/D	65	120-347V	100,000	120°	8,515	5000K	>80	Yes	94.2"
3666137	Y	DL-EC/8F/90W/40/UNV/D	90	120-277V	100,000	120°	11,700	4000K	>80	Yes	94.2"
3666237	Y	DL-EC/8F/90W/40/347V/D	90	347V	100,000	120°	11,700	4000K	>80	Yes	94.2"
3660055		DL-EC/2F/LENS	2ft, replacement white PMMA lens								
3660056		DL-EC/3F/LENS	3ft, replacement white PMMA lens								
3660057		DL-EC/4F/LENS	4ft, replacement white PMMA lens								
3660058		DL-EC/8F/LENS	8ft, replacement white PMMA lens								
3660092		DL-EC/4F/WG	4ft, Wire guard								
Option		DL-EC/RM	Row mounting plate								
		S	Microwave sensor factory installed (consult for lead time)								
		TL-2052	PIR motion sensor (sold separately)								