

LED FIXTURE

PRO Series



LED Backlit Panel PRO-BLP

Ultra slim LED backlit panel
Multiple Wattage - Multiple Kelvin, 120-277V



5-year limited warranty

Operating temperature range -20° C ~ +40° C




2' x 4'

2' x 2'

Features & Benefits

cULus listed
Multiple Wattage and Multiple Kelvin (CCT)
2 Convenient sizes (2'x4', 2'x2'), no UV & IR emission
120-277V, 125lm/W
L70 @ 50,000 Hrs, CRI ≥80
0-10V Dimmable
Aluminum body
Damp location rated

Dimensional Drawing

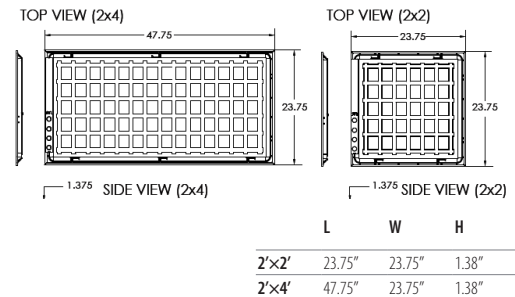

Ordering Information Example: PRO-BLP/22/MW/MK/UNV/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable
PRO	BLP (LED backlit panel)	22 (2'x2') 24 (2'x4')	MW (Multiple Wattage)	MK (Multiple Kelvin)	120 -277V	D (0-10V dimmable)

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	Case QTY.
3680106	PRO-BLP/22/MW/MK/UNV/D	30-25-20	120-277V	50,000	120	3750-3125-2500	35-40-50	>80	Yes	4
3680105	PRO-BLP/24/MW/MK/UNV/D	40-35-30	120-277V	50,000	120	5000-4375-3750	35-40-50	>80	Yes	4

