

LED FIXTURE

RIGID Series

LED Slim Panel PRO-SP2

Slim design allows it to be installed in low plenum ceilings.



Features & Benefits

- Type IC Rated – approved for direct contact with insulation, FT4 rated cable
- Isolated internal driver in junction box – fast and easy to install
- Finish colour white, damp location rated
- PC lens aluminium body, 120° beam angle

- Energy Star approved
- L70 @ 60000 Hrs, High CRI (80+)
- Dimmable Triac down to 10%
- PL-AMP4 mounting plate ordered separately


Warranty

- 3-year limited warranty
- Operating temperature range between -20°C and +40°C

Applications

Residential / Commercial, Schools, Retirement Homes, University, Supermarkets, Shops, Hotels, Conference Rooms, Office Lighting, Show Room, Corridor, Kitchens etc.

Dimensional drawing

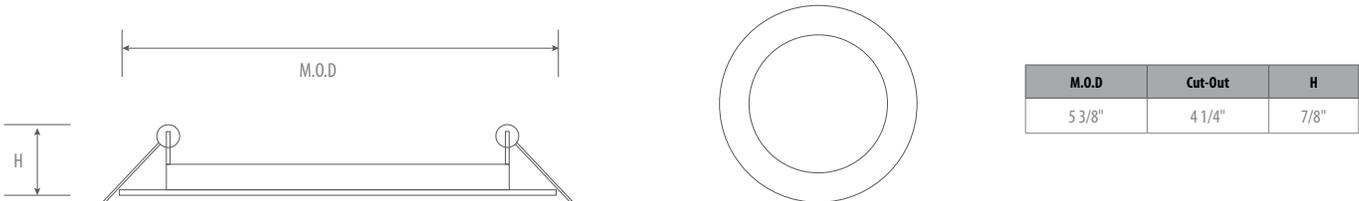

Ordering Information Example: PRO-SP/4/9.5W/30/120/WH/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Finish Color	Dimmable
PRO	SP2 (Slim Panel)	4 (4")	9W	30 (3000K) 40 (4000K)	120 (120V)	WH (White) BK (Black) BN (Brushed Nickel)	TRIAC

Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating(Hrs)	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Case QTY.
3662138	Yes	PRO-SP2/4/9W/30/120/WH/D	9W	120V	60,000	650	3000	≥80	50
3662139	Yes	PRO-SP2/4/9W/40/120/WH/D	9W	120V	60,000	650	4000	≥80	50
3662155	Yes	PRO-SP2/4/9W/30/120/BK/D	9W	120V	60,000	650	3000	≥80	50
3662156	Yes	PRO-SP2/4/9W/30/120/BN/D	9W	120V	60,000	650	3000	≥80	50