

# LED FIXTURE

## PRO Series



### LED Slim Panel PRO-SP5

Slim design allows it to be installed in low plenum ceilings



3-year limited warranty


Operating temperature range -20 °C ~ +40 °C



#### Features & Benefits

cETLus listed, Energy Star  
Type IC rated – approved for direct contact with insulation  
Isolated internal driver in junction box – fast and easy to install  
Finish colour white, PC lens aluminium body  
Dimmable TRIAC down to 10%  
L70 @ 25,000 Hrs, CRI ≥80, FT4 cable  
120° Beam angle  
Wet location rated

#### Dimensional Drawing

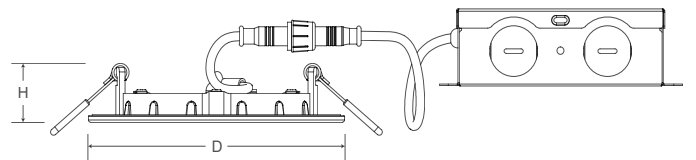

	M.O.D	Cut-out	M.O.H
SP5/4 (4")	4.92"	4.25"	0.96"

#### Ordering Information Example: PRO-SP5/4/8W/MK/120/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Finish Color	Dimmable
PRO	SP5 (Slim panel)	4 (4")	8W	MK (Multiple CCT, 30-40-50K)	120 (120V)	WH (White)	D (TRIAC Dimming)

#### Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Wet Location	Dimension D×H (inch)	Case QTY.
3662164	Yes	PRO-SP5/4/8W/MK/120/WH/D	8	120	25,000	750	30-40-50K	≥80	120°	Yes	4.92" × 0.96"	50