

LED FIXTURE

RIGID Series




LED Centre Basket RGD-CB3

Slim design, 120-347V LED auto-sensing driver
Selectable Wattage and Selectable Kelvin (CCT)



5-year limited warranty


Operating temperature range -20 °C ~ +50 °C

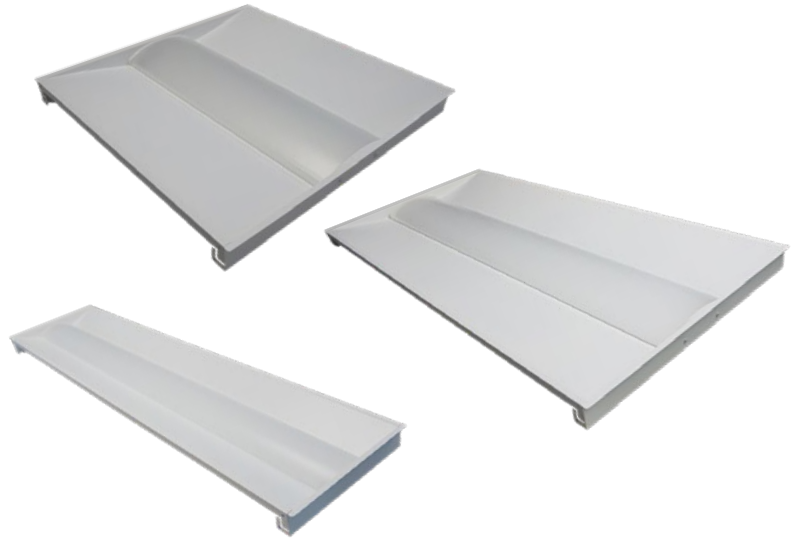

Features & Benefits

cULus listed, DLC Premium
Selectable Wattage and Selectable Kelvin (CCT)
Range of sizes (1'x4', 2'x2', 2'x4' available)
120-347V LED auto-sensing driver
Slim design (2.24" depth), 0-10V dimming
L70@ 50,000 Hrs, CRI≥80
Damp location rated, Type IC
Optional Controls: Daylight; Occupancy PIR BI-LEVEL, sensor factory installed

Dimensional Drawing

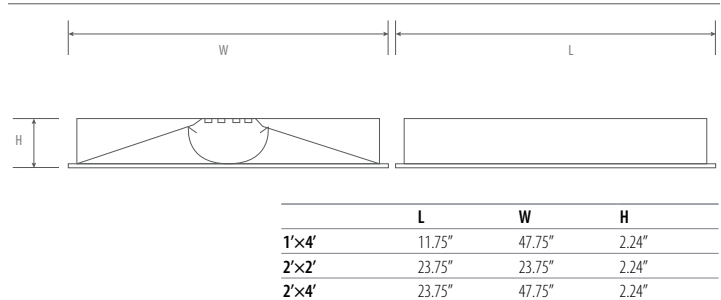

Ordering Information Example: RGD-CB3/14/MW/MK/120-347V/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Option
RGD (Rigid)	CB3 (LED centre basket)	22 (2'x2') 14 (1'x4') 24 (2'x4')	MW (Selectable Wattage)	MK (Selectable Kelvin/CCT)	120-347V	D (0-10V dimming)	MS (Motion sensor)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension (inch)	Case QTY.
3680335	Yes	RGD-CB3/14/MW/MK/120-347V/D	30-25-20	120-347V	50,000	3750-3125-2500	35-40-50	>80	11.75x47.75x2.24	2
3680336	Yes	RGD-CB3/S/22/MW/MK/120-347V/D	30-25-20	120-347V	50,000	3750-3125-2500	35-40-50	>80	23.75x23.75x2.24	2
3680337	Yes	RGD-CB3/22/MW/MK/120-347V/D	35-30-25	120-347V	50,000	4375-3750-3125	35-40-50	>80	23.75x23.75x2.24	2
3680338	Yes	RGD-CB3/M/24/MW/MK/120-347V/D	45-38-34	120-347V	50,000	5625-4750-4250	35-40-50	>80	23.75x47.75x2.24	2
3680339	Yes	RGD-CB3/XL/24/MW/MK/120-347V/D	56-52-46	120-347V	50,000	7000-6500-5750	35-40-50	>80	23.75x47.75x2.24	2