

LED FIXTURE

RIGID Series

LED Flush Mount (Polycarbonate) RGD-FM14/MK/D/SLIM/PC

LED Slim PC round ceiling light
14", 5 Multi-K selectable



Features & Benefits

CETL listed, Energy Star

Size 14", CRI >80


5 CCT colour selectable 2700/3000/3500/4000/5000K

L70 @ 50,000 Hrs

TRIAC dimmable

PMMA diffuser, white finish

Damp location approved

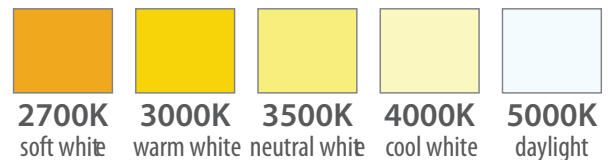

5 CCT Colour Selectable

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -20°C and +40°C


Product Specification

Ordering Code	Energy Star	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CRI	Damp Location	M.O.D. (inch)	Case QTY.
3664155	Y	RGD-FM14/24W/MK/D/SLIM/PC	LED Flush Mount 14" 24W Multiple Kelvin Polycarbonate	24	120	50,000	1800	80	Y	14	8

Applications

Bedrooms, living rooms, hallways, kitchens and etc

Dimensional drawing

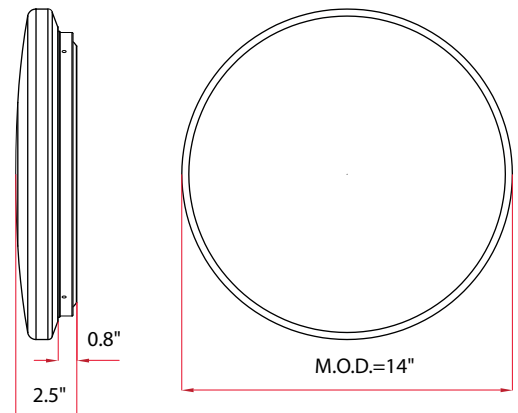

Ordering Information

Example: RGD-FM14/24W/MK/D/SLIM/PC

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Dimmable	Body
RGD (Rigid)	FM14 (LED 14" Flush Mount)	24W	MK (Multiple Kelvin Selection)	D (Dimmable)	SLIM/PC (Slim Polycarbonate)