

LED FIXTURE

SEL Series



LED Round High Lumen HighBay SEL-RHL

120-347V auto-sensing driver, 1-10V dimming
Multiple Wattage & Multiple Kelvin (CCT) selection



5-year limited warranty


Operating temperature range -40 °C ~ +55 °C



Features & Benefits

cULus listed, and NSF rated
System light efficacy 170 LPW, 120-347V auto-sensing driver
White finish, with 3M cable
90° beam spread, PC Lens
Sensor socket supplied and capable
CRI $\geq$ 80, L70 @ 50,000 hrs
IP65, wet location rated

Dimensional Drawing

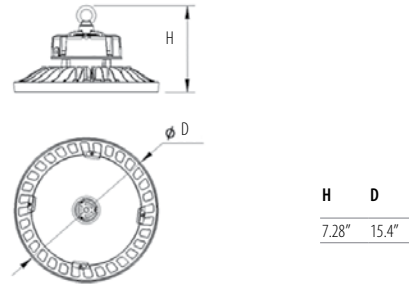

Ordering Information Example: SEL-RHL/300L/MW/MK/120-347V/HK/D

Family Name	Fixture Type	Wattage	CCT	Voltage	Installation
SEL (Select)	RHL (Round High Lumen)	MW (Multi Wattage, Max. 300W)	MW (Multi CCT)	120-347V	HK (Hook)

Product Specification

Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension D x H (inch)	Case QTY.
SEL-RHL/300L/MW/MK/120-347V/HK/D	300-270-240	120-347V	50,000	51000-45900-40800	40-50	>80	Yes	15.4x7.28	1