



LED FIXTURE

SSL Series



LED Area Light SSL-AL2

Outstanding photometric performance, excellent uniform illumination, low profile construction, high efficacy and long lifespan, it's ideal for commercial lighting application.



100W & 150W



200W



240W & 300W



Features & Benefits

cULus listed

120-347 Auto Sensing driver, 1-10V dimming

Lighting Efficiency 140lm/W

Optional installation of **Slipfitter**, **Yoke**, **Trunnion** and **Pole Mount**
Mounting ordered separately

IES Type V, Type IV and Type III for optimized light distribution
(Type III is default, Type V lens and Type IV lens ordered separately)

Cast aluminium design, Dark Bronze

5000K and 4000K available

CRI>80, L70 @ 50,000 Hrs

IP65 rated, wet location

Area light is complete with installed photocell receptacle and "Shorting Cap"
for ease of photocell application if desired.
Photocell is an option and sold separately.


Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +45°C

Applications

Parks, Shopping Malls, Outlets, Parking Lots, Historical Sites, Road Lighting

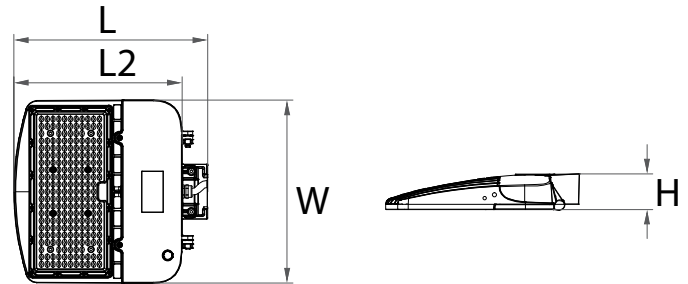


Ordering Information


 Example: SSL-AL2/T3/100W/40/120-347V/DB/D/SCR

Family Name	Fixture Type	Light Distribution Type	Wattage	CCT	Voltage (V)	Body Finish	Dimmable	Others	Options
SSL (Solid State Lighting)	AL2 (Area Lighter-AL2)	T3 (Type III)*	100W 150W 200W 240W 300W	40 (4000K) 50 (5000K)	120-347V	DB (Dark Bronze)	D (Dimmable)	SCR (shorting cap receptacle)	SSL-AL2/SSF-MTG/DB SSL-AL2/SQ-RD-POLE-MTG/DB SSL-AL2/TRUN-MTG/DB SSL-AL2/YOKEM-MTG/DB SSL-AL2/YOKEL-MTG/DB SSL-AL2/UNV-PC SSL-AL2/HVU-PC SSL-AL2/T4-S/LENSSL SSL-AL2/T4-S/LENSM SSL-AL2/T5/LENSSL SSL-AL2/T5/LENSM SSL-AL/WP/WC SSL-AL/WALL-MTG/DB


* Type III is default, you can order the optional lens separately for Type V (T5) and Type IV (T4).




SSL-AL2/SSF-MTG/DB



SSL-AL2/SQ-RD-POLE-MTG/DB



SSL-AL2/TRUN-MTG/DB



SSL-AL2/YOKEM-MTG/DB
SSL-AL2/YOKEL-MTG/DB



SSL-AL2/UNV-PC
SSL-AL2/HVU-PC



SSL-AL2/T4-S/LENS
SSL-AL2/T5/LENS

LED Area Light

SSL-AL2

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension L×W×H - L2 (inch)	Case QTY.
3666318	SSL-AL2/T3/100W/40/120-347V/DB/D/SCR	100	120-347	50,000	Type III	14,000	4000	80	13.14 X 12.4 X 2.42 - 11.41	1
3666319	SSL-AL2/T3/100W/50/120-347V/DB/D/SCR	100	120-347	50,000	Type III	14,000	5000	80	13.14 X 12.4 X 2.42 - 11.41	1
3667304	SSL-AL2/T3/150W/40/120-347V/DB/D/SCR	150	120-347	50,000	Type III	21,000	4000	80	13.14 X 12.4 X 2.42 - 11.41	1
3667305	SSL-AL2/T3/150W/50/120-347V/DB/D/SCR	150	120-347	50,000	Type III	21,000	5000	80	13.14 X 12.4 X 2.42 - 11.41	1
3667306	SSL-AL2/T3/200W/40/120-347V/DB/D/SCR	200	120-347	50,000	Type III	28,000	4000	80	14.84 X 12.4 X 2.42 - 13.11	1
3667307	SSL-AL2/T3/200W/50/120-347V/DB/D/SCR	200	120-347	50,000	Type III	28,000	5000	80	14.84 X 12.4 X 2.42 - 13.11	1
3667308	SSL-AL2/T3/240W/40/120-347V/DB/D/SCR	240	120-347	50,000	Type III	33,600	4000	80	22.72 X 12.4 X 2.42 - 20.99	1
3667309	SSL-AL2/T3/240W/50/120-347V/DB/D/SCR	240	120-347	50,000	Type III	33,600	5000	80	22.72 X 12.4 X 2.42 - 20.99	1
3668303	SSL-AL2/T3/300W/40/120-347V/DB/D/SCR	300	120-347	50,000	Type III	42,000	4000	80	22.72 X 12.4 X 2.42 - 20.99	1
3668304	SSL-AL2/T3/300W/50/120-347V/DB/D/SCR	300	120-347	50,000	Type III	42,000	5000	80	22.72 X 12.4 X 2.42 - 20.99	1
3660169	SSL-AL2/SSF-MTG/DB	Male Adjustable Slip Fitter, Dark Bronze (Fits 2 3/8" Tenon)								
3660170	SSL-AL2/SQ-RD-POLE-MTG/DB	Universal Male Straight Arm for Square/Round Pole , Dark Bronze								
3660172	SSL-AL2/TRUN-MTG/DB	Male Adjustable Trunnion Mounting, Dark Bronze								
3660174	SSL-AL2/YOKEM-MTG/DB	Yoke mounting, Dark Bronze (for 100W, 150W and 200W units)								
3660175	SSL-AL2/YOKEL-MTG/DB	Yoke mounting, Dark Bronze (for 240W and 300W units)								
3660177	SSL-AL2/UNV-PC	Photocell control (120 -277V)								
3660178	SSL-AL2/HVU-PC	Photocell control (120-347V)								
3660179	SSL-AL2/T4-S/LENSSSL	SSL-AL2 Type IV Lens (for 100W, 150W, 240W and 300W units)								
3660180	SSL-AL2/T4-S/LENSM	SSL-AL2 Type IV Lens (for 200W unit)								
3660181	SSL-AL2/T5/LENSSSL	SSL-AL2 Type V Lens (for 100W, 150W, 240W and 300W units)								
3660182	SSL-AL2/T5/LENSM	SSL-AL2 Type V Lens (for 200W unit)								
3660084	SSL-AL/WP/WC	SSL-AL wire to wire connector IP68, 450VAC, GA, AWG 20-14 Black								
3660093	SSL-AL/WALL-MTG/DB	L-Shaped wall mounted bracket, Steel, Dark Bronze, Base W4"xH4", 2 3/8" O.D. tube, 8"H x 4" off-set								

Mounting Options

