



LED FIXTURE

SSL Series



LED Circular HighBay SSL-CHB

120-347V Auto-Sensing Driver
1-10V dimming
Multiple Wattage and Multiple Kelvin (CCT) Selection



Features & Benefits

cULus listed

System light efficacy 145+ LPW

2 Fixture selection offers 18 solutions per fixture

Switchable CCT (30K/40K/50K), Switchable Wattage

White finish, with 10' power cord

1-10V DC dimming option

IP65 rated, wet location

Default Hook Mounting, Yoke Mount optional ordered separately

CRI≥80, L70@ 50,000 Hrs

Voltage 120-347V Auto-Sensing

90° Beam spread, PC Lens

Installed sensor socket allows for ease of sensor installation, sensor sold separately

Warranty


5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +55°C


Applications

Warehouse/Manufacturing Facilities, Convention Centers/Sporting Arenas
Big-Box Retail Stores, Cold Storage Facilities, Gymnasiums

Dimensional drawing

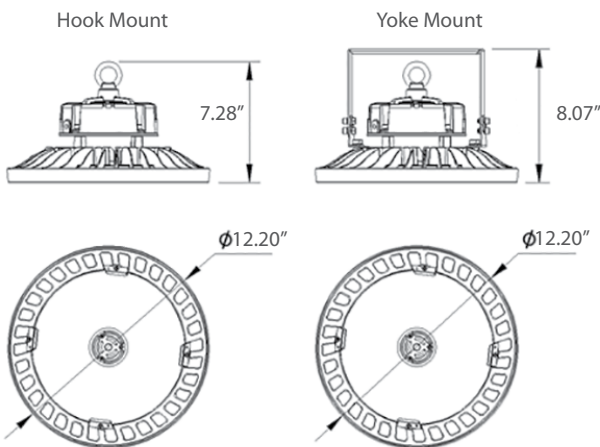

SSL-CHB/150M

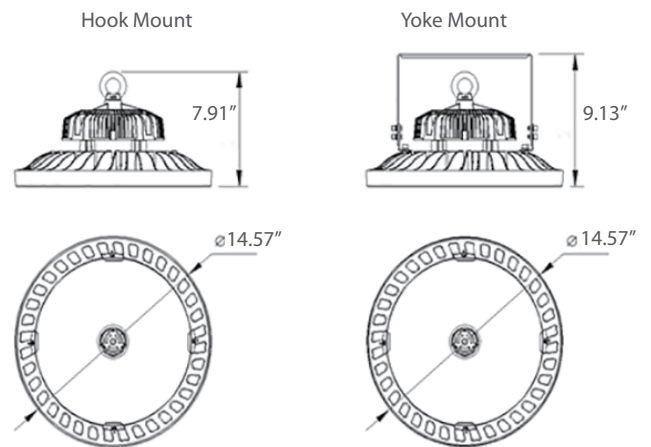

SSL-CHB/240L



LED Circular HighBay

SSL-CHB

Ordering Information Example: SSL-CHB/150M/MW/MK/120-347V/HK/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Installation	Dimmable	Options
SSL (Solid State Lighting)	CHB (Circular Highbay)	150M (Max 150w Medium Size) 240L (Max 240w Large Size)	MW (Multi Wattage)	MK (Multi CCT)	120-347V	HK (Hook)	D (Dimmable)	SSL-CHB/LV/12V/SENSOR SSL-CHB/LV/12/CONTROLLER SSL-CHB/150M/PC/HOOD SSL-CHB/240L/PC/HOOD SSL-CHB/150M/PC/LENS SSL-CHB/240L/PC/LENS SSL-CHB/150M/WG SSL-CHB/240L/WG SSL-CHB/YOKE SSL-CHB/PEN/ADT

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Optics/ Distribution	Dimension DIA×H(inch)*	Case QTY.
3680300	SSL-CHB/150M/MW/MK/120-347V/HK/D	150-120-90	120-347V	50,000	22600-18500-14700	30-40-50	≥80	Type V	12.20×7.28	1
3680301	SSL-CHB/240L/MW/MK/120-347V/HK/D	240-210-180	120-347V	50,000	38400-33300-30500	30-40-50	≥80	Type V	14.57×7.91	1
3660159	SSL-CHB/LV/12V/SENSOR	SSL CHB HighBay LED 12V DC Microwave Sensor								
3660160	SSL-CHB/LV/12/CONTROLLER	SSL CHB HighBay 12V DC Microwave Sensor Remote Control (required for programing)								
3660161	SSL-CHB/150M/PC/HOOD	SSL CHB Polycarbonate Hood for 150M								
3660162	SSL-CHB/240L/PC/HOOD	SSL CHB HighBay Polycarbonate Hood for 240L								
3660163	SSL-CHB/150M/PC/LENS	SSL CHB HighBay Polycarbonate Lens for 150M								
3660164	SSL-CHB/240L/PC/LENS	SSL CHB HighBay Polycarbonate Lens for 240L								
3660165	SSL-CHB/150M/WG	SSL CHB HighBay Wire Guard for 150M								
3660166	SSL-CHB/240L/WG	SSL CHB HighBay Wire Guard for 240L								
3660167	SSL-CHB/YOKE	SSL CHB HighBay Optional Yoke Mount								
3660168	SSL-CHB/PEN/ADT	SSL CHB HighBay Optional 3/4" Pendant Adapter to be installed on Yoke Mount Bracket.								

*Height with Hook Mount



SSL-CHB/SENSOR



SSL-CHB/CONTROLLER



SSL-CHB/PC/HOOD



SSL-CHB/PC/LENS




SSL-CHB/WG



SSL-CHB/YOKE



SSL-CHB/PEN/ADT



Twist locked DC sensor
(sold separately)

