



LED FIXTURE

SSL Series



LED Canopy SSL-CP3

Ultra-thin design allows for use in low ceiling applications.
120-347V Auto-Sensing Driver
0-10V dimming
Multiple Wattage and Multiple Kelvin Selection



Features & Benefits

cULus listed

120-347V Auto Sensing driver, 0-10V dimming

Switchable CCT (30K/40K/50K), Switchable Wattage

Die-cast aluminum with durable dark bronze coat finish

IP65, wet location rated

CRI≥70, L70 @ 100,000 Hrs, 150° Beam angle

Suitable for J-BOX mounting, and pendant mounting

PC Lens clear

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +40°C

Applications


Parking structures, storage areas, shopping area walkways, entryway, and low level security

Ordering Information

Example: SSL-CP3/40W/MK/120-347V/D/DB

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Dimmable	Finish
SSL (Solid State Lighting)	CP3 (LED Canopy)	40W 60M (60-40-28) MW (Multiple Wattage)	MK (Multiple Kelvin)	120-347V	D (Dimmable)	DB (Dark Bronze)

Dimensional drawing

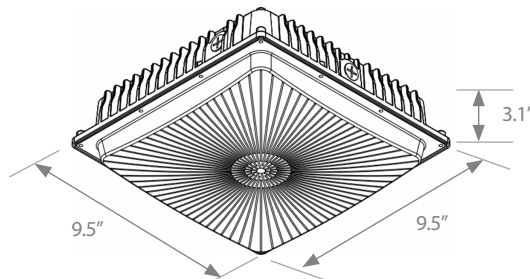

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
3665315	SSL-CP3/40W/MK/120-347V/D/DB	40	120-347	50,000	H150° x V150°	5200	30-40-50	70	9.5" x 9.5" x 3.1"	5
3680306	SSL-CP3/60M/MW/MK/120-347V/D/DB	60-40-28	120-347	50,000	H150° x V150°	7800-5200-3640	30-40-50	70	9.5" x 9.5" x 3.1"	5